




**MULTISPACER** Removable and reusable spacer for joints of tiled floors and walls. Its little tabs and open shape allows various uses with a perfect joint and view of the junctions among tiles during the laying.

**MULTISPACER**

**PATENTED**

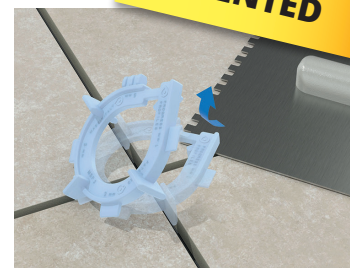

#### MULTISPACER

Article	Thick. mm	Pcs/pack	Pcs/Box		
MSP 1	1	100	2500		
MSP 2	2	100	2500		
MSP 3	3	100	2500		
MSP 5	5	100	2500		




The **CROSS-SHAPED** and **T-SHAPED SPACERS** are perforated, weatherproof and made in top quality material with choice of colour. They are used to provide regular gaps in floors and coverings and thanks to the anti-floating perforations remain in the correct laying position. Available in every required thickness 1 - 2 - 3 - 4 - 5 - 7 - 10 mm. Levelling wedges are also available for compensating differences in level that emerge during laying. The **Y-SHAPED SPACERS** have to be used to separate hexagonal tiles in floors and walls. Available in thickness 2 and 3 mm.

## SPACERS LEVELLING WEDGES

#### PERFORATED SPACERS CROSS-SHAPED boxes with bags of 250 Pcs each

Article	Thick. mm	Pcs/Box		
RC 1	1	20.000		
RC 2	2	15.000		
RC 3	3	15.000		
RC 4	4	15.000		
RC 5	5	15.000		
RC 7	7	10.000		
RC 10	10	5.000		

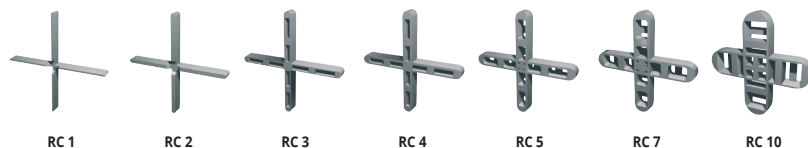


#### PERFORATED SPACERS T-SHAPED boxes with bags of 250 Pcs each

Article	Thick. mm	Pcs/Box		
RT 1	1	20.000		
RT 2	2	15.000		
RT 3	3	15.000		
RT 4	4	15.000		
RT 5	5	15.000		
RT 7	7	10.000		
RT 10	10	5.000		




#### Y-SHAPED SPACERS FOR HEXAGONAL TILES boxes with bags of 250 Pcs each

Article	Thick. mm	Pcs/Box		
RY 2	2	10.000		
RY 3	3	10.000		



#### LEVELLING WEDGES boxes with bags of 500 Pcs

Article	Thick. mm	Pcs/Box		
PCU 5	0 - 5	10.000		



#### SPACERS / SQ.M

TILE FORMAT cm x cm	60 x 60	60 x 30	40 x 40	40 x 30	40 x 20	33 x 33	30 x 30	30 x 20	25 x 25	20 x 20	15 x 15	13 x 26	13 x 13	10 x 20	10 x 10
CROSS-SHAPED SPACERS No. / Sq.m	3	6	7	9	12	9	11	17	16	25	44	30	60	50	100
T-SHAPED SPACERS No. / Sq.m	6	12	14	18	24	18	22	34	32	50	88	60	120	100	200

#### Y-SHAPED SPACERS

2 spacers for each tile multiplied by the amount of tiles per square meter