



Leveling system for tiles composed of 3 elements: wedge, leveler and plier.
The levelers are available for grout lines of 1/1.5/2 and 3 mm and are suitable for tiles with thickness from 3 to 12 mm and from 12 to 20 mm. The wedge, with a length of 90 mm and a width of 22 mm, is inserted during the laying inside the leveler and thanks to the plier we get a complete flatness between adjacent tiles. When the adhesive is hardened, kick the wedges and the protruding part of the levelers along the grout line.

PROLEVELING WEDGE SYSTEM


PATENTED

PROLEVELING WEDGE SYSTEM

Article	Description	h. mm	Thick. mm	Pcs/pack	Pcs/Box
PRLW	Leveling wedge	-	-	100	2500
PRLW 1	Linear leveler thick 1 mm	3-12	1	200	3000
PRLW 15	Linear leveler thick 1,5 mm	3-12	1,5	200	3000
PRLW 2	Linear leveler thick 2 mm	3-12	2	200	3000
PRLW 3	Linear leveler thick 3 mm	3-12	3	200	3000
PRLW 120	Linear leveler thick 1,5 mm	12-20	1,5	200	3000
PRLW 220	Linear leveler thick 2 mm	12-20	2	200	3000

X cm	INDICATIVE CONSUMPTIONS FOR A SURFACE OF 10 m ²																		
10	1980																		
15	1317	876																	
20	495	328	490																
25	396	263	391	312															
30	660	438	488	389	431														
35	495	328	365	291	322	240													
40	440	292	324	258	285	213	189												
45	396	263	291	232	256	191	169	152											
50	360	239	264	211	232	173	154	138	125										
55	330	219	242	193	212	158	141	126	114	105									
75	396	263	258	206	212	158	140	126	114	104	99								
80	371	246	241	192	198	148	131	117	107	97	87								
90	330	219	214	171	176	131	116	104	94	86	82	77	68						
100	297	197	192	153	157	117	104	93	84	77	73	68	61	54					
120	330	219	200	160	157	117	104	93	84	77	71	66	59	52	49				
150	330	219	192	153	146	109	96	86	78	71	64	60	53	47	44	38			
180	330	219	186	149	139	103	91	82	74	68	60	56	49	44	40	34	31		
200	347	230	192	153	140	104	92	83	75	68	59	55	49	44	39	33	30	28	
	10	15	20	25	30	35	40	45	50	55	75	80	90	100	120	150	180	200	Y cm

Ex: 120 X 45 cm = 93 pz X 10 m2

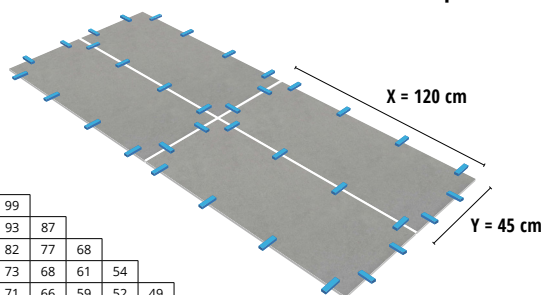

TRACTION PLIER for PROLEVELING WEDGE SYSTEM

Article	Pcs/pack
PRLWP	1




MULTISPACER Removable and reusable spacer for joints of tiled floors and walls. Its little tabs and open shape allows various uses with a perfect joint and view of the junctions among tiles during the laying.

MULTISPACER

PATENTED

MULTISPACER

Article	Thick. mm	Pcs/pack	Pcs/Box
MSP 1	1	100	2000
MSP 2	2	100	2000
MSP 3	3	100	2000
MSP 5	5	100	2000

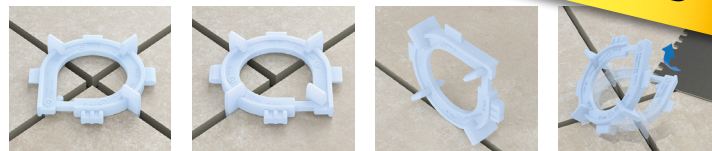

The **CROSS-SHAPED** and **T-SHAPED SPACERS** are perforated, weatherproof and made in top quality material with choice of colour. They are used to provide regular gaps in floors and coverings and thanks to the anti-floating perforations remain in the correct laying position. Available in every required thickness 1 - 2 - 3 - 4 - 5 - 7 - 10 mm. Levelling wedges are also available for compensating differences in level that emerge during laying. The **Y-SHAPED SPACERS** have to be used to separate hexagonal tiles in floors and walls. Available in thickness 2 and 3 mm.

SPACERS LEVELLING WEDGES

PERFORATED SPACERS CROSS-SHAPED

boxes with bags of 250 Pcs each

Article	Thick. mm	Pcs/Box
RC 1	1	20.000
RC 2	2	15.000
RC 3	3	15.000
RC 4	4	15.000
RC 5	5	15.000
RC 7	7	10.000
RC 10	10	5.000

PERFORATED SPACERS T-SHAPED


boxes with bags of 250 Pcs each

Article	Thick. mm	Pcs/Box
RT 1	1	20.000
RT 2	2	15.000
RT 3	3	15.000
RT 4	4	15.000
RT 5	5	15.000
RT 7	7	10.000
RT 10	10	5.000

Y-SHAPED SPACERS FOR HEXAGONAL TILES

boxes with bags of 250 Pcs each

Article	Thick. mm	Pcs/Box
RY 2	2	10.000
RY 3	3	10.000

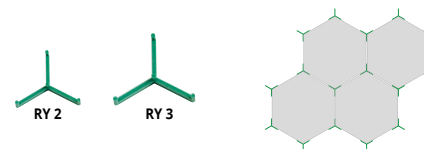

SPACERS / SQ.M

TILE FORMAT cm x cm	60 x 60	60 x 30	40 x 40	40 x 30	40 x 20	33 x 33	30 x 30	30 x 20	25 x 25	20 x 20	15 x 15	13 x 26	13 x 13	10 x 20	10 x 10
CROSS-SHAPED SPACERS No. / Sq.m	3	6	7	9	12	9	11	17	16	25	44	30	60	50	100
T-SHAPED SPACERS No. / Sq.m	6	12	14	18	24	18	22	34	32	50	88	60	120	100	200
Y-SHAPED SPACERS	2 spacers for each tile multiplied by the amount of tiles per square meter														

LEVELLING WEDGES

boxes with bags of 500 Pcs

Article	Thick mm	Pcs/Box
PCU 5	0 - 5	10.000

