



# PROSKIRTING CHANNEL



## DESCRIPTION


**PROSKIRTING CHANNEL** is an aluminium skirting board profile conveniently designed to be recessed into plasterboard walls. The profile, after laying, thanks to its particular geometry, is perfectly aligned with the wall except for a small cavity with a height of 4 mm on the top, which gives it a modern and elegant design.

## MATERIAL

**PROSKIRTING CHANNEL** is a skirting board profile, with a height of 60 mm. It is composed of a pre-punched natural aluminium support that must be fixed with screws every 50 cm, and a profile to fix to the support. Available in anodized silver aluminium, brushed silver aluminium and white varnished aluminium. It allows the installation of low-voltage electric cables like web, computer, telephone and satellite TV cables that will always be easily accessible. Equipped with an external corner. **PROSKIRTING CHANNEL**, after laying, thanks to its particular geometry, is perfectly aligned with the wall except for a small cavity with a height of 4 mm on the top, which gives it a modern and elegant design.

## AREAS OF USE

**PROSKIRTING CHANNEL** in aluminium is suitable for every indoors environment.

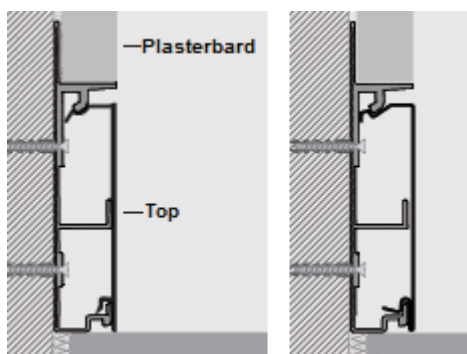

## WARNINGS


Do not use **PROSKIRTING CHANNEL** in aluminium, outdoor and in environments where aggressive substances are present.

## MAINTENANCE

**PROSKIRTING CHANNEL** does not require any special maintenance; it is suggested to clean it with normal household cleaning products.

## LAYING INSTRUCTIONS

1. Choose "**PROSKIRTING CHANNEL**" in the desired finish.
2. Fix the pre-punched support to the wall with screws.
3. Lay the plasterboard aligning it on the bottom with the support.
4. Grout the plasterboard and apply the desired finish.
5. If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV.
6. Attach the profile to the support applying low pressure.

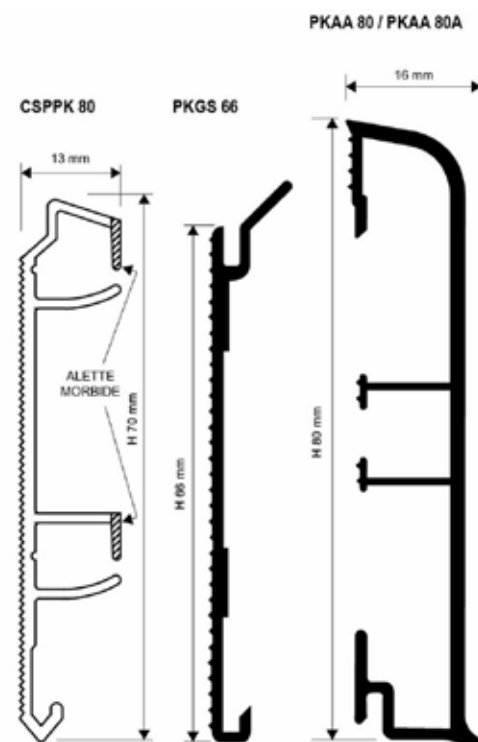

## TEXT TEMPLATE FOR TENDERS

Delivery and installation of skirting board profile, with a height of 60 mm. It is composed of a pre-punched natural aluminium support, that can be fixed to the wall with screws and an anodized silver aluminium / brushed silver aluminium / white varnished aluminium profile to fix to the support. The profile allows the installation of low-voltage electric cables that will always be easily accessible. On the top of the profile there is a small cavity with a height of 4 mm, like **PROSKIRTING CHANNEL** of the Progress Profiles company.

**PKCH... 55/55-01** : Anodized, brushed and varnished aluminium.

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt