



PROJOLLY SQUARE

POLISHED, SUPER POLISHED, SANDED AND BRUSHED STAINLESS STEEL AISI 304/1.4301-V2A

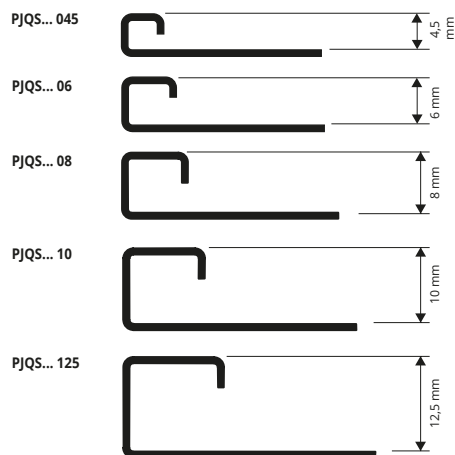

PJQSAC/S 11 & PJQSACML 11 AVAILABLE H 11 MM
PJQSAC/S 15 & PJQSACML 15 AVAILABLE H 15 MM

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

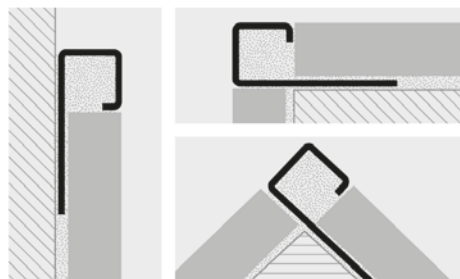

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

PROJOLLY SQUARE is a square corner bead profile in polished, super polished, sanded, brushed stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section, the availability in three different finishes and special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.



POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - Pack 20 Pcs - 54 lm (H 4,5 - 108 lm) - 8/10 mm

Article	H mm		
PJQSAC 045	4,5		
PJQSAC 06	6		
PJQSAC 07	7		
PJQSAC 08	8		
PJQSAC 09	9		
PJQSAC 10	10		
PJQSAC 11	11		
PJQSAC 125	12,5		
PJQSAC 15	15		

SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A
thermo Packed
bar length 2,7 lm - Pack 20 Pcs - 54 lm - 8/10 mm

Article	H mm		
PJQSACML 045	4,5		
PJQSACML 06	6		
PJQSACML 07	7		
PJQSACML 08	8		
PJQSACML 09	9		
PJQSACML 10	10		
PJQSACML 11	11		
PJQSACML 125	12,5		
PJQSACML 15	15		

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.



Brushed STAINLESS ST. AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - Pack 20 Pcs - 54 lm (H 4,5 - 108 lm) - 8/10 mm

Article	H mm		
PJQSACS 045	4,5		
PJQSACS 06	6		
PJQSACS 07	7		
PJQSACS 08	8		
PJQSACS 09	9		
PJQSACS 10	10		
PJQSACS 11	11		
PJQSACS 125	12,5		
PJQSACS 15	15		

SANDED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - Pack 20 Pcs - 54 lm - 8/10 mm

Article	H mm		
PJQSACSB 07	7		
PJQSACSB 08	8		
PJQSACSB 09	9		
PJQSACSB 10	10		
PJQSACSB 125	12,5		

COLOURS



ACSB - SPECIAL FINISH, REQUEST AVAILABILITY

CAPSULES, END CAPS and THREE-WAYS JOINTS

POLISHED, SUPER POLISHED, SATIN AND SANDED FINISH ST. STEEL AISI 304/1.4301-V2A / PLASTIC

* Capsules & end caps of the on demand profiles are also on demand

CAPSULES and END CAPS - POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
CPJQSAC .../...	045/06/07/08/09/10/11/125/15		
TPJQSAC .../...	045/06/07/08/09/10/11/125/15		

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQSAC 045/10

CAPSULES and END CAPS - SANDED STAINLESS STEEL AISI 304/1.4301-V2A

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
CPJQSACSB .../...	07/08/09/10/125		
TPJQSACSB .../...	07/08/09/10/125		

Choose the desired pack. & height
Ex.: 8 mm capsule in 10 Pcs Pack - CPJQSACSB 08/10

CAPSULES and END CAPS - BRUSHED STAINLESS ST. AISI 304/1.4301-V2A

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
CPJQSACS .../...	045/06/07/08/09/10/11/125/15		
TPJQSACS .../...	045/06/07/08/09/10/11/125/15		

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQSACS 045/10

JOINTS - PLASTIC


Article	H mm	Pack 10 Pcs	Pack 2 Pcs
GIJQ .../...	045/06/07/08/09/10/11/125/15		

Choose the desired pack. & height
Ex.: 4,5 mm joint in 10 Pcs Pack - GIJQ 045/10

CAPSULES - SUPER POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
CPJQSACML .../...	045/06/07/08/09/10/11/125/15		
TPJQSACML .../...	045/06/07/08/09/10/11/125/15		

Choose the desired pack. & height
Ex.: 4,5 mm capsule in 10 Pcs Pack - CPJQSACML 045/10

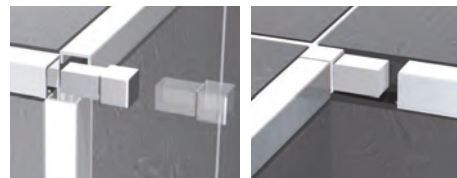

JOINT

CAPSULE

END CAP




GIJQ .../...



CPJQS .../...



TPJQS .../...



News 2023

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

PROJOLLY SQUARE is a square corner bead profile in polished stainless steel AISI 304/1.4301-V2A that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and also as separation profile for floor and wall coverings. Its particular section and the availability of special pieces such as internal and external corners, end caps and joints make **PROJOLLY SQUARE** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PROJOLLY SQUARE

POLISHED, BRUSHED STAINLESS STEEL
AISI 316LL/1.4404-V4A




POLISHED STAINLESS STEEL AISI 316LL/1.4404-V4A
with protective film
bar length 2,7 LM - Pack 20 Pcs - 54 lm - 8/10 mm



Article	H mm		
PJQSACM 08	8		
PJQSACM 10	10		
PJQSACM 11	11		
PJQSACM 125	12,5		

COLOURS



ACM - Polished stainless st.
AISI 316LL




BRUSHED STAINLESS STEEL AISI 316LL/1.4404-V4A
with protective film
bar length 2,7 LM - Pack 20 Pcs - 54 lm - 8/10 mm




Article	H mm		
PJQSACMS 10	10		
PJQSACMS 11	11		
PJQSACMS 125	12,5		

COLOURS



ACMS - Brushed stainless st.
AISI 316LL

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

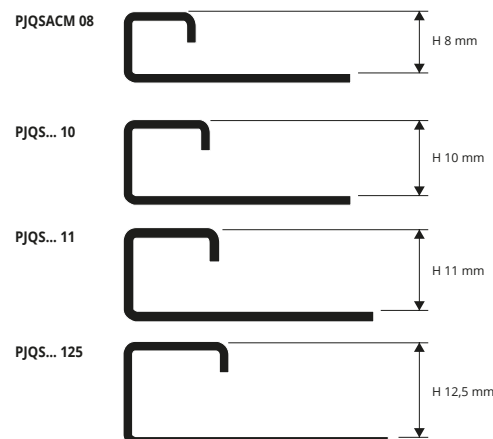

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROJOLLY SQUARE" according to the tile thickness and desired finish. 2. Cut "PROJOLLY SQUARE" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROJOLLY SQUARE" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

CAPSULES, END CAPS and THREE-WAYS JOINTS

STAINLESS STEEL AISI 316LL

Capsules & end caps of the on demand profiles are also on demand *

CAPSULES and END CAPS - POLISHED STAINLESS STEEL AISI 316LL/1.4404

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
CPJQSACM .../...	08/10/11/12,5		
TPJQSACM .../...	08/10/11/12,5		

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs PACMk - CPJQSACM 10/10

CAPSULES and END CAPS - BRUSHED STAINLESS STEEL AISI 316LL/1.4404


Article	H mm	Pack 10 Pcs	Pack 2 Pcs
CPJQSACMS .../...	10/11/125		
TPJQSACMS .../...	10/11/125		

Choose the desired pack. & height
Ex.: 10 mm capsule in 10 Pcs PACMk - CPJQSACMS 10/10

JOINTS - PLASTIC

Article	H mm	Pack 10 Pcs	Pack 2 Pcs
GIJQ .../...	08/10/11/125		

Choose the desired pack. & height
Ex.: 8 mm joint in 10 Pcs Pack - GIJQ 08/10



END CAP



TPJQSACM .../...

CAPSULE



CPJQSACM .../...

JOINT



GIJQ .../...



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed