

**PROLISTEL ALL** is a listel in anodized, polished and brushed aluminium with a rounded visible surface, suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL P ALL** a much sought after profile. It can be used with the range of PROJOLLY profiles to decorate the wall coverings and to allow an elegant workmanlike application.


# PROLISTEL ALL

ANODIZED, POLISHED AND BRUSHED ALUMINIUM



**ANODIZED ALUMINIUM** (silver-gold-copper-titanium-black)  
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article  | H mm |      |       |
|----------|------|------|-------|
| PLTAA 15 | 15   | 5,73 | 15,47 |
| PLTAR 15 | 15   | 7,01 | 18,93 |
| PLTAT 15 | 15   | 7,01 | 18,93 |
| PLTAO 15 | 15   | 5,73 | 15,47 |
| PLTNE 15 | 15   | 7,10 | 19,17 |
| PLTAA 25 | 25   | 7,15 | 19,31 |
| PLTAR 25 | 25   | 9,12 | 24,62 |
| PLTAT 25 | 25   | 9,12 | 24,62 |
| PLTAO 25 | 25   | 7,15 | 19,31 |
| PLTNE 25 | 25   | 9,25 | 24,98 |

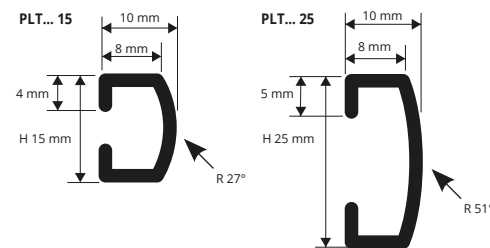

**POLISHED ALUMINIUM** (chrome-gold-copper-titanium-black)  
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article  | H mm |  |   |
|----------|------|--|---|
| PLTBC 15 | 15   |  |   |
| PLTBR 15 | 15   |  | * |
| PLTBT 15 | 15   |  | * |
| PLTBO 15 | 15   |  | * |
| PLTBN 15 | 15   |  | * |
| PLTBC 25 | 25   |  |   |
| PLTBR 25 | 25   |  | * |
| PLTBT 25 | 25   |  | * |
| PLTBO 25 | 25   |  | * |
| PLTBN 25 | 25   |  | * |

**BRUSHED POLISHED ALUMINIUM** (silver-gold-copper-titanium-black)  
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

| Article   | H mm |  |   |
|-----------|------|--|---|
| PLTBS 15  | 15   |  | * |
| PLTRS 15  | 15   |  | * |
| PLTTS 15  | 15   |  | * |
| PLTBOS 15 | 15   |  | * |
| PLTNS 15  | 15   |  | * |
| PLTBS 25  | 25   |  | * |
| PLTRS 25  | 25   |  | * |
| PLTTS 25  | 25   |  | * |
| PLTBOS 25 | 25   |  | * |
| PLTNS 25  | 25   |  | * |

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROLISTEL ALL" according to the width and desired finish.
2. Cut "PROLISTEL ALL" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press "PROLISTEL ALL" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

### COLOURS

| ANODIZED                   |                              |                           | POLISHED                   |                              | BRUSHED POLISHED                   |                                      |
|----------------------------|------------------------------|---------------------------|----------------------------|------------------------------|------------------------------------|--------------------------------------|
| AA - Anodized silver alum. | AT - Anodized titanium alum. | NE - Anodized black alum. | BC - Polished chrome alum. | BT - Polished titanium alum. | BS - Brushed polished silver alum. | TS - Brushed Polished titanium alum. |

AVAILABLE MINIMUM QUANTITY 100 PCS by colour and height (Price to be agreed. Production delay 4/5 weeks)


| ANODIZED                 |                            |                          | POLISHED                   |                           |                          | BRUSHED POLISHED                   |                                   |  |
|--------------------------|----------------------------|--------------------------|----------------------------|---------------------------|--------------------------|------------------------------------|-----------------------------------|--|
| AO - Anodized Gold alum. | AR - Anodized copper alum. | BO - Polished Gold alum. | BR - Polished copper alum. | BN - Polished black alum. | BOS - Brushed Gold alum. | RS - Brushed Polished copper alum. | NS - Brushed Polished black alum. |  |

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.

**PROLISTEL LED** is a listel in anodized and polished aluminium equipped with an integrated LED lighting system that can generate a cold, hot and neutral suffused light. It is suitable to decorate the wall coverings in ceramic, mosaic and natural stone. Its particular section and availability in different finishes, make **PROLISTEL LED** a much sought after profile that decorates the wall coverings.

# PROLISTEL LED

ANODIZED AND POLISHED ALUMINIUM



**ANODIZED ALUM. SILVER, POLISHED CHROME ALUMINIUM**  
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm  
ADAPTOR LED, LED & FLAT NOT INCLUDED

| Article     | H mm |  |  |
|-------------|------|--|--|
| PLTLEDA 20  | 20   |  |  |
| PLTLEDBC 20 | 20   |  |  |

**ADHESIVE FLEXIBLE LED COIL**  
length 5 lm - pack. 1 ROLL

| Article |  |  |  |
|---------|--|--|--|
| LEDN    |  |  |  |
| LEDF    |  |  |  |
| LEDC    |  |  |  |

### COLOURS

|                            |                            |
|----------------------------|----------------------------|
| AA - Anodized silver alum. | BC - Polished chrome alum. |
|----------------------------|----------------------------|

**POLYCARBONATE FLAT** bar length 2,7 lm - pack. 20 Pc - 54 lm  
(AL = transparent / AO = matt)

| Article |  |  |  |
|---------|--|--|--|
| PIAL 17 |  |  |  |
| PIAO 17 |  |  |  |

**END CAPS - R/L** (3 right & 3 left)

| Article      | H mm |  |  |
|--------------|------|--|--|
| TPLTLEDA 20  | 20   |  |  |
| TPLTLEDBC 20 | 20   |  |  |

**LED ADAPTOR AC/DC 75W - 12V (15 lm)**

| Article  |  |  |  |
|----------|--|--|--|
| ALL 7512 |  |  |  |

**LED ADAPTOR AC/DC 25W - 12V (5 lm)**

| Article  |  |  |  |
|----------|--|--|--|
| ALL 2512 |  |  |  |

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROLISTEL LED" according to the width and desired finish.
2. Cut "PROLISTEL LED" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press "PROLISTEL LED" into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

\* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed