

PROEDGE R AC is a corner bead profile in polished and brushed stainless steel AISI 304/1.4301-V2A, with a radius of curvature of 5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE R AC** a much sought-after profile that allows a workmanlike application even in environments subject to high mechanical stresses.

PROEDGE R AC

POLISHED AND BRUSHED
STAINLESS STEEL AISI 304/1.4301-V2A



POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 81 lm - 8/10 mm

Article	LxH mm			
PEGRAC 15A	15 x 15	9,58	25,87	*
PEGRACS 15A	15 x 15	11,43	30,86	*
PEGRAC 20A	20 x 20	10,86	29,32	*
PEGRACS 20A	20 x 20	12,72	34,34	*

POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 40,5 lm - 10/10 mm

Article	LxH mm			
PEGRAC 25A	25 x 25			*
PEGRACS 25A	25 x 25			*
PEGRAC 30A	30 x 30			*
PEGRACS 30A	30 x 30			*

For items without adhesive write the item without the last A.
E.g.: PEGRAC 15

Suitable for use in contact with foodstuffs.


POLISHED AND BRUSHED STAINLESS STEEL WITH ADHESIVE
with protective film - bar length 2,7 lm - pack. 27 lm - 10/10 mm

Article	LxH mm			
PEGRAC 40A	40 x 40			*
PEGRACS 40A	40 x 40			*
PEGRAC 50A	50 x 50			*
PEGRACS 50A	50 x 50			*

PEGR... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A.
E.g.: PEGRAC 40

COLOURS

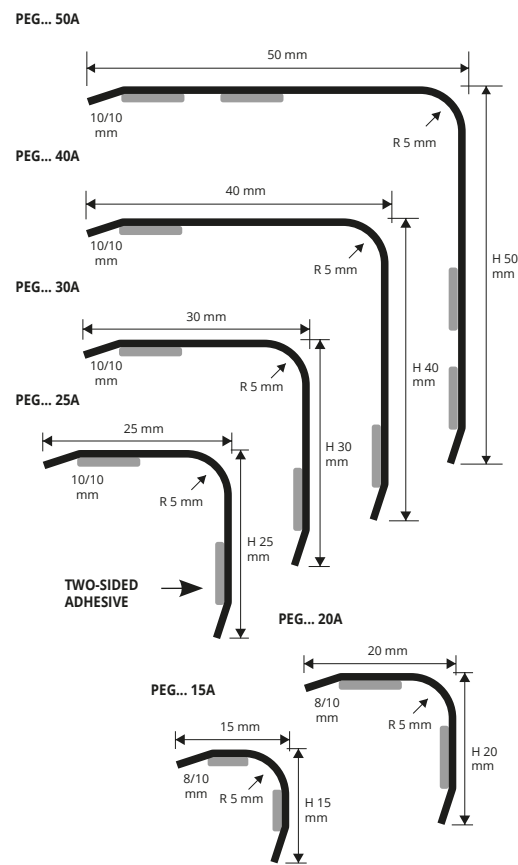

PROEDGE R OT is a corner bead profile in polished and chromed brass, with a radius of curvature of 5 mm, suitably shaped to protect the external corner of wall coverings. Its particular section, the availability in two finishes and different widths make **PROEDGE R OT** a much sought-after profile that allows an elegant workmanlike application.

PROEDGE R OT

POLISHED AND CHROMED BRASS



CHROMED BRASS WITH ADHESIVE
thermo packed - bar length 2,7 lm - pack. 54 lm

Article	LxH mm			
PEGROC 15A	15 x 15			*
PEGROC 20A	20 x 20			*
PEGROC 25A	25 x 25			*
PEGROC 30A	30 x 30			*



POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 27 lm - 10/10 mm

Article	LxH mm			
PEGROL 25A	25 x 25			*
PEGROL 30A	30 x 30			*



POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 54 lm - 8/10 mm

Article	LxH mm			
PEGROL 15A	15 x 15			*
PEGROL 20A	20 x 20			*



POLISHED BRASS WITH ADHESIVE
bar length 2,7 lm - pack. 27 lm - 12/10 mm

Article	LxH mm			
PEGROL 40A	40 x 40			*
PEGROL 50A	50 x 50			*




For items without adhesive, write the item without the last A.
E.g.: PEGROL 15

PEGR... 40A / 50A on demand with thickness 12/10.
Quantity, timing and prices to be agreed.

For items without adhesive, write the item without the last A.
E.g.: PEGROL 25

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

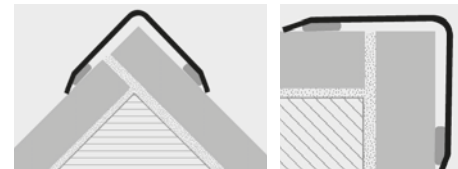

1. Choose "PROEDGE R OT" according to the desired finish and width.
2. Cut "PROEDGE R OT" to the desired length.
3. Remove carefully any remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is perfectly dry, remove the protective film, place correctly the profile and press it without hitting / apply the silicone on the surface where the profile will be laid (version without adhesive) and press it without hitting.

COLOURS



* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed