

PROTERMINAL are manufactured with the same forms and sections, as well as in the very resistant material, the stainless shiny steel 316/1.4401-V4A, suitable for outdoors and marine environment with much presence of saltiness and considerable atmospheric agents. They are used as protection for the external angles of tiles, in order to separate or to create the separating joints in the pavements, to terminate the finishing of wall coverings, for platforms, stair steps, bathtubs, etc. They guarantee the impeccable work, ensuring considerable aesthetic effect as well. They strengthen the tile edge and prevents from chipping and breakages. Required by new European regulations on safety and accident prevention in public and private places.

PROTERMINAL

POLISHED STAINLESS STEEL
AISI 316/1.4404-V4A





POLISHED STAINLESS ST. AISI 316L/1.4404-V4A with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm




Article	H mm
PTACM 06	6
PTACM 08	8
PTACM 10	10
PTACM 125	12,5

EXAMPLES OF LAYING

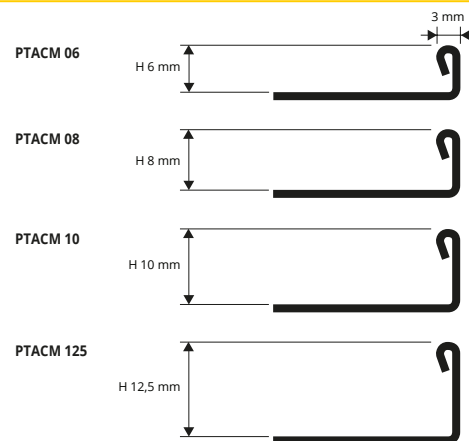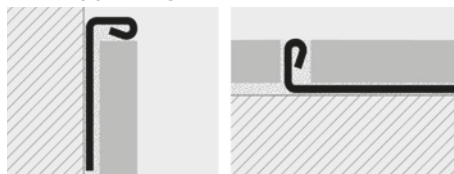

COLOURS



ACM - Polished stainless steel
AISI 316L

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles - tiles/parquet/marble/granite, etc.) of differing thickness. **PROTERMINAL** in brass is also used to protect steps and decking, as a floor edging profile, to cover skirting, decking and worktops and to frame doormats.

PROTERMINAL

POLISHED, NATURAL, ANTIQUE BRASS and BRUSHED



POLISHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs 54 lm


Article	H mm
PTOL 06	6
PTOL 08	8
PTOL 10	10
PTOL 125	12,5
PTOL 15	15
PTOL 20	20
PTOL 25	25

ANTIQUÉ BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm
PTOB 06	6
PTOB 08	8
PTOB 10	10
PTOB 125	12,5
PTOB 15	15
PTOB 20	20
PTOB 25	25

BRUSHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm
PTOS 06	6
PTOS 08	8
PTOS 10	10
PTOS 125	12,5
PTOS 15	15
PTOS 20	20
PTOS 25	25

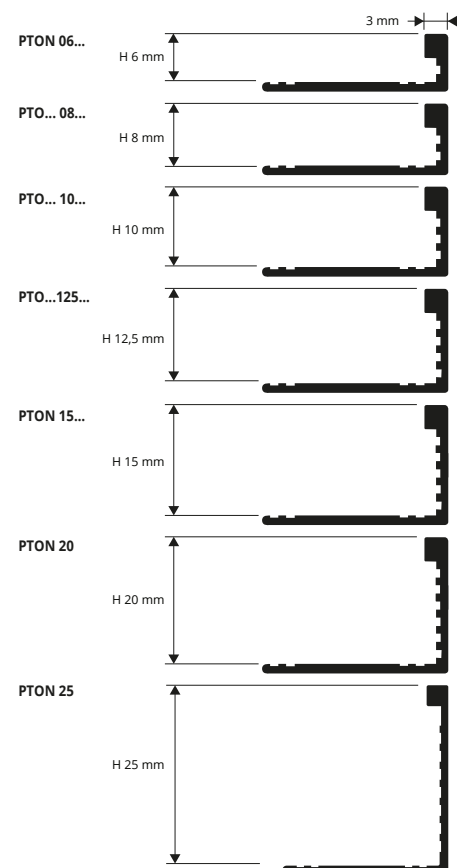

NATURAL BRASS thermo packed
bar length 2,70 lm pack. 20 Pcs 54 lm (H 6 mm - 40 Pcs 108 lm)

Article	H mm
PTON 06	6
PTON 08	8
PTON 10	10
PTON 125	12,5
PTON 15	15
PTON 20	20
PTON 25	25


NATURAL BRASS thermo packed
bar length 1 lm - pack. 40 Pcs - 40 lm

Article	H mm
PTON 061	6
PTON 081	8
PTON 101	10
PTON 1251	12,5

NATURAL BRASS thermo packed
bar length 0,90 lm - pack. 40 Pcs - 36 lm

Article	H mm
PTON 069	6
PTON 089	8
PTON 109	10
PTON 1259	12,5

COLOURS

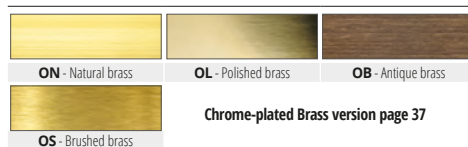

Chrome-plated Brass version page 37



Curve version is also available

1. Choose the "PROTERMINAL" with the same height as the thickness of the floor/wall covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

