



# PROFINAL

POLISHED, BRUSHED AND SANDED  
STAINLESS STEEL AISI 304/1.4301-V2A

**PROFINAL** is a profile in stainless steel AISI 304/1.4301-V2A polished, brushed and sanded. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

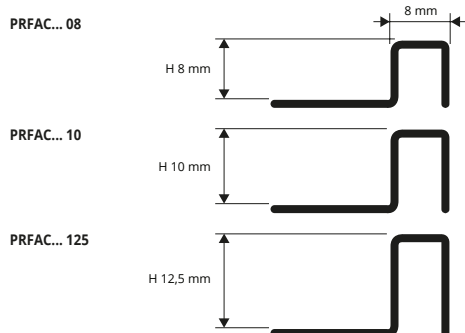

## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

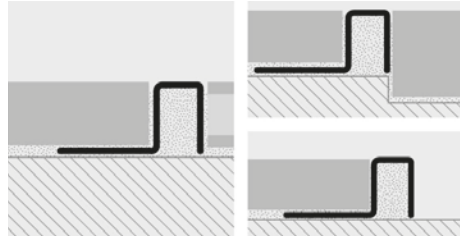

1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices.



**POLISHED STAINLESS ST. AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PRFAC 08	8		
PRFAC 10	10		
PRFAC 125	12,5		

## COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A ACS - Brushed stainless steel AISI 304/1.4301-V2A ACSB - Sanded stainless steel AISI 304/1.4301-V2A



**BRUSHED STAINLESS ST. AISI 304/1.4301-V2A with protective film bar**  
length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PRFACS 08	8		
PRFACS 10	10		
PRFACS 125	12,5		

**SANDED STAINLESS STEEL AISI 304/1.4301-V2A with protective film**  
bar length 2,7 lm - pack. 20 Pcs - 54 lm - 10/10 mm

Article	H mm		
PRFACSB 08	8		
PRFACSB 10	10		
PRFACSB 125	12,5		


ACSB - SPECIAL FINISH, REQUEST AVAILABILITY

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.


# PROFINAL

NATURAL, POLISHED,  
CHROMED AND ANTIQUE BRASS

**PROFINAL** is a profile in natural, polished, chromed and antique brass. It is available in three widths 8, 10 and 12.5 mm. Ideal for joining two types of floor on the same level (e.g. tile/tile or tile/wood), creating a decorative separating profile. It is also suitable as a step nosing or to create a decorative strip in the covering. It protects the edge and withstands high loads and frequent traffic.

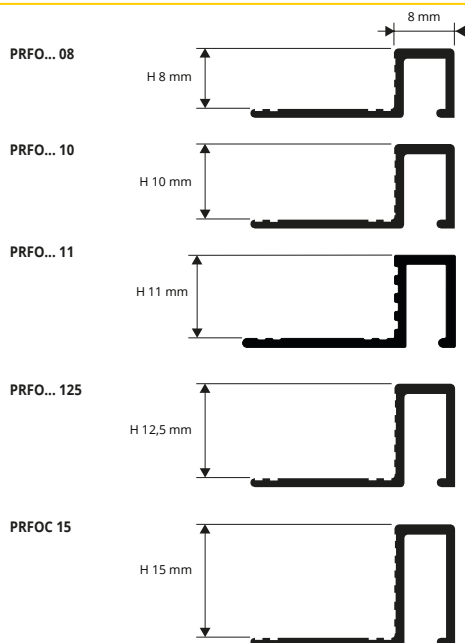


## EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

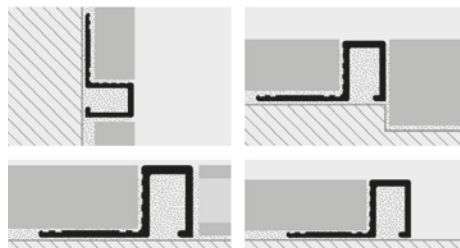

**NATURAL BRASS thermo packed 5 Pcs**  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRFON 08	8		
PRFON 10	10		
PRFON 125	12,5		

## COLOURS

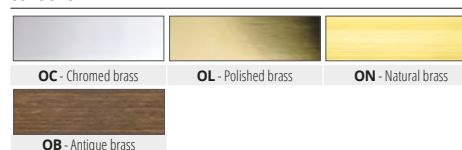

1. Choose the "PROFINAL" with the same height as the thickness of the covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. 5. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.



**POLISHED BRASS thermo packed**  
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRFOL 08	8		
PRFOL 10	10		
PRFOL 125	12,5		

## CHROMED BRASS thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm (H 15 mm - 40,5 lm)

Article	H mm		
PRFOC 08	8		
PRFOC 10	10		
PRFOC 11	11		
PRFOC 125	12,5		
PRFOC 15	15		

## ANTIQUÉ BRASS thermo packed

bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PRFOB 08	8		
PRFOB 10	10		
PRFOB 125	12,5		