


PROSOL 30-35-40


PUNCHED POLISHED BRASS
WITH PROTECTIVE FILM

PROSOL 30-35-40 in brass are punched joint - covers in polished brass available in various widths. They are used to join floors of the same or differing material and thickness. The rounded shape also allows the profile to be used to edge shallow floors max. 5 mm thick. **PROSOL** is normally used to cover flaws and defects created during laying of ceramic/wood/parquet floors by covering the joint/threshold. **PROSOL** is recommended for all sorts of public environments: hotels, offices, shops and private dwellings; it guarantees an impeccable and attractive finish.


PLSOL 30F/308F/309F/3010F/3016F/308FS/309FS/3010FS/3016FS





PLSOL 35F/359F/358FS/359FS/3510FS/3516FS



PLSOL 40F/409F/409FS/4016FS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

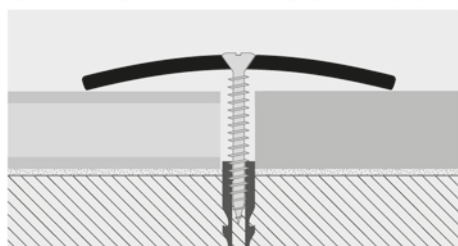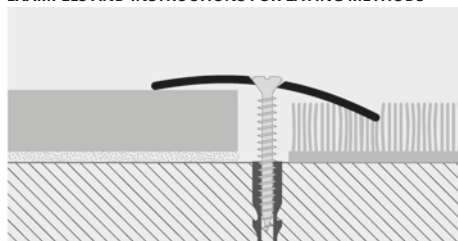

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference.
3. Insert the screw anchors into the drilled holes.
4. Fix the profile using flathead screws suitable for the relative slots in the profile.



POLISHED BRASS punched with protective film

bar length 2,7 lm - pack. 40 Pcs - 108 lm (L 35/40mm - 54 lm)

Article	Width-thick.	
PLSOL 30F	30 mm - 10/10	
PLSOL 35F	35 mm - 10/10	
PLSOL 40F	40 mm - 10/10	

POLISHED BRASS punched thermo packed

bar length 0,83 lm - pack. 20 Pcs



Article	Width-thick.	
PLSOL 308F	30 mm - 10/10	*

POLISHED BRASS punched thermo packed

bar length 0,93 lm - pack. 20 Pcs



Article	Width-thick.	
PLSOL 309F	30 mm - 10/10	*
PLSOL 359F	35 mm - 10/10	*
PLSOL 409F	40 mm - 10/10	*

POLISHED BRASS punched thermo packed

bar length 1,03 lm - pack. 20 Pcs



Article	Width-thick.	
PLSOL 3010F	30 mm - 10/10	*


POLISHED BRASS punched thermo packed

bar length 1,66 lm - pack. 20 Pcs




Article	Width-thick.	
PLSOL 3016F	30 mm - 10/10	*

COLOURS



OL - Polished brass

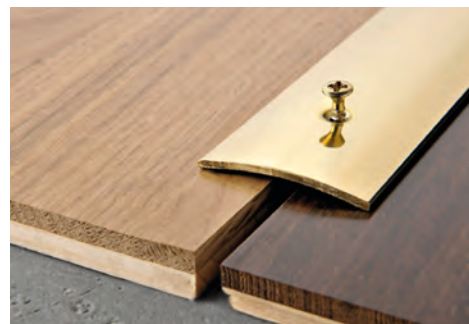

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 0,83 lm - pack. 20 Pcs



Article	Width-thick.	
PLSOL 308FS	30 mm - 10/10	*
PLSOL 358FS	35 mm - 10/10	*

On demand 0,73 or 0,63 lm bar length (quantity and prices to be agreed. Production delay 4/5 weeks).

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 0,93 lm - pack. 20 Pcs



Article	Width-thick.	
PLSOL 309FS	30 mm - 10/10	*
PLSOL 359FS	35 mm - 10/10	*
PLSOL 409FS	40 mm - 10/10	*

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 1,03 lm - pack. 20 Pcs



Article	Width-thick.	
PLSOL 3010FS	30 mm - 10/10	*
PLSOL 3510FS	35 mm - 10/10	*

POLISHED BRASS punched with screws and screw anchors thermo packed - bar length 1,66 lm - pack. 20 Pcs



Article	Width-thick.	
PLSOL 3016FS	30 mm - 10/10	*
PLSOL 3516FS	35 mm - 10/10	*
PLSOL 4016FS	40 mm - 10/10	*