

SOL 40P self-adhesive is a joint/threshold cover profile in aluminum covered with film in wooden finishes, which is highly resistant to pedestrian traffic, wear, UV rays and commonly used floor cleaning products. Easy to lay and to match with any wood finish; the surface has an open pore embossed finish. Recommended for covering joints between floors in laminate, wood, ceramic tiles, etc.



SILVER ANODIZED ALUMINUM with ADHESIVE
thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm
PNSPAA 409 PAS	40

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE
thermo packed - length 40 mm - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L mm
PNSP.. 40 PA	40

Available in the colours: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PNSP... 40 PA (chosen finish dark beech) PNSP04W 40 PA.

SILVER ANODIZED ALUMINUM with ADHESIVE
thermo packed - bar length 90 cm - pack. 20 Pcs

Article	L mm
PNSPAA 409 PAS	40

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE - thermo packed - bar length 0,90 lm - 20 Pcs

Article	L mm
PNSP.. 409 PAS	40

ALUMINUM COVERED 80 wooden finishes (49 on demand) with ADHESIVE - thermo packed - bar length 1 lm - 20 Pcs

Article	L mm
PNSPAA 4010 PAS	40

SILVER ANODIZED ALUMINUM with ADHESIVE
- thermo packed - bar length 1 lm - 20 Pcs

Article	L mm
PNSP.. 4010 PAS	40

SELF PACK


SELF PACK

SELF PACK


SELF PACK

SOL 40P SELF-ADHESIVE

ALUMINIUM COVERED WOODEN FINISHES



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

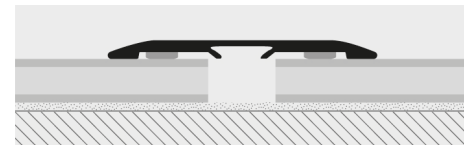

1. Choose the adhesive "SOL 40" in the required finish. 2. Cut the profile to the required length and clean, degrease and dry the surface, checking that the temperature for application is at least 15°. 3. Remove the protective paper from the adhesive and lay the profile correctly applying a uniform vertical pressure by hand without moving the profile and without using iron/steel hammers.

threshold - joint-cover profiles

PROCOVER WOOD is a joint-cover profile in aluminum covered with a very strong film available in wooden finishes. It is applied at the end of laying two adjoining floors with the same height, having left a 6 - 24 mm gap between the two floors set in a thin bed of adhesive. It protects the outside edges of the floor/covering. It is easy to lay and attractive. The design of the profile with lower vertical arrowhead part allows excellent anchorage with the silicone/adhesive.



ALUMINUM COVERED 80 wooden finishes (76 on demand)
thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	L x H mm
PCRA... 149	14 x 9
PCRA... 269	26 x 9



Available in the wooden finishes: 05W - 11W - 28W - 29W - 30W.
The code of the selected colour must be added to the article code.
Es.: PCRA... 149 (chosen finish light oak) PCRA04W 149.


COLOURS

05W - Light oak (strip)	11W - Decaple bleached	28W - Aspen oak	29W - White oak	30W - Grey oak
-------------------------	------------------------	-----------------	-----------------	----------------


On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks.
Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

PROCOVER WOOD

ALUMINIUM COVERED WITH PROTECTIVE FILM
IN WOODEN FINISHES

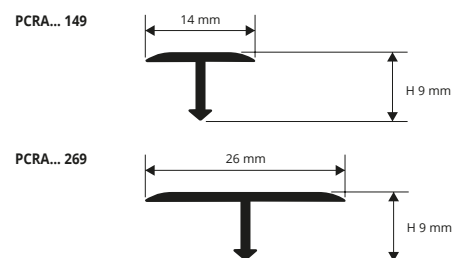

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

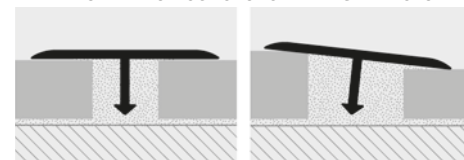

1. Choose the "PROCOVER" with the width suitable for the gap between the two floors to be joined, taking into consideration 2/3 mm - 2/32" - 1/8" side lap. 2. Fill the gap with single-pack silicone or with the adhesive used for laying the floor. 3. Bury the profile into the adhesive, making sure that both side laps of the profile rest on the coverings to be joined.

threshold - joint-cover profiles

PROCOVER INSERT

VINYL RESIN / BLACK RUBBER

Vinyl resin/rubber profile "U-form" for inserting PROCOVER with PINBFT 45 or PINBFT 40 Proinsert System base.

VINYL RESIN / RUBBER
length 2,7 lm and/or in rolls

Article
PCPCR

PROINSERT BASE 45 and BASE 40 - ALUM. PUNCHED/PERFORED
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PINBFT 45	45
PINBFT 40	40



PCRA... 149/1499/209/269
+ INS
+ BASE 45/40

PINBFT 45

PINBFT 40

45 mm

40 mm