


PERIMETER SPACER

Perimeter spacer of stainless steel AISI 316L / 1.4404 - V4A for laying outdoor floating floors. The profile makes a 5 mm wide perimeter gap, for the outflow of rainwater; moreover, thanks to the rounded fin with which is provided, it does not damage the waterproofing sheath. The slit width of 0.5 cm and the length of 18 cm ensure a perfect anchorage of the spacer with the heads of the Prosupport System.



PERIMETER SPACER PROSUPPORT SYSTEM
Stainless steel AISI 316L / 1.4404 - V4A - pack. 40 Pcs

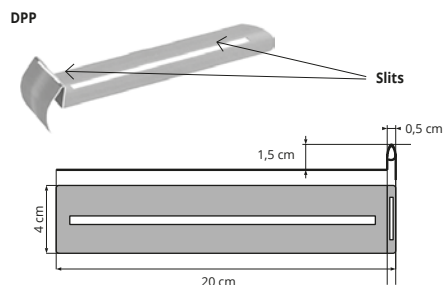

| Article | | |
|---------|--|--|
| DPP | | |

PROSUPPORT TUBE SYSTEM OPTIONAL

ADJUSTING KEY (only for head PSTH 04)

| Article | | |
|---------|--|--|
| PSTAK | | |



ADJUSTABLE SPACER TABS 4 mm
polypropylene - Pack 80 pcs

| Article | L x H mm | Pcs/pack | |
|---------|----------|----------|--|
| PSTJ | 80 x 20 | 80 | |

Spacer tabs 80 mm long to be fixed on the self-levelling head, which allow the fixing of wooden, WPC and aluminium joists of max width 80 mm.



Items not for sale individually. Minimum order one pack.

FIXING CLIP FOR TILES - WIND-PROOF
Pack 40 pairs

| Article | L x H mm | pairs/pack | |
|---------|----------|------------|--|
| PSTWP | 20 x 60 | 40 | |

Fastening clip to fix the tiles and block the floor in case of strong wind. The clips must be inserted inside the cross joint or along the perimeter of the floor.



Items not for sale individually. Minimum order one pack.

RUBBER DISK for laying on bituminous roof membrane
H 2 mm - Pack. 100 Pcs (box 100 pcs)

| Article | H (mm) | |
|---------|--------|--|
| LVGG 02 | 2 | |

Rubber disc, 2 mm thick, to be applied under the support (SQG 15) to protect the bituminous membrane.



SPACER FOR APPLICATION ON GRAVEL
Pack. 100 Pcs (box 100 pcs)

| Article | | |
|---------|--|--|
| DILV | | |

Transparent plastic 4 mm cross spacer for laying on gravel or irregular surfaces.

