



TROWEL in steel foil 3x3, support in polished aluminium with electro welded fixing. Rubber grip fixed with an anti-rotation system. Particularly suitable for the laying of the waterproofing system PROFOIL.


TROWEL

STEEL

TROWEL STEINLESS STEEL

Box 6 Pcs

| Article | Tooth | Dimensions mm | Pcs/Box | | |
|---------|-------|---------------|---------|--|--|
| PFTT33 | 3X3 | 280X120 | 6 | | |

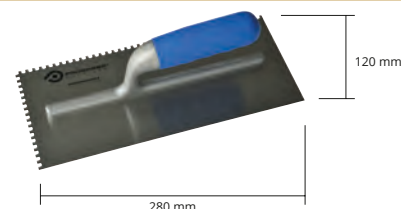

TROWEL in steel foil 5x7, support in polished aluminium with electro welded fixing. Rubber grip fixed with an anti-rotation system. Particularly suitable for the laying of the waterproofing and uncoupling systems PRODESO® and PRODESO® HEAT & PRODESO® HEAT GRIP.

TROWEL

STEEL

TROWEL STEINLESS STEEL

Box 6 Pcs

| Article | Tooth | Dimensions mm | Pcs/Box | | |
|---------|-------|---------------|---------|--|--|
| PFTT57 | 5X7 | 280X121 | 6 | | |



TROWEL in steel foil 10x10, support in polished aluminium with electro welded fixing. Rubber grip fixed with an anti-rotation system. Particularly suitable for the laying of tiles above the waterproofing and uncoupling systems PRODESO® and PRODESO® HEAT & PRODESO® HEAT GRIP.


TROWEL

STEEL

TROWEL STEINLESS STEEL

Box 6 Pcs

| Article | Tooth | Dimensions mm | Pcs/Box | | |
|----------|-------|---------------|---------|--|--|
| PFTT1010 | 10X10 | 280X122 | 6 | | |

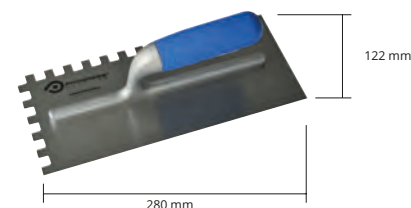


TROWEL in PVC size 10x10 cm, resistant to solvents, with a triangular teeth of interaxle spacing of 5 mm, 4 mm and 3 mm. To be used for the application of adhesives PROBAND FIX.

TROWEL

PVC

TROWEL

| Article | Dimensions mm | |
|----------|---------------|--|
| PRSPD 10 | 100x100 | |



ROLLER in nylon, 40 cm long, fixed to a varnished metal or stainless steel 304 frame, suitable for pressing the PRODESO®, PRODESO® HEAT & PRODESO® HEAT GRIP and PROFOIL. The roller is equipped with an extendable grip, length-adjustable and with an L base that allows to load 1 bag of adhesive to obtain the correct and homogenous pressing of the membranes. A tripod allows to keep the roll in the right position while loading the bag.

ROLLER

VARNISHED STEEL OR STAINLESS STEEL

ROLLER IN STAINLESS STEEL

L 40 cm

| Article | L mm | Finish | |
|---------|------|-----------|--|
| PSM | 400 | varnished | |
| PSMAC | 400 | steel | |

