

PROTERMINAL is a L-shaped profile in chromed and antique brass that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and elegance make PROJOLLY a much sought-after profile that allows a workmanlike application.

PROTERMINAL

CHROMED BRASS, BRUSHED BRASS AND ANTIQUE BRASS



BRUSHED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm
PTOS 06	6
PTOS 08	8
PTOS 10	10
PTOS 125	12,5

ANTIQU BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm


Article	H mm
PTOB 06	6
PTOB 08	8
PTOB 10	10
PTOB 125	12,5

INSTRUCTIONS FOR LAYING METHODS

1. Choose "PROTERMINAL" according to the tile thickness. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

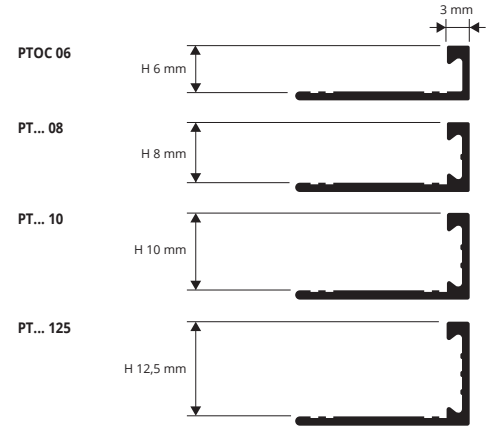

EXAMPLES OF LAYING

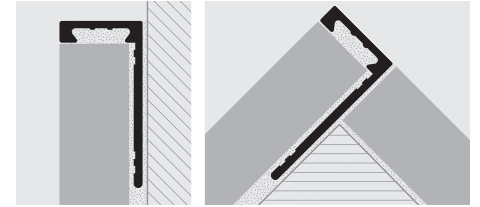

CHROMED BRASS thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	H mm
PTOC 06	6
PTOC 08	8
PTOC 10	10
PTOC 125	12,5

COLOURS



PROTERMINAL is a L-shaped profile in natural and anodized aluminium that can be applied on external corners of coverings. It can be used to close the perimeter of coverings, like a connection profile between step tread and riser of stairs coated with ceramic or natural stone tiles and also as separation profile for floor and wall coverings. Its particular section and the availability in six different finishes make **PROTERMINAL** a much sought-after profile that allows a workmanlike application.

PROTERMINAL

NATURAL AND ANODIZED ALUMINIUM



ANODIZED ALUMINIUM (gold - silver) thermo packed
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTAA 03	3
PTAA 045	4,5
PTAA 06	6
PTAA 08	8
PTAA 10	10
PTAA 11	11
PTAA 125	12,5
PTAA 15	15
PTAA 20	20
PTAO 03	3
PTAO 045	4,5
PTAO 06	6
PTAO 08	8
PTAO 10	10
PTAO 11	11
PTAO 125	12,5

COLOURS




ANODIZED ALUMINIUM (black-titanium-copper-bronze- antique bronze-grey gun) thermo packed - bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTNE 06	6
PTNE 08	8
PTNE 10	10
PTNE 11	11
PTNE 125	12,5
PTAT 08	8
PTAT 10	10
PTAT 11	11
PTAT 125	12,5
PTAR 08	8
PTAR 10	10
PTAR 125	12,5
PTAB 08	8
PTAB 10	10
PTAB 125	12,5
PTBRA 10	10
PTBRA 125	12,5
PTAG 06	6
PTAG 08	8
PTAG 10	10
PTAG 11	11
PTAG 125	12,5


NATURAL ALUMINIUM
bar length 2,7 lm - pack. 40 Pcs - 108 lm

Article	H mm
PTAN 03	3
PTAN 045	4,5

On demand may be realised in other finishes of the colour chart. Contact our customer service for minimal quantity, timing and price.

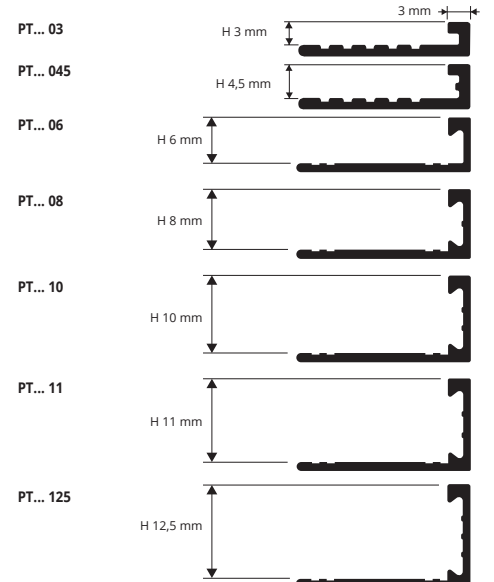

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

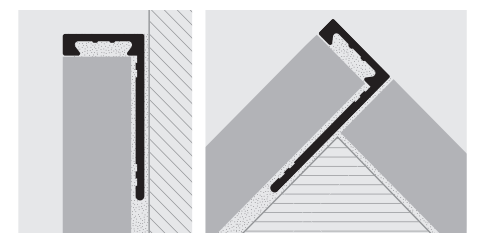

1. Choose "PROTERMINAL" according to the tile thickness and desired finish. 2. Cut "PROTERMINAL" to the desired length and apply the adhesive on the support where the profile will be laid. 3. Press the anchoring flange of "PROTERMINAL" into the adhesive. 4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile. 5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

= News 2024

= Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed