




PROTERMINAL are manufactured with the same forms and sections, as well as in the very resistant material, the stainless shiny steel 316/1.4401-V4A, suitable for outdoors and marine environment with much presence of saltiness and considerable atmospheric agents. They are used as protection for the external angles of tiles, in order to separate or to create the separating joints in the pavements, to terminate the finishing of wall coverings, for platforms, stair steps, bathtubs, etc. They guarantee the impeccable work, ensuring considerable aesthetic effect as well. They strengthen the tile edge and prevents from chipping and breakages. Required by new European regulations on safety and accident prevention in public and private places.




POLISHED STAINLESS ST. AISI 316L/1.4404-V4A
with protective film
bar length 2,7 lm - pack. 40 Pcs - 108 lm - 10/10 mm

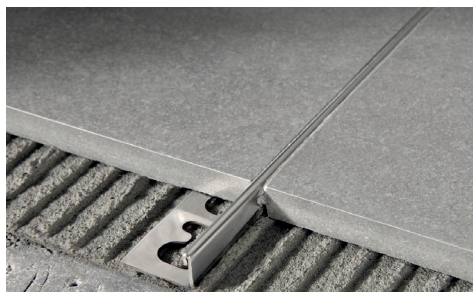

Article	H mm		
PTACM 06	6		
PTACM 08	8		
PTACM 10	10		
PTACM 125	12,5		

EXAMPLES OF LAYING

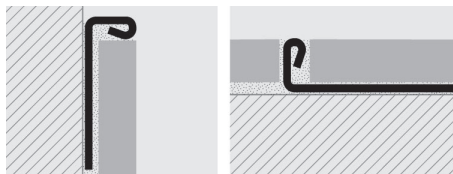

COLOURS




ACM - Polished stainless steel
AISI 316L

SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS.

PROTERMINAL

POLISHED STAINLESS STEEL
AISI 316/1.4404-V4A

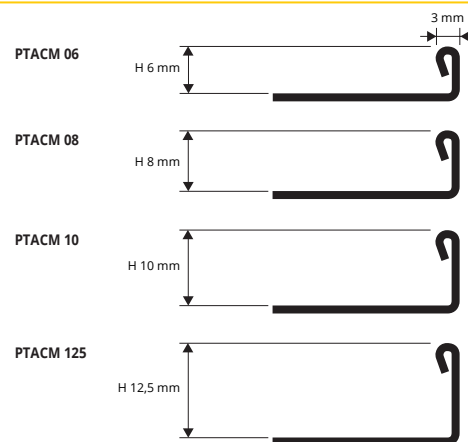

PROTERMINAL is a professional edging profile used mainly to join similar or different floor materials (e.g. tiles/tiles - tiles/parquet/marble/granite, etc.) of differing thickness.

PROTERMINAL in brass is also used to protect steps and decking, as a floor edging profile, to cover skirting, decking and worktops and to frame doormats.

PROTERMINAL

POLISHED, NATURAL, ANTIQUE BRASS and
BRUSHED



POLISHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs 54 lm

Article	H mm		
PTOL 06	6		
PTOL 08	8		
PTOL 10	10		
PTOL 125	12,5		
PTOL 15	15		*
PTOL 20	20		*
PTOL 25	25		*


ANTIQUÉ BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PTOB 06	6		
PTOB 08	8		
PTOB 10	10		
PTOB 125	12,5		
PTOB 15	15		*
PTOB 20	20		*
PTOB 25	25		*

BRUSHED BRASS thermo packed
bar length 2,70 lm - pack. 20 Pcs - 54 lm

Article	H mm		
PTOS 06	6		*
PTOS 08	8		*
PTOS 10	10		*
PTOS 125	12,5		*
PTOS 15	15		*
PTOS 20	20		*
PTOS 25	25		*

COLOURS

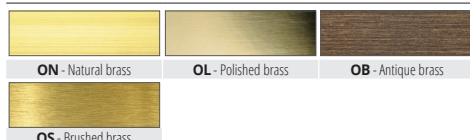

NATURAL BRASS thermo packed
bar length 2,70 lm pack. 20 Pcs 54 lm (H 6 mm - 40 Pcs 108 lm)


Article	H mm		
PTON 06	6		
PTON 08	8		
PTON 10	10		
PTON 125	12,5		
PTON 15	15		
PTON 20	20		
PTON 25	25		

NATURAL BRASS thermo packed
bar length 1 lm - pack. 40 Pcs - 40 lm


Article	H mm		
PTON 061	6		*
PTON 081	8		*
PTON 101	10		*
PTON 1251	12,5		*

NATURAL BRASS thermo packed
bar length 0,90 lm - pack. 40 Pcs - 36 lm

Article	H mm		
PTON 069	6		*
PTON 089	8		*
PTON 109	10		*
PTON 1259	12,5		*



Curve version is also available

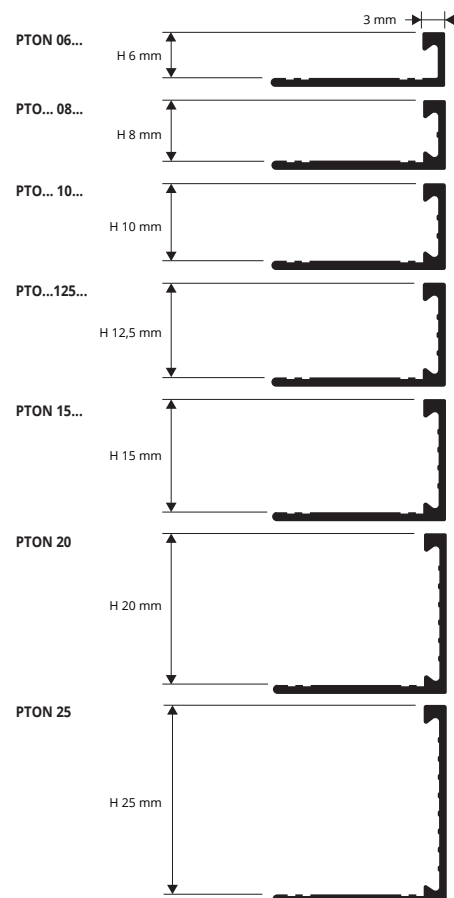

1. Choose the "PROTERMINAL" with the same height as the thickness of the floor/wall covering. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is "flush" with the tile. Use the adhesive to seal any empty interstices. Oxidation marks may be easily removed by polishing the profiles with specific products to be found on sale such as Sidol, Smac and similar.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

