



PROLEVALL 358 are transition profiles in polished extruded brass, available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 7 and 9 mm. **PROLEVALL 358** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 358

POLISHED BRASS
WITH SELF-ADHESIVE AND PUNCHED



POLISHED BRASS thermo packed - bar length 2,7 lm
pack. 20 Pcs - 54 lm (PLVOL 358F: 15 Pcs - 40,5 lm)

Article	L x H mm
PLVOL 358A	35 X 8
PLVOL 358F	35 X 8

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item


POLISHED BRASS thermo packed
bar length 0,90 lm - pack. 20 Pc



Article	L x H mm
PLVOL 3589AS	35 X 8
PLVOL 3589FS	35 X 8


"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item

COLOURS




OL - Polished brass

PLVOL 358A/PLVOL 3589AS
PLVOL 358F/PLVOL 3589FS



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

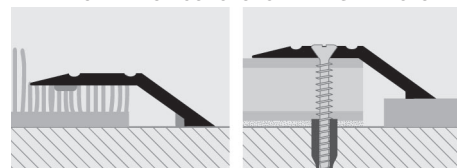

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

PROLEVALL 4413 are transition profiles in polished extruded brass and anodized aluminium available in the self-adhesive or punched versions. They are used to give a clean-cut, elegant finish when joining and compensating differences in level of floors that are already laid and in differing or same materials e.g. ceramic tiles-wood-parquet-marble, etc. They join and compensate a thickness between 13 and 15 mm. **PROLEVALL 4413** ensures a perfect finish with little height, covering any flaws created during laying, while the contoured edges guarantee perfect adherence to the floor.

PROLEVALL 4413

POLISHED BRASS AND
ANODIZED SILVER ALUMINIUM
WITH SELF-ADHESIVE AND PUNCHED



POLISHED BRASS thermo packed
bar length 2,7 lm - pack. 10 Pcs - 27 lm

Article	L x H mm
PLVOL 4413A	44 X 13
PLVOL 4413F	44 X 13

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item

POLISHED BRASS thermo packed
bar length 0,90 lm - pack. 20 Pc



Article	L x H mm
PLVOL 44139AS	44 X 13
PLVOL 44139FS	44 X 13

"AS" at the end of the product code = Item with adhesive
"FS" at the end of the product code = Punched Item


ANODIZED SILVER and GOLD ALUMINIUM thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm

Article	L x H mm
PLV... 4413A	44 X 13
PLV... 4413F	44 X 13

"A" at the end of the product code = Item with adhesive
"F" at the end of the product code = Punched Item


Available in the colours: AA - AO (OL, AT, CH e SB available on demand with a minimum quantity order of 100 pcs). The code of the selected colour must be added to the article code. E.g.: PLV... 4413F (chosen colour anodized gold alum.) PLVAO 4413F.

COLOURS



AA - Anodized silver alum. AO - Anodized gold alum.


AVAILABLE MINIMUM QUANTITY 100 PCS by color and height




OL - Polished brass AT - Anodized titanium alum. CH - Anod. champagne alum. SB - Anodized sand alum.

(Price to be agreed. Production delay 4/5 weeks)


PLVOL 4413A / PLVOL 44139AS
PLVOL 4413F / PLVOL 44139FS

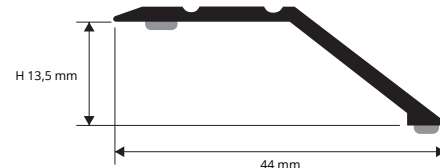

PLV... 4413A / PLV... 4413F

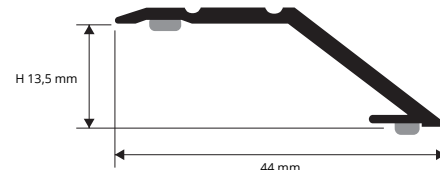

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

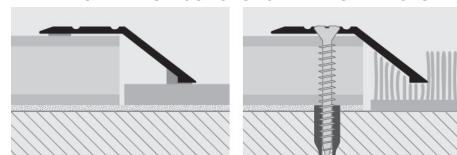

Adhesive version

1. Choose the suitable profile and cut it to the necessary length.
2. Degrease, wash and clean the solid surface thoroughly.
3. Remove the protective paper from the adhesive. 4. Lay the profile by applying pressure evenly over the whole surface without using a hammer.

Punched version

1. Choose the suitable profile and cut it to the necessary length.
2. Mark the position of the holes using the existing holes in the profile as reference. 3. Insert the screw anchors into the drilled holes. 4. Fix the profile using flathead screws suitable for the relative slots in the profile.

transition profiles

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed