


ZERO CURVE

TOP IN WOODEN FINISHES
AND ANODIZED FINISHES
+ PIN INSERT + ALUMINIUM BASE

The **ZERO CURVE** range comprises a large assortment of terminal transition profiles for joining floors at different levels and with different thickness varying from 7 to 20 mm. wooden finishes are available, plus anodized finishes. There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

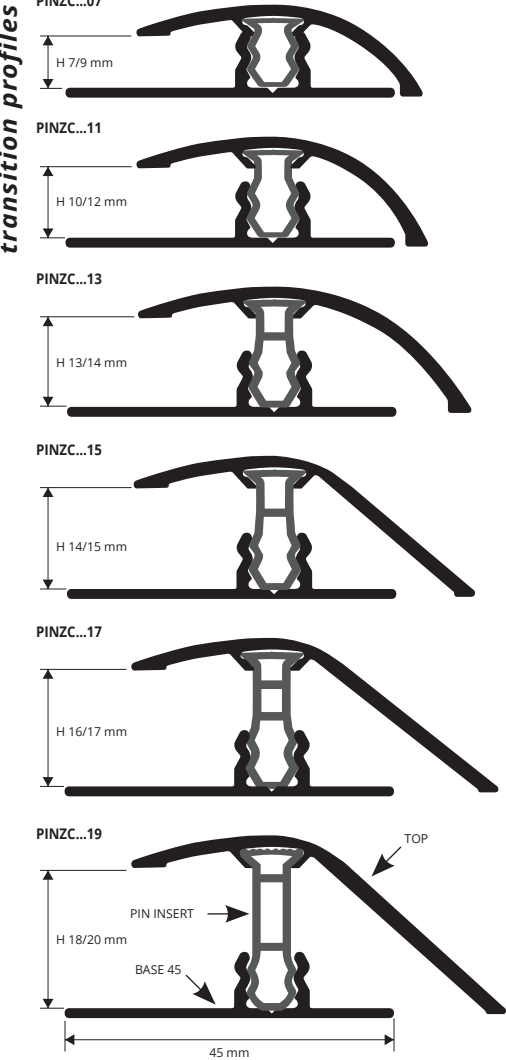

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORED
(6 anod. alum. finishes of which 3 on demand) thermo packed
bar length 2,7 lm - pack. 20 Pcs - 54 lm - (PIN 15, 17 - 40,5 lm) (PIN 19 - 27 lm)

Article	H mm		
PINZC... 07 (top PINZ... 07 + PIN 07)	7 / 9		
PINZC... 11 (top PINZ... 07 + PIN 11)	10 / 12		
PINZC... 13 (top PINZ... 09 + PIN 13)	13 / 14		
PINZC... 15 (top PINZ... 13 + PIN 15)	14 / 15		
PINZC... 17 (top PINZ... 13 + PIN 17)	16 / 17		
PINZC... 19 (top PINZ... 15 + PIN 19)	18 / 20		

COMPLETE

ALUM. TOP + PIN INSERT + ALUM. BASE 45 PUNCHED/PERFORATED
(6 anod. alum. finishes of which 3 on demand) thermo packed
L. 0,90 lm - 15 Pcs (PIN 13, 15, 17, 19 - 10 Pcs)



Article	H mm		
PINZC... 07S (top PINZ... 07 + PIN 07)	7 / 9		
PINZC... 11S (top PINZ... 07 + PIN 11)	10 / 12		
PINZC... 13S (top PINZ... 09 + PIN 13)	13 / 14		
PINZC... 15S (top PINZ... 13 + PIN 15)	14 / 15		
PINZC... 17S (top PINZ... 13 + PIN 17)	16 / 17		
PINZC... 19S (top PINZ... 15 + PIN 19)	18 / 20		

Available in the finishes: AO - AA - AB (AT, CH and SB available on demand with a minimum quantity order of 200 pcs) and in the wooden finishes: 04W - 05W - 07W - 09W - 13W - 18W - 21W - 25W - 29W - 30W - 31W - 32W - 33W - 34W - 35W - 36W - 37W - 38W - 39W - 41W - 42W - 44W - 45W - 46W - 48W - 49W - 53W - 54W - 55W - 65W - 73W - 75W.
The code of the selected colour must be added to the article code. E.g.: PINZC... 07S (chosen finish anod. gold) PINZCAO 07S.

ANODIZED COLOURS

AO - Anod. gold aluminium	AA - Anod. silver aluminium	AB - Anod. bronze aluminium

* ANODIZED COLOURS ON DEMAND

AT - Anod. titanium aluminium	CH - Anod. champagne alum.	SB - Anod. sand aluminium

WOODEN COLOURS

04W - Dark beech	05W - Light oak (strip)	07W - Light cherry (strip)	09W - Red walnut	13W - Indonesian teak	18W - Light zerbano	21W - Oak powder	25W - Bleached fir	29W - White oak	30W - Grey oak	31W - Victoria oak
32W - Pink oak	33W - Sawed oak	34W - Havana oak	35W - Edinburgh oak	36W - American oak	37W - Carvi oak	38W - Queens oak	39W - Grey elm	41W - Ice oak	42W - Grace oak	44W - Honey oak
45W - Marocco oak	46W - Black decap	48W - Cork oak	49W - Sand oak	53W	54W	55W	65W - Tripoli	73W - Bangkok	75W - Liotard	

* WOODEN COLOURS ON DEMAND

06W	08W	10W	11W	28W	40W	43W	47W	50W	51W	52W	56W	57W	58W	59W	60W	61W	62W	63W	64W	66W	67W	68W	69W	70W	71W	72W	74W	76W	77W
78W	79W	80W	81W	82W	83W	84W	85W	86W	87W	88W	89W	90W	93W	94W	95W	97W													

On request it is possible to realize other finishes of the color range: minimum order 200 pcs. Production delay 4/5 weeks. Price to be agreed. For sample finishes, contact the sales office for minimum quantities, timing and costs.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Fix and/or glue the base to the floor. 2. Lay the floor leaving from 3 to 10 mm between the floor and the insert. 3. Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4. With the aid of a board, hammer the TOP to the desired fitting level.