

**TROWEL** in steel foil, support in polished aluminium with electro welded fixing. Rubber grip fixed with an anti-rotation system.

## TROWEL

STEEL

### TROWEL STEINLESS STEEL

Box 6 Pcs

Article	Tooth	Dimensions mm	Pcs/Box
PFTT33	3X3	280X120	6

### TROWEL STEINLESS STEEL


Box 6 Pcs

Article	Tooth	Dimensions mm	Pcs/Box
PFTT57	5X7	280X121	6

### TROWEL STEINLESS STEEL

Box 6 Pcs

Article	Tooth	Dimensions mm	Pcs/Box
PFTT1010	10X10	280X122	6

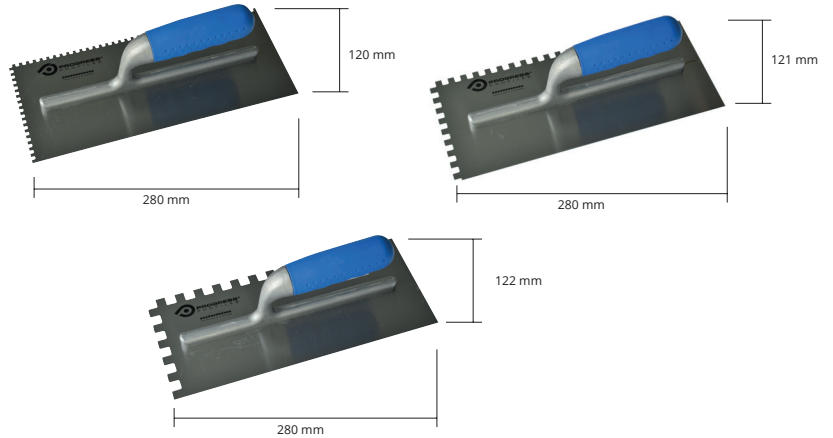


**TROWEL in PVC** size 10x10 cm, resistant to solvents, with a triangular teeth of interaxle spacing of 5 mm, 4 mm and 3 mm. To be used for the application of adhesives PROBAND FIX.

## TROWEL

PVC

### TROWEL

Article	Dimensions mm
PRSPD 10	100x100




**TROWEL PROBAND KOLL** - Stainless steel AISI 304 / 14301 - V2A trowel for the application of PROBAND KOLL family adhesives along the joints between adjacent rolls of membranes of the PRODESO® family for the sealing of PROBAND 150/250.

## TROWEL PROBAND KOLL

STEEL

### TROWEL PROBAND KOLL

Article	Tooth	Dimensions mm	Pcs/Box
PFTTKL	2X10	130X205	1



**ROLLER** in nylon, 40 cm long, fixed to a varnished metal or stainless steel 304 frame, suitable for pressing the PRODESO®, PRODESO® HEAT & PRODESO® HEAT GRIP and PROFOIL. The roller is equipped with an extendable grip, length-adjustable and with an L base that allows to load 1 bag of adhesive to obtain the correct and homogenous pressing of the membranes. A tripod allows to keep the roll in the right position while loading the bag.

## ROLLER

VARNISHED STEEL OR STAINLESS STEEL

### ROLLER IN STAINLESS STEEL

L 40 cm

Article	L mm	Finish
PSM	400	varnished
PSMAC	400	steel

