
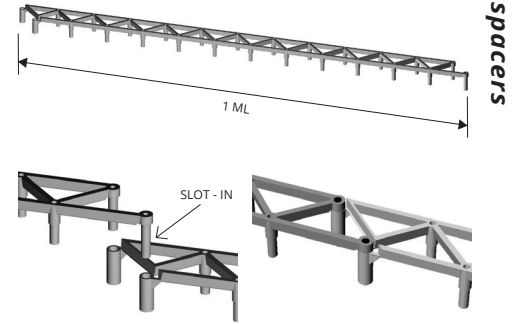
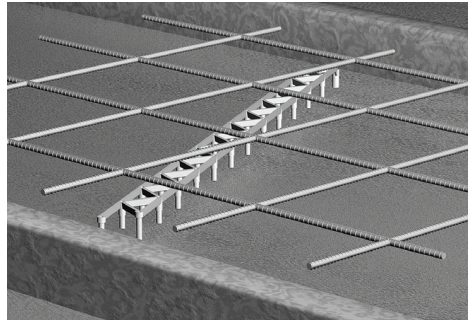


The linear spacer **RAPY 100** is strong and resistant, capable of bearing heavy loads thanks to its shape and size. The lateral and horizontal holes allow perfect penetration of the concrete. Upside down it can be used on insulating panels for floors. Spacers may be joined together longitudinally with a simple slot-in system. Ideal for precasting and civil industry, it ensures stability and invisible finish. On demand available in 50 cm cut.

# RAPY 100 FOR HEAVY MESH

GREY HD POLYPROPYLENE

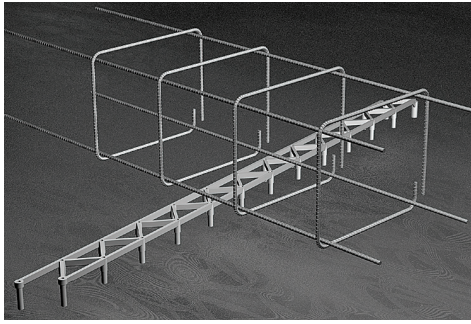

GREY HD POLYPROPYLENE  
length 1 lm - pack. 80 lm

Article	H mm
PLF 20	20
PLF 25	25
PLF 30	30

Maximum weight:  
3000 kg a piece (bar length: 1 lm) equally distributed.

GREY HD POLYPROPYLENE  
length 1 lm - pack. 60 lm

Article	H mm
PLF 35	35
PLF 40	40
PLF 45	45
PLF 50	50
PLF 55	55
PLF 60	60



Strong and very resistant linear spacer, to be joined lengthwise and have several lengths. The new shape allows to combine high technical performances to a costs optimization.

# RAPY 100 ECO

GREY HD POLYPROPYLENE

RAPY 100 ECO  
length 1 lm - pack. 64 lm

Article	H mm
PLFE 20	20
PLFE 25	25
PLFE 30	30
PLFE 35	35
PLFE 40	40

ARTICLES NOT FOR SALE SINGLY

RAPY 100 ECO  
length 1 lm - pack. 64 lm

Article	H mm
PLFE 45	45
PLFE 50	50
PLFE 55	55
PLFE 60	60

ARTICLES NOT FOR SALE SINGLY



The **RAPY 200** spacer is sturdy, resistant and easy to place. Ideal for reinforced horizontal, vertical and sloped structures. The side and horizontal holes allow it to perfectly penetrate into the concrete. When flipped over, it can be used for insulation panels, floors and precast structures. On demand available at 1 metre.


# RAPY 200

GREY HD POLYPROPYLENE

GREY HD POLYPROPYLENE  
length 2 lm - pack. 96 lm

Article	H mm
PLF 20R	20
PLF 25R	25
PLF 30R	30
PLF 40R	40

Maximum weight: 3000 kg a piece (bar length: 2 lm) equally distributed.  
The spacer is made up of two 1 lm pieces joined together.

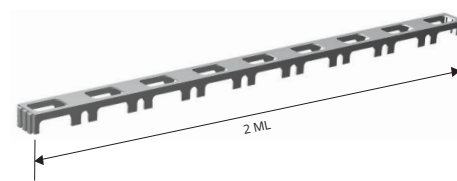

Spacer for horizontal use for heavy reinforcement and meshes; it withstands heavy incidental weights and loads with great stability.


# MULTIPIEDE

GREY HD POLYETHYLENE

GREY HD POLYPROPYLENE  
bar length 50 cm

Article	H mm
DMP 20 (100 Pcs)	20
DMP 25 (100 Pcs)	25
DMP 30 (75 Pcs)	30

Maximum weight:  
2.500 kg a piece (bar length: 50 cm) equally distributed.

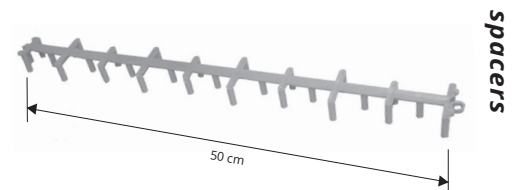

\* = Production on demand with minimum quantity of 10000 pcs. Production delay 4/5 weeks. Price to be agreed.