



**PROFLEX ACC PR** is a new perimeter joint made of AISI 304/1.4301-V2A stainless steel, with an interchangeable vinyl resin/rubber insert. **PROFLEX ACC PR** is applied on fixed parts, such as doors, windows and frames, and also on ceramic tiling, plaster and vertical walls. The visible part of the perimeter joint is the same as **PROFLEX ACC**, with an exposed steel flange. **PROFLEX ACC PR** joints prevent sound from propagating through the wall lining and reduce the transmission of noise caused by footfalls and vibrations. Available with grey (G), black (N), beige (B) or ivory (A) inserts and in various heights H 8-10-12,5-15-20 mm. Lay the joints according with the standards in force.

## PROFLEX ACC PR

STAINLESS STEEL AISI 304/1.4301-V2A  
+ VINYL RESIN / RUBBER INSERT




**POLISHED STAINLESS STEEL AISI 304/1.4301-V2A  
+ VINYL RESIN / RUBBER INSERT**

bar length 2,5 lm - pack 20 PZ - 50 lm

Article	H mm
PFXACPR 08...	8
PFXACPR 10...	10
PFXACPR 125...	12,5
PFXACPR 15...	15
PFXACPR 20...	20

### COLOURS



AC - Polished stainless steel AISI 304/1.4301-V2A

### LAYING INSTRUCTIONS

1. Choose the **PROFLEX ACC PR** with suitable height for the thickness of the floor. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is flush with the tile. 5. Fill the profile area of contact with adhesive to prevent the accumulation of water in any voids.



**VINYL RESIN / RUBBER INTERCHANGEABLE INSERT**

Article	H mm
INPFXACR 820	8-10-12,5-15-20

Insert available in the colours: G - N (Beige and Ivory available on demand with a minimum quantity order of 500 lm). The code of the selected finish must be added to the article code. E.g.: PFXACPR 08... (chosen insert colour grey) PFXACPR 08G.

### COLOURS



N - Black (E85)

G - Grey (E83)


**ON DEMAND MINIMUM QUANTITY 500 LM per colour and height**



B - Beige (E84)

A - Ivory (E81)

(price and delivery time to be agreed)

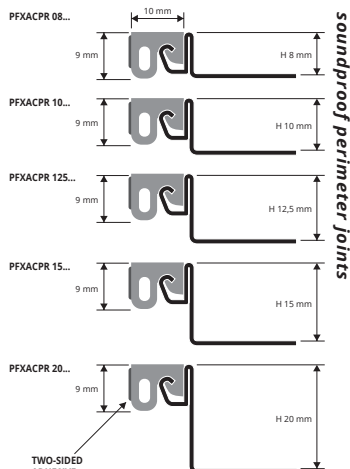

soundproof perimeter joints

### EXAMPLES OF LAYING



SUITABLE FOR USE IN CONTACT WITH FOODSTUFFS

**PROFLEX 5 PR** is a perimeter joint made of coextruded vinyl resin that can be used to connect the floor to the wall lining or the wall lining to doors and windows and/or to any other kind of lining. The 5 mm elastic part (exposed) allows the floor/lining to expand as necessary. **PROFLEX 5 PR** prevents and dampens the propagation of sound waves and the forming of sound bridges. Available in dark grey, light grey, Beige and ivory, in various heights H 4,5-6-8-10-12,5 mm. Lay the joints according with the standards in force.

## PROFLEX 5 PR

NON-TOXIC IMPACT-RESISTANT CO-EXTRUDED VINYL RESIN (PVC)



**VINYL RESIN** - bar length 2,5 lm - pack 40 Pcs - 100 lm

Article	H mm
PFX5PR 045...	4,5
PFX5PR 06...	6
PFX5PR 08...	8
PFX5PR 10...	10
PFX5PR 125...	12,5
PFX5PR 15...	15


### COLOURS



GS - Dark grey for rigid and flexible part

GL - Light grey for rigid and flexible part

### EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose the **PROFLEX PR** with suitable height for the thickness of the floor. 2. Apply the adhesive onto the area of application of the profile. 3. Lay and align the profile, cut to the necessary length, pressing the perforated flange into the adhesive. 4. Lay the tiles, aligning them so that the top edge of the profile is flush with the tile. 5. Fill the profile area of contact with adhesive to prevent the accumulation of water in any voids.

Available in the colours: GS-GL (Beige and Ivory available on demand with a minimum quantity order of 500 lm). The code of the selected finish must be added to the article code. E.g.: PFX5PR 045... (chosen insert colour dark grey) PFX5PR 045GS.


**ON DEMAND MINIMUM QUANTITY 500 LM per colour and height**



B - Beige (E84)

A - Ivory (E81)

(price and delivery time to be agreed)

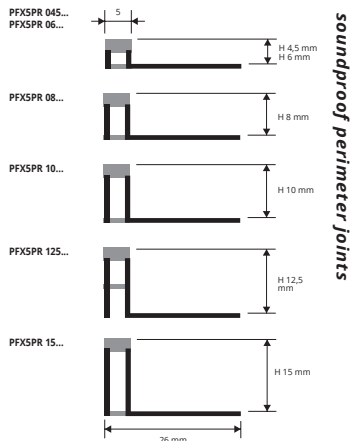

soundproof perimeter joints

\* = On demand, price and delivery time to be agreed.