




MORTAR-LAID JOINTS

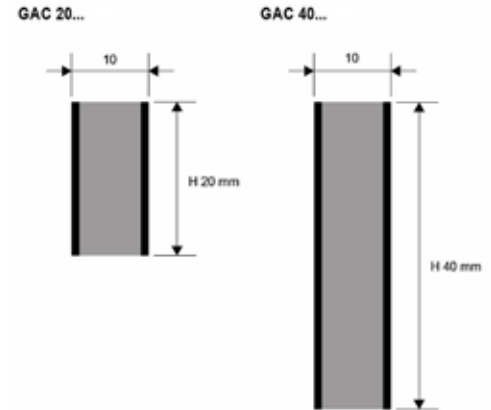

DESCRIPTION

MORTAR-LAID JOINTS are expansion joints composed of two profiles in stainless steel, connected between them with an expandable insert in vulcanized EPDM, available in different colours. The profiles in stainless steel protect the edges of the tile.

MATERIAL

MORTAR-LAID JOINTS are expansion joints composed of two profile in stainless steel AISI 304 / 1.4301 – V2A, connected between them with an expandable insert in vulcanized EPDM, available in different colours. They are available in the heights of 20 and 40 mm. The expandable insert in vulcanized EPDM can be polished. It has a visible surface of 8 mm and is available in black and grey colours (on request in Ivory and beige). The vulcanized EPDM has high chemical and mechanical resistance and it is fungus, bacteria and UV resistant. Thanks to their design, **MORTAR-LAID JOINTS** protect the edges of the tiles and for this reason they are suitable for any environment also with heavy traffic.

AREAS OF APPLICATION

MORTAR-LAID JOINTS in stainless steel AISI 304/1.4301 – V2A is suitable for every kind of environment where high resistance to mechanical and chemical stresses are required.

WARNINGS

Do not use **MORTAR-LAID JOINTS** in stainless steel AISI 304/1.4301 – V2A in the swimming pool and in environments where strong substances are used. For cutting the profile it is recommended to use a hacksaw with steel blade and treat the cutting surface with a stainless steel passivation product.

MAINTENANCE

MORTAR-LAID JOINTS do not require any special maintenance. It is suggested to clean them with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**MORTAR-LAID JOINTS**" according with the height and desired colour.
2. Cut "**MORTAR-LAID JOINTS**" to the desired length.
3. Cut with a trowel the fresh screed following the floor edges.
4. Apply the joint inside the fresh screed taking care to align it with the surface of the floor.
5. Proceed with the laying of the screed and flooring.

TEXT TEMPLATE FOR TENDERS

Delivery and installation of expansion joints, in the height of 20 / 40 mm, composed of two profile in stainless steel AISI 304 / 1.4301 – V2A, connected between them with an expandable insert in vulcanized EPDM. The expandable insert in black / grey vulcanized EPDM can be polished. It has a visible surface of 8 mm and high chemical and mechanical resistance. It is fungus, bacteria and UV resistant, like **MORTAR-LAID JOINTS** of the Progress Profiles company.

GAC 20/40... : Stainless steel AISI 304 / 1.4301 – V2A and expandable insert in EPDM

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt