




PRODILAT

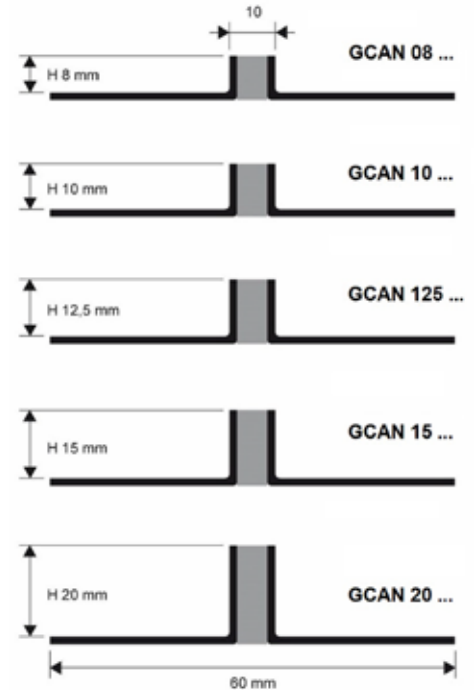

DESCRIPTION

PRODILAT is an expansion joint composed of two aluminium opposed L-shaped profiles connected between them with an expandable insert in vulcanized EPDM, available in different colours. Thanks to its design, the joint protects the edges of the tile. For this reason it is suitable for any environment also subject to heavy traffic.

MATERIAL

PRODILAT is an expansion joint composed of two opposed L-shaped profiles in natural aluminium, in the heights of 8 / 10 / 12,5 / 15 and 20 mm. The opposed L-shaped profiles are equipped with punched flanges that guarantee the anchorage of the joint to the support. The L-shaped profiles are joined together with an expandable insert in sandable vulcanized EPDM, with a visible surface of 8 mm. The EPDM is available in black and grey colours and on request in Ivory and beige and has high chemical and mechanical resistance. It is fungus, bacteria and UV resistant. Thanks to its design, **PRODILAT** protects tile edges. For this reason it is suitable for any environment also subject to heavy traffic.

AREAS OF USE

PRODILAT in natural aluminium is suitable for every kind of environment where good resistance to mechanical and chemical stresses are required.

WARNINGS

Do not use **PRODILAT** in natural aluminium in the swimming pool and in environments where aggressive substances are used. Clean immediately the surface of the profile from all remains of adhesive or grout after laying.

MAINTENANCE

PRODILAT does not require any special maintenance; it is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PRODILAT**" according to the tile thickness and desired colour.
2. Cut "**PRODILAT**" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Place the joint exactly on the screed joint and press the anchoring flange into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. After laying the joint should be 0,5 mm below the floor covering surface. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

TEXT TEMPLATE FOR TENDERS

Delivery and installation of expansion joint, in the height of 8 / 10 / 12,5 / 15 / 20 mm, composed of two L-shaped profiles in natural aluminium connected between them with an expandable insert in vulcanized EPDM in black / grey colour. The L-shaped profiles are equipped with punched flanges that guarantee their anchorage to the support. The profiles are connected between them with an expandable insert in vulcanized EPDM with a visible surface of 8 mm. The expandable insert in vulcanized EPDM can be polished and has high chemical and mechanical resistance. It is fungus, bacteria and UV resistant, like **PRODILAT** of the Progress Profiles company.

GCAN 08 / 10 / 125 / 15 / 20...: Natural aluminium

Profile height : _____ mm
 Profile length : _____ lm
 Material : _____ €/lm
 Application : _____ €/lm
 Total value : _____ €/lm