



# PROFLEX 25



## DESCRIPTION

**PROFLEX 25** is an expansion joint composed of a structure in shockproof vinyl resin and an expandable part in soft vinyl resin. The profile is equipped with punched flanges that guarantee its anchorage to the support.

## MATERIAL

**PROFLEX 25** is a co-extruded expansion joint composed of a structure in shockproof non-toxic vinyl resin and expandable part in soft vinyl resin. It is available in the height of 25 mm with a visible surface of 10 mm. The shockproof vinyl resin structure and the expandable part in soft vinyl resin are available in dark grey and light grey colour. The profile is equipped with punched flanges that guarantee its anchorage to the support. It is completed with an extension in shockproof non-toxic vinyl resin to obtain an overall height of 45 mm. The profile is resistant to fungus, bacteria and UV rays. The availability of different colours and extension, make **PROFLEX 25** a much sought-after expansion joint.

## AREAS OF USE

**PROFLEX 25** in co-extruded shockproof vinyl resin is suitable for the laying of printed concrete floor and terrazzo tiles in environments with pedestrian and light traffic.

## WARNINGS



Do not use **PROFLEX 25** in co-extruded shockproof vinyl resin in environments subject to heavy traffic. Do not clean it with substances that contain acetone and ethyl – butyl acetate (solvents).

## MAINTENANCE

**PROFLEX 25** does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

## LAYING INSTRUCTIONS

1. Choose "**PROFLEX 25**" according to the desired colour.
2. Cut "**PROFLEX 25**" to the desired length.
3. Place the joints on the support.
4. Lay the printed concrete floor or terrazzo tiles. After laying the joint should be 0.5 mm below the floor covering surface.

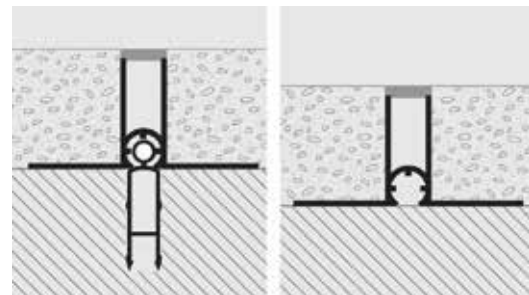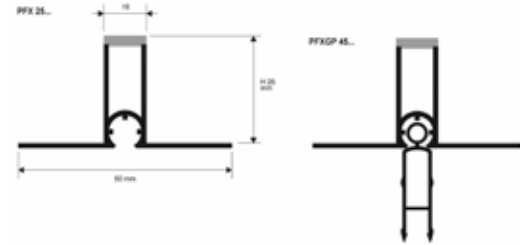

## TEXT TEMPLATE FOR TENDERS

Delivery and installation of co-extruded expansion joint with a height of 25 mm with a visible surface of 10 mm.

The shockproof vinyl resin structure and the expandable part in soft vinyl resin are in dark grey / light grey colour. The profile is equipped with punched flanges that guarantee its anchorage to the support. It is completed with an extension in shockproof non-toxic vinyl resin that can be applied to obtain an overall height of 45 mm. The profile is resistant to fungus, bacteria and UV rays, like PROFLEX 25 of the Progress Profiles company.

**PFX 25...** : Shockproof vinyl resin expansion joint

**GP 20...** : Joint extension

**PFXGP 45 ...** : Assembled joint

Profile height : \_\_\_\_\_ mm

Profile length : \_\_\_\_\_ mt

Material : \_\_\_\_\_ €/mt

Installation : \_\_\_\_\_ €/mt

Total value: \_\_\_\_\_ €/mt