



## PROFLEX ACC PR



### DESCRIPTION

**PROFLEX ACC PR** is a perimetral expansion joint composed of a L-shaped profile in stainless steel and an expandable insert in vinyl resin / rubber. The profile is equipped with a punched flange that guarantees its anchorage to the support.

### MATERIAL

**PROFLEX ACC PR** is an expansion joint composed of a L-shaped profile in polished stainless steel AISI 304 / 1.4301 – V2A and an expandable insert in vinyl resin / rubber. It is available in the heights of 8 / 10 / 12.5 / 15 and 20 mm with a visible surface of 12.5 mm. The L-shaped profile, that protect the tiles edges, is equipped with a punched flange that guarantee the anchorage of the joint to the support. The expandable insert in vinyl resin / rubber, available in black and grey colour (on demand in ivory and beige), is equipped with double - sided tape that guarantees its fixing to wall. The expandable part, with a visible surface of 11 mm, is fungus, bacteria and UV resistant. Its section and the high mechanical resistance, make **PROFLEX ACC PR** a good solution for the realization of expansion joints also in case of heavy traffic.

### AREAS OF USE

**PROFLEX ACC PR** in stainless steel AISI 304/1.4301 – V2A is suitable for every kind of environment where high resistance to mechanical and chemical stresses are required.



### WARNINGS


Do not use **PROFLEX ACC PR** in stainless steel AISI 304/1.4301 – V2A in the swimming pool and in environments where strong substances are used. For cutting the profile it is recommend to use a hacksaw with steel blade and treat the cutting surface with a stainless steel passivation product.

### MAINTENANCE

**PROFLEX ACC PR** does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

### LAYING INSTRUCTIONS

1. Choose "**PROFLEX ACC PR**" according to the tile thickness and desired colour.
2. Cut "**PROFLEX ACC PR**" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Remove the silicone film, place the joint along the perimeter and press the anchoring flanges into the adhesive.
4. Lay the tiles, aligning them with the profile leaving 1 mm joint. After laying the joint should be 0,5 mm below the floor covering surface. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

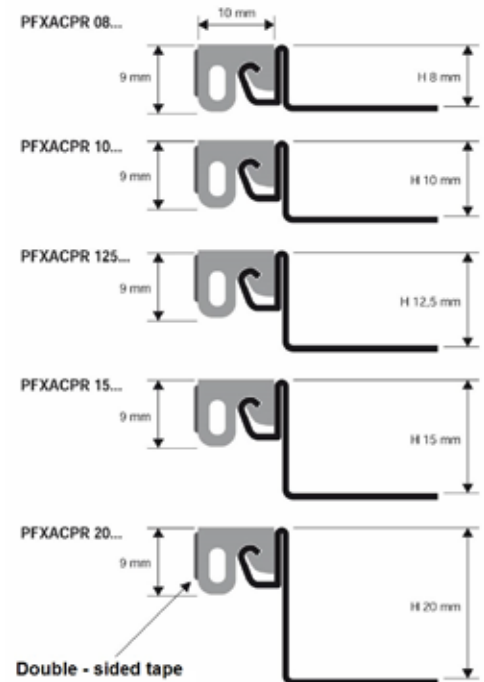

### TEXT TEMPLATE FOR TENDERS

Delivery and installation of perimetral expansion joint, in the height of 8 / 10 / 12.5 / 15 / 20 mm, with a visible surface of 12.5 mm. It is composed of a L-shaped profile in stainless steel AISI 304 / 1.4301 – V2A and an expandable insert in vinyl resin / rubber in black / grey colour. The L-shaped profile is equipped with a punched flange that guarantees its anchorage to the support. The expandable insert, equipped with a double - sided tape that guarantees its fixing to wall, has a visible surface of 11 mm and high chemical and mechanical resistance. It is fungus, bacteria and UV resistant, like PROFLEX ACC of the Progress Profiles company.

**PFXACPR 08/10/125/15/20...** : Stainless steel AISI 304/1.4301 - V2A and expandable insert in vinyl resin / rubber

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt