



PROFLEX ALN



DESCRIPTION

PROFLEX ALN is an expansion joint composed of two "F-shaped" profiles in aluminum that insert with each other ensuring the mutual sliding. The profile is equipped with punched flanges that guarantee its anchorage to the support.

MATERIAL

PROFLEX ALN is an expansion joint composed of two F-shaped profiles in natural aluminum that insert with each other ensuring the mutual sliding. It is available in the heights of 8 / 10 / 12.5 / 15 and 20 mm with a visible surface of 11 mm. The F-shaped profiles, that protect the tiles edges, are equipped with punched flanges that guarantee the anchorage of the joint to the support. Its section and the good mechanical resistance, make **PROFLEX ALN** a good solution for the realization of expansion joints also in case of heavy traffic.

AREAS OF USE

PROFLEX ALN in natural aluminium is suitable for every kind of environment where good resistance to mechanical and chemical stresses are required.

WARNINGS


Do not use **PROFLEX ALN** in natural aluminium in swimming pools and in environments where aggressive substances are used. Clean immediately the surface of the profile from all remains of adhesive or grout after laying.

MAINTENANCE

PROFLEX ALN does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROFLEX ALN**" according to the tile thickness.
2. Cut "**PROFLEX ALN**" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Place the joint exactly over the screed joint and press the anchoring flange into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. After laying the joint should be 0,5 mm below the floor covering surface. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all remains of grout from the surface of the profile.

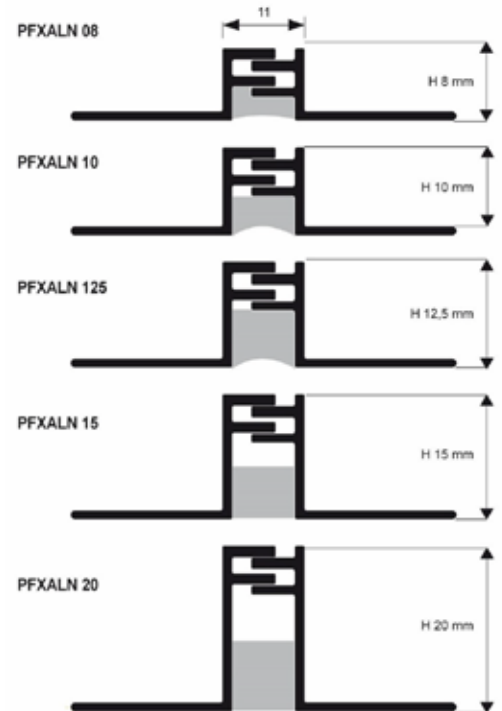

TEXT TEMPLATE FOR TENDERS

Delivery and installation of expansion joint, in the height of 8 / 10 / 12.5 / 15 / 20 mm, with a visible surface of 11 mm. It is composed of two F-shaped profiles in natural aluminium that insert with each other ensuring the mutual sliding. The F-shaped profiles are equipped with punched flanges that protect the tiles edges and guarantee the joint anchorage to the support, like PROFLEX ALN of the Progress Profiles company.

PFXALN 08 / 10 / 125 / 15 / 20 : Natural aluminium.

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt