




# PROFLEX OT

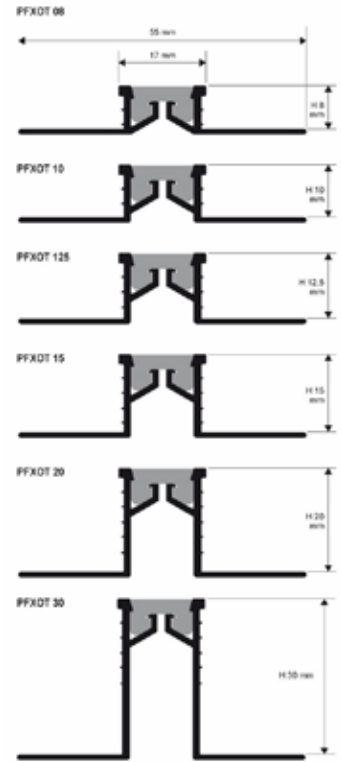

## DESCRIPTION

**PROFLEX OT** is an expansion joint composed of two L-shaped profiles in brass and an expandable insert in vinyl resin / rubber. The profile is equipped with punched flanges that guarantee its anchorage to the support.

## MATERIAL

**PROFLEX OT** is an expansion joint composed of two L-shaped profiles in natural brass and an expandable insert in vinyl resin / rubber. It is available in the heights of 8 / 10 / 12.5 / 15 and 20 mm with a visible surface of 17 mm. The L-shaped profiles, that protect the tiles edges, are equipped with punched flanges that guarantee the anchorage of the joint to the support; they are joined together with an expandable insert in vinyl resin / rubber available in black and grey colour (on demand in ivory and beige). The expandable part, with a visible surface of 11 mm, is fungus, bacteria and UV resistant. Its section and the high mechanical resistance, make **PROFLEX OT** a good solution for the realization of expansion joints also in case of heavy traffic.

## AREAS OF USE

**PROFLEX OT** in natural brass is suitable for every kind of environment where good resistance to mechanical and chemical stresses are required.

## WARNINGS

Do not use **PROFLEX OT** in natural brass in the swimming pool and in environments where strong substances are used. Clean immediately the surface of the profile from all remains of adhesive or grout after laying.

## MAINTENANCE

**PROFLEX OT** does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

## LAYING INSTRUCTIONS

1. Choose "**PROFLEX OT**" according to the tile thickness and desired colour.
2. Cut "**PROFLEX OT**" to the desired length and apply the adhesive on the support where the profile will be laid.
3. Place the joint exactly over the screed joint and press the anchoring flange into the adhesive.
4. Lay the tiles, aligning them with the profile leaving a 2 mm joint. After laying the joint should be 0,5 mm below the floor covering surface. Remove immediately all the remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

## TEXT TEMPLATE FOR TENDERS

Delivery and installation of expansion joint, in the height of 8 / 10 / 12.5 / 15 / 20 mm, with a visible surface of 17 mm. It is composed of two L-shaped profiles in natural brass connected between them with an expandable insert in vinyl resin / rubber in black / grey colour. The L-shaped profiles are equipped with punched flanges that guarantee the joint anchorage to the support. The expandable insert in vinyl resin / rubber has a visible surface of 11 mm and high chemical and mechanical resistance. It is fungus, bacteria and UV resistant, like PROFLEX OT of the Progress Profiles company.

**PFXOT 08 / 10 / 125 / 15 / 20 / 30... :**  
Natural brass and vinyl resin / rubber.

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt