



## PROPLATE FIX



### DESCRIPTION

**PROPLATE FIX** is a profile in aluminium used to cover the hole in the concrete or in the flooring in case of structural joints. Its particular geometry and ease of fixing, make it a highly sought after profile that could be apply in a lot of environments.

### MATERIAL

**PROPLATE FIX** is a profile silver anodized aluminium, with a visible surface of 50 and 70 mm, used to cover the hole in the concrete or in the flooring in case of structural joints. The profile, 5 mm height, is equipped in the backside with a dovetail cavity guaranting the fixing of stainless steel clips. The perimetral version is available. For flooring and perimetral application are necessary 7 clips for each bar 3 meter length; for wall and ceiling 5 clips. Its particular geometry and ease of fixing, make **PROPLATE FIX** a highly sought after profile that could be apply in a lot of environments.

### AREAS OF USE

**PROPLATE FIX** in anodized aluminium is suitable for every kind of environment where good resistance to mechanical and chemical stresses are required.

### WARNINGS



Do not use **PROPLATE FIX** in anodized aluminium in swimming pools, in environments where aggressive substances are used, outdoor and where heavy traffic is expected.

### MAINTENANCE

**PROPLATE FIX** does not require special maintenance; for its cleaning is recommended to use normal house cleaning products.

### INSTALLATION INSTRUCTION

1. Choose "**PROPLATE FIX**" in the desired width.
2. Cut "**PROPLATE FIX**" to the desired length.
3. Place the stainless steel clips into the dovetail cavity in the backside of the profile. Use 7 clips for bar for flooring and perimetral application and 5 for wall and ceiling.
4. Place the profile over the structural joint and press it with a uniform pressure favoring the insertion and locking of the clips.

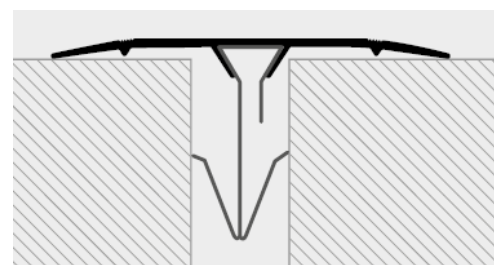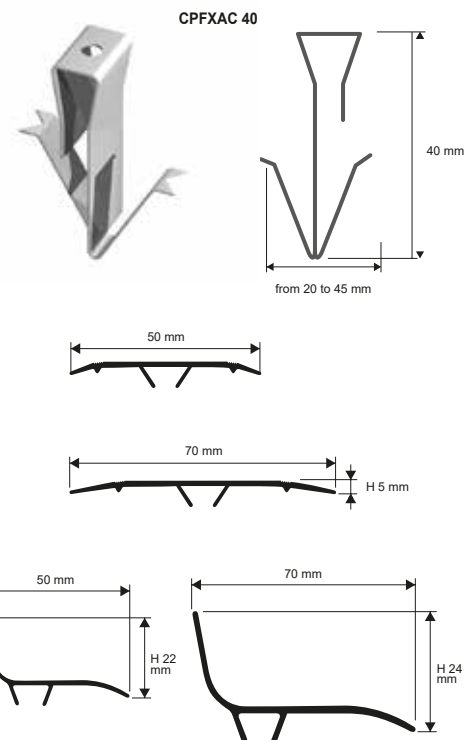

### TEXT TEMPLATE FOR TENDERS

Supply and installation of anodized aluminium profile with a visible surface of 50 / 70 mm, used to cover the hole in the concrete or in the flooring in case of structural joints. The profile, 5 mm height, is equipped in the backside with a dovetail cavity guaranting the fixing of stainless steel clips that guarantee the profile fixing, like PROPLATE FIX of the Progress Profiles company.

**PETFXPAA / PETFXAA 50 - 70:** Silver anodized aluminium

**CPFXAC 40:** Stainless steel clips

Profile width : \_\_\_\_\_ mm  
Profile lenght : \_\_\_\_\_ mt  
Material : \_\_\_\_\_ €/mt  
Application : \_\_\_\_\_ €/mt  
Total value : \_\_\_\_\_ €/mt