

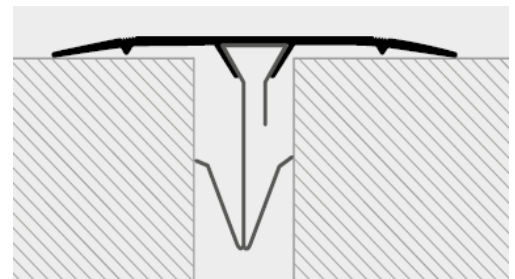


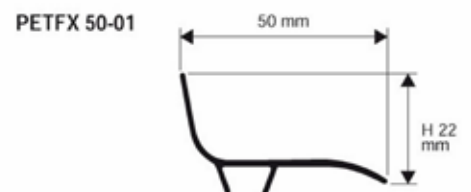

PROPLATE FIX

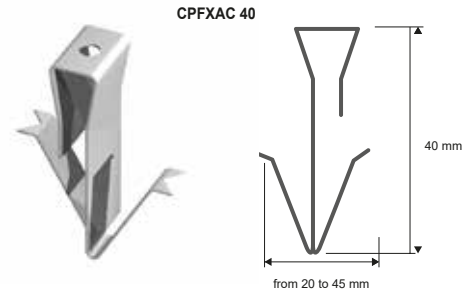

DESCRIPTION

PROPLATE FIX is a profile in vinyl resin used to cover the hole in the concrete or in the flooring in case of structural joints. Its particular geometry and ease of fixing, make it a highly sought after profile that could be apply in a lot of environments.

MATERIAL

PROPLATE FIX is a profile in white rigid non-toxic shockproof vinyl resin, with a visible surface of 50 mm, used to cover the hole in the concrete or in the flooring in case of structural joints. The profile, 5 mm height, is equipped in the backside with a dovetail cavity guaranting the fixing of stainless steel clips. The perimetral version is available. For flooring and perimetral application are necessary 7 clips for each bar 3 meter length; for wall and ceiling 5 clips. Its particular geometry and ease of fixing, make **PROPLATE FIX** a highly sought after profile that could be apply in a lot of environments.

AREAS OF USE

PROPLATE FIX in rigid non-toxic shockproof vinyl resin is suitable for every kind of environment where good resistance to chemical stresses are required.

WARNINGS

Do not use **PROPLATE FIX** in rigid non-toxic shockproof vinyl resin in swimming pools, in environments where aggressive substances are used, outdoor and where heavy traffic is expected

MAINTENANCE

PROPLATE FIX does not require special maintenance; it is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROPLATE FIX**" in the desired width.
2. Cut "**PROPLATE FIX**" to the desired length
3. Place the stainless steel clips into the dovetail cavity in the backside of the profile. Use 7 clips for bar for flooring and perimetral application and 5 for wall and ceiling.
4. Place the profile over the structural joint and press it with a uniform pressure favoring the insertion and locking of the clips.

TEXT TEMPLATE FOR TENDERS

Supply and installation of rigid non-toxic shockproof vinyl resin profile with a visible surface of 50 mm, used to cover the hole in the concrete or in the flooring in case of structural joints. The profile, 5 mm height, is equipped in the backside with a dovetail cavity guaranting the fixing of stainless steel clips that guarantee the profile fixing, like **PROPLATE FIX** of the Progress Profiles company.

PETFXP / PETFXP 50-01: Rigid non-toxic shockproof vinyl resin
CPFXAC 40: Stainless steel anchor clips

Profile width : _____ mm
 Profile lenght : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt