

PROFOIL PANEL are high density extruded polystyrene panels covered on both sides with a steam- and waterproofing membrane. The membrane is waterproofing and the adhesive to fix them reinforces the panels for a quick and inexpensive laying.

NOT AVAILABLE IN GERMANY

PROFOIL PANEL

HIGH DENSITY EXTRUDED
POLYSTYRENE PANEL

PROFOIL PANEL 1524 mm - high density extruded polystyrene
915 mm x 1524 mm = 1,394 m²


Article	H mm	Pcs /pallet	Mq /pallet			
PFLPAN6	6,35	85	118,49			
PFLPAN9	9,50	80	111,52			
PFLPAN13	12,70	60	83,64			
PFLPAN16	15,90	50	69,70			
PFLPAN25	25,00	30	41,82			
PFLPAN38	38,10	20	27,88			
PFLPAN50	50,80	15	20,91			

PROFOIL PANEL in 1524 mm is available only in small quantity.
Please contact the office for availability.


PROFOIL PANEL 2700 mm - high density extruded polystyrene
915 mm x 2700 mm = 2,470 m²

Article	H mm	Pcs /pallet	Mq /pallet			
PFLPAN627	6,35	85	209,95			
PFLPAN927	9,50	80	197,60			
PFLPAN1327	12,70	60	148,20			
PFLPAN1627	15,90	50	123,50			
PFLPAN2527	25,00	30	74,10			
PFLPAN3827	38,10	20	49,40			
PFLPAN5027	50,80	15	37,05			

PFLPAN...

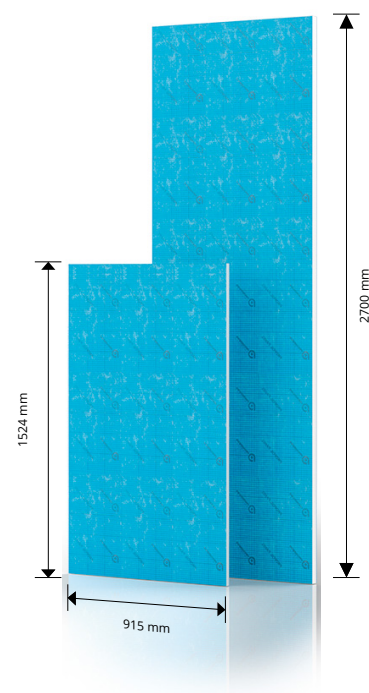

THICKNESS PROFOIL PANEL

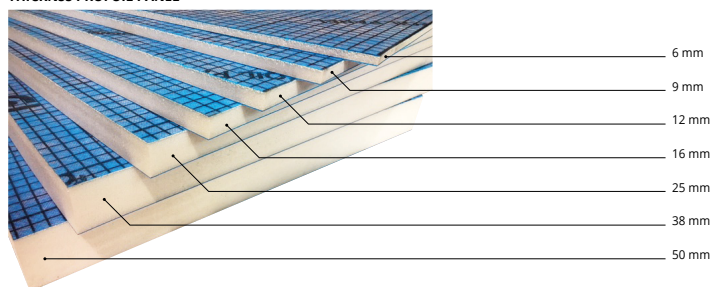

PROFOIL AND PROBAND DOWELS, WASHERS, SCREWS

STAINLESS STEEL/ZINC-COATED METAL/GLASS FIBER NET



PROFOIL DOWELS - pack. 250 Pc

Article	L mm		
TZPFP 110 (zinc-coated metal)	100		
TZPFP 140 (zinc-coated metal)	140		
TZPFP 170 (zinc-coated metal)	170		
TZPFP 200 (zinc-coated metal)	200		
TIPFP 110 (stainless steel)	110		
TIPFP 140 (stainless steel)	140		
TIPFP 170 (stainless steel)	170		
TIPFP 200 (stainless steel)	200		
TIPFP 250 (stainless steel)	250		



PROFOIL WASHERS (ZINC-COATED METAL) - pack. 100 Pc

Article	Pcs/Pack.	ø mm		
RFPFP 36	100	35		



PROFOIL SCREWS (ZINC-COATED METAL)

Article	Pcs/Pack.	L mm		
VACPFP 35	1000	35		
VACPFP 55	1000	45		
VACPFP 80	1000	80		



PROBAND NET - roll 50 m

Article	H mm	
PRBNET 100	100	

PRO GOBOARD PANEL highdensity polyisocyanurate foam panel, covered on both sides with a fibre-glass reinforced cement-based waterproof coating to allow the laying of tiles. The panels, tested for a resistance long duration, are available in thickness of 6,25 / 12,5 / 25 and 50 mm, size of 92 x 152 cm and 122 x 244 cm and can be used on floors, false ceilings, walls, showers and ceilings.

PRO GOBOARD PANEL

HIGH DENSITY POLYISOCYANURATE
FOAM PANEL

PRO GOBOARD PANEL - highdensity polyisocyanurate foam

Article	Description	Pcs/pallet	Mq/pallet		
PGOBOR06	PRO GOBOARD H 6,25 mm - 92 cm x 152 cm - 1,40 m ²	75	105		
PGOBOR125	PRO GOBOARD H 12,5 mm - 92 cm x 152 cm - 1,40 m ²	60	84		
PGOBOR25	PRO GOBOARD H 25 mm - 122 cm x 244 cm - 2,98 m ²	30	89,4		
PGOBOR50	PRO GOBOARD H 50 mm - 122 cm x 244 cm - 2,98 m ²	15	44,70		

PGOBOR...

