



PROEND



DESCRIPTION

PROEND is a non-slip profile in aluminium for stairs, equipped with a knurled surface. Its particular section and the availability in three finishes make it an elegant and valued profile also in case of modern stairs.

MATERIAL

PROEND is a non-slip profile in anodized silver, gold and bronze aluminium for stairs, equipped with knurled surface. The profile has a horizontal visible surface, partially knurled, of 48 mm and a vertical smooth one of the same dimension. It is available with adhesive, without adhesive and punched. The punched version can be fix with screws. Its particular section and the availability in three finishes make **PROEND** an elegant and valued profile also in case of modern stairs.

AREAS OF USE

PROEND in anodized aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.

WARNINGS

Don't use **PROEND** in anodized aluminium outdoors and in environments where aggressive substances are used. Clean immediately the surface of the profile from all remains

of alkaline substances; the permanence of these substances on the surface may lead to formation of non-removable aluminium hydroxide (dark halos).

MAINTENANCE

PROEND does not require any special maintenance; it is recommended to clean it with normal household cleaning products.

LAYING INSTRUCTIONS




Choose "**PROEND**" according to the desired finish and fixing.
2. Cut "**PROEND**" to the desired length.

With and without adhesive version

- Remove all remains of oil, grease and dirt from the surface where the profile will be laid.
- When the surface is dry, remove the protective film (apply silicone).
- Correctly position the profile and press it without hitting.

Punched version

- Align the profile and mark the position of the holes on the support.
- Drill the support with a 5 mm diameter bit and insert the 5 x 25 mm. rawlplugs.
- Align the profile to the holes and screw it.

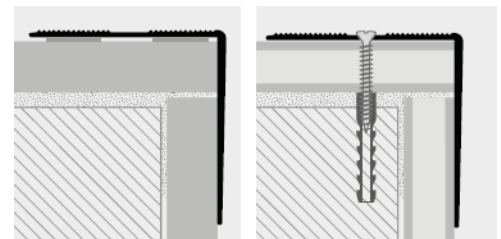

TEXT TEMPLATE FOR TENDERS

Delivery and installation of a non-slip profile in anodized silver / gold / bronze aluminium for stairs. The punched profile / the profile with / without adhesive has a horizontal visible surface, partially knurled, of 48 mm and a vertical smooth one of the same dimension, like PROEND of the Progress Profiles company.

PED... 48/A/F : Anodized gold, silver and bronze aluminium

Profile lenght: _____ mt
Material: _____ €/mt
Application : _____ €/mt
Total value: _____ €/mt