




PROEND GRIP

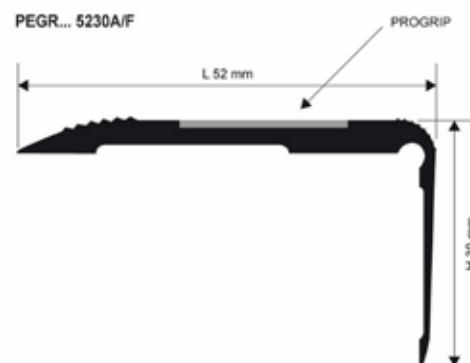

DESCRIPTION

PROEND GRIP is a profile in aluminium with a non-slip insert in carborundum for stairs. Its particular section and the availability in three different finishes, make it an elegant and valued profile also in case of modern stairs.

MATERIAL

PROEND GRIP is a profile in anodized gold, silver and bronze aluminium with a non-slip insert in carborundum for stairs. The profile has a horizontal visible surface, partially knurled, of 52 mm on which the non-slip insert in carborundum will be fixed. The vertical side with a visible surface of 30 mm is perfectly smooth. It is available with adhesive and punched. The punched version can be fix with screws. Its particular section and the availability in three different finishes, make **PROEND GRIP** an elegant and valued profile also in case of modern stairs.

AREAS OF USE

PROEND GRIP in anodized aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.

WARNINGS

Don't use **PROEND GRIP** in anodized aluminium outdoors and in environments where aggressive substances are used. Clean immediately the surface of the profile from all remains of alkaline substances; the permanence of these

substances on the surface may lead to formation of non-removable aluminium hydroxide (dark halos).

MAINTENANCE

PROEND GRIP does not require any special maintenance; it is recommended to clean it with normal household cleaning products.

LAYING INSTRUCTIONS


1. Choose "**PROEND GRIP**" according to the desired finish and fixing.
2. Cut "**PROEND GRIP**" to the desired length.

With adhesive

3. Remove all remains of oil, grease and dirt from the surface where the profile will be laid.
4. When the surface is dry, remove the protective film.
5. Correctly position the profile and press it without hitting.
6. Apply the carborundum strip in the desired colour.

Punched version

3. Align the profile and mark the position of the holes on the support.
4. Drill the support with a 5 mm diameter bit and insert the 5 x 25 mm rawlplugs.
5. Align the profile to the holes and screw it.
6. Apply the carborundum strip in the desired colour.

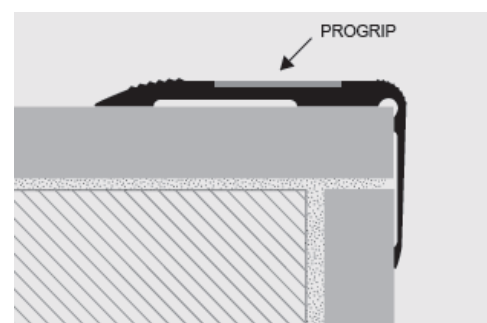

TEXT TEMPLATE FOR TENDERS

Delivery and installation of profile in anodized silver / gold / bronze aluminium with a non-slip insert in carborundum for stairs. The profile with adhesive / punched has a horizontal visible surface, partially knurled, of 52 mm on which the non-slip insert in carborundum will be fixed. The vertical side with a visible surface of 30 mm is perfectly smooth, like PROEND GRIP of the Progress Profiles company.

PEGR... 5230A / F: Anodised gold, silver and bronzealuminium

PEGR... 523016AS / FS: Anodised gold, silver and bronze aluminium self pack

Profile width : _____ mm
Profile lenght : _____ mt
Material : _____ €/mt
Application : _____ €/mt
Total value : _____ €/mt