



## PROEND INS



### DESCRIPTION

**PROEND INS** is a profile in aluminium with a non-slip insert in rubber for stairs. Its particular section and the availability in three different finishes, make it an elegant and valued profile also in case of modern stairs.

### MATERIAL

**PROEND INS** is a profile in anodized gold, silver and bronze aluminium with an interchangeable non-slip insert in rubber for stairs. The profile has a horizontal visible surface, partially knurled, of 45 mm on which the non-slip rubber insert in black colour is applied. The vertical side with a visible surface of 28 mm is perfectly smooth. It is available with adhesive and punched. The punched version can be fix with screws. Its particular section and the availability in three different finishes, make **PROEND INS** an elegant and valued profile also in case of modern stairs.

### AREA OF USE

**PROEND INS** in anodized aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.

### WARNINGS

Don't use **PROEND INS** in anodized aluminium outdoors and in environments where aggressive substances are



used. Clean immediately the surface of the profile from all remains of alkaline substances; the permanence of these substances on the surface may lead to formation of non-removable aluminium hydroxide (dark halos).

### MAINTENANCE

**PROEND INS** does not require any special maintenance; it is recommended to clean it with normal household cleaning products.

### LAYING INSTRUCTION

1. Choose "**PROEND INS**" according to the desired finish and fixing.
2. Cut "**PROEND INS**" to the desired length.


#### Adhesive version

3. Remove all remains of oil, grease and dirt from the surface where the profile will be laid.
4. When the surface is dry, remove the protective film.
5. Correctly position the profile and press it without hitting.

#### Punched version

3. Align the profile and mark the position of the holes on the support.
4. Drill the support with a 5 mm diameter bit and insert the 5 x 25 mm rawlplugs.
5. Align the profile to the holes and screw it.
6. Apply the rubber insert.

PED... 4528A  
PED... 4528F  
PED... 452816FS

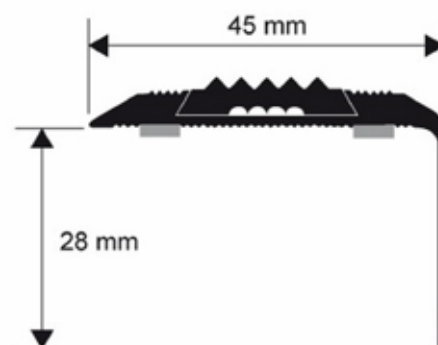

### TEXT TEMPLATE FOR TENDERS

Delivery and installation of profile in anodized silver / gold / bronze aluminium with an interchangeable non-slip insert in black rubber for stairs. The profile with adhesive / punched has a horizontal visible surface, partially knurled, of 45 mm on which the non-slip rubber insert is applied. The vertical side with a visible surface of 28 mm is perfectly smooth, like PROEND INS of the Progress Profiles company.

**PED... 4528A/F:** Anodized gold, silver and bronze aluminium

**PED... 452816FS:** Anodized gold, silver and bronze aluminium self pack

Profile width : \_\_\_\_\_ mm  
Profile length : \_\_\_\_\_ mt  
Material : \_\_\_\_\_ €/mt  
Installation : \_\_\_\_\_ €/mt  
Total value : \_\_\_\_\_ €/mt