



# PROSTAIR 50



## DESCRIPTION

**PROSTAIR 50** is a profile in aluminium with a non-slip insert in vinyl resin / rubber for stairs. Its particular section and the availability in four different heights, make it an elegant and valued profile also in case of modern stairs.

## MATERIAL

**PROSTAIR 50** is a profile composed by a support in natural aluminium and an interchangeable non-slip insert in vinyl resin / rubber for stairs. It is available in the heights of 8 - 10 - 12.5 and 15 mm. The non-slip vinyl resin / rubber insert, with a visible serrated surface of 50 mm, is available in black, grey, ivory and beige colours. The aluminium support is equipped with a punched flange that guarantees a perfect adhesion with the adhesive. The vertical side of the support that is in contact with the flooring, is provided with grooves that guarantee the anchorage of the grout. The profile is equipped with end caps. Its particular section and the availability in four different heights, make **PROSTAIR 50** an elegant and valued profile also in case of modern stairs.

## AREAS OF USE

**PROSTAIR 50** in natural aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.



## WARNINGS



Don't use **PROSTAIR 50** in natural aluminium outdoors and in environments where aggressive substances are used. Clean immediately the surface of the profile from all remains of alkaline substances; the permanence of these substances on the surface may lead to formation of non - removable aluminium hydroxide (dark halos).

## MAINTENANCE

**PROSTAIR 50** does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

## LAYING INSTRUCTIONS

1. Choose "**PROSTAIR 50**" according to the tile thickness and desired colour.
2. Cut "**PROSTAIR 50**" to the desired length.
3. Lay the tiles on the step rise and apply the adhesive on the area of the step tread, where the profile will be laid.
4. Fill the bottom cavity of the support with adhesive and lay the profile on the step tread, resting it on the tiles of the rise. Remove immediately all the remains of adhesive from the surface of the profile.
5. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile.
6. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

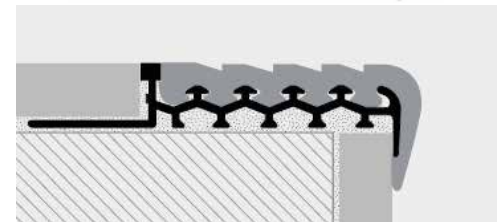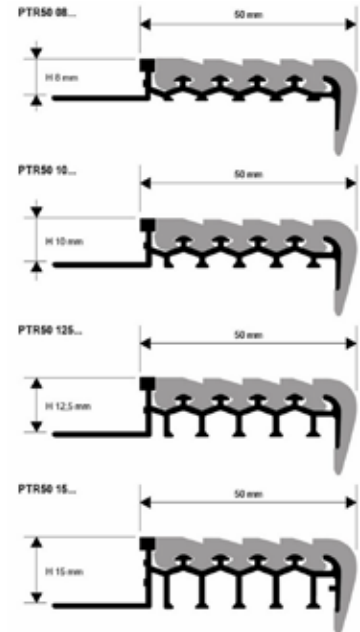

## TEXT TEMPLATE FOR TENDERS

Delivery and installation of profile with a support in natural aluminium with a height of 8 / 10 / 12.5 / 15 mm and a non-slip insert in vinyl resin / rubber for stairs in black / grey / ivory / beige colour. The non-slip vinyl resin / rubber insert has a visible serrated surface of 50 mm. The aluminium support is equipped with a punched flange that guarantee the adhesion of the adhesive. The vertical side of the support that is in contact with the flooring, is equipped with grooves that guarantee the anchorage of the grout. The profile is equipped with end caps, like **PROSTAIR 50** from Progress Profiles company.

**PTR 50 08 / 10 / 12.5 / 15...** : Natural aluminium and vinyl resin / rubber

Profile height: \_\_\_\_\_ mm  
 Profile length: \_\_\_\_\_ mt  
 Material: \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value: \_\_\_\_\_ €/mt