



# PROSTAIR ACC



## DESCRIPTION

**PROSTAIR ACC** is a non-slip profile in stainless steel for stairs, equipped with knurled surface. Its special section and the availability in six heights make it an elegant and valued profile also in case of modern stairs.

## MATERIAL

**PROSTAIR ACC** is a non-slip profile in satin finish stainless steel AISI 304/1.4301-V2A for stairs. It is equipped with knurled surface and a punched flange that guarantees a perfect adhesion with the adhesive. The profile has a horizontal visible knurled surface of 30 mm and a vertical smooth one of 10 mm. It is available in the heights of 4,5 - 6 - 8 - 10 - 12,5 and 15 mm. The profile is equipped with plastic end caps with stainless steel satin effect. Its particular section and the availability of six heights, make **PROSTAIR ACC** a much sought after profile, even in case of elegant stairs.

## AREAS OF USE

**PROSTAIR ACC** in stainless steel AISI 304/1.4301 - V2A is suitable for every kind of environment where high resistance to mechanical and chemical stresses are required.



## WARNINGS



Do not use **PROSTAIR ACC** in stainless steel AISI 304/1.4301 - V2A in the swimming pool and in environments where strong substances are used. For cutting the profile it is recommend to use a hacksaw with steel blade and treat the cutting surface with a stainless steel passivation product.

## MAINTENANCE

**PROSTAIR ACC** does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

## LAYING INSTRUCTIONS

1. Choose "**PROSTAIR ACC**" according to the floor thickness.
2. Lay the tiles on the step rise and apply the adhesive on the area of the step tread, where the profile will be laid.
3. Fill the bottom cavity of the profile with adhesive and lay the profile on the step tread, resting it on the tiles of the rise.
4. Lay the tiles on the step tread aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile.
5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

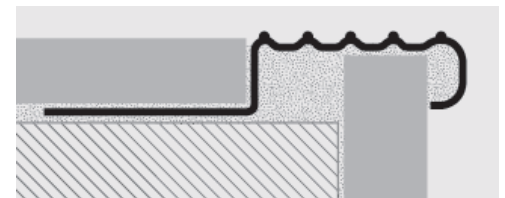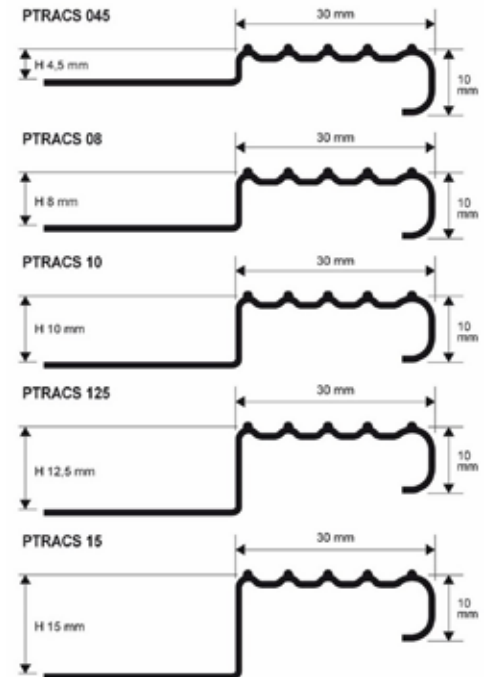

## TEXT TEMPLATE FOR TENDERS

Delivery and installation of non-slip profile in satin finish stainless steel AISI 304/1.4301-V2A for stairs in the height of 4,5 / 6 / 8 / 10 / 12,5 / 15 mm. It is equipped with knurled surface and a punched flange that guarantees a perfect adhesion with the adhesive. The profile has a horizontal visible knurled surface of 30 mm and a vertical smooth one of 10 mm. The profile is equipped with plastic end caps with stainless steel satin effect, like **PROSTAIR ACC** from Progress Profiles company.

**PTRACS 045/08/10/125/15:** Satin finish stainless steel AISI 304/1.4301-V2A.

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt