



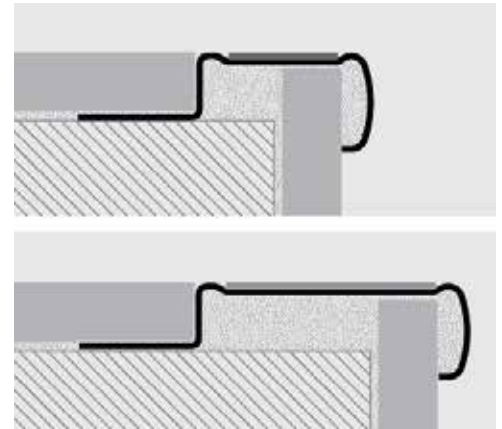

# PROSTAIR GRIP ACC

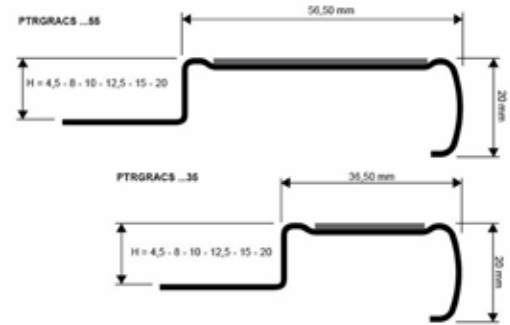

## DESCRIPTION

PROSTAIR GRIP ACC is a profile in stainless steel with a non-slip insert in carborundum for stairs. Its particular section and the availability in seven different finishes, make it an elegant and valued profile also in case of modern stairs.

## MATERIAL

PROSTAIR GRIP ACC is a profile in satin finish stainless steel AISI 304/1.4301-V2A with a non-slip insert in carborundum for stairs. It is equipped with a punched flange that guarantees a perfect adhesion with the adhesive. The profile has a horizontal visible surface of 36,5 and 56,5 mm and a vertical smooth one of 20 mm. It is available in the heights of 4,5 - 6 - 8 - 10 - 12,5 - 15 and 20 mm. The carborundum insert is available in transparent, white, black, grey, yellow and brown colours. The profile is equipped with plastic end caps with stainless steel satin effect. Its particular section and the availability of seven heights, make PROSTAIR GRIP ACC a much sought after profile, even in case of elegant stairs.

## AREAS OF USE

PROSTAIR GRIPP ACC in stainless steel AISI 304/1.4301 - V2A is suitable for every kind of environment where high resistance to mechanical and chemical stresses are required.

## WARNINGS

Do not use PROSTAIR GRIP ACC in stainless steel AISI 304/1.4301 - V2A in the swimming pool and in environments where strong substances are used. For cutting the profile it is recommend to use a hacksaw with steel blade and treat the cutting surface with a stainless steel passivation product.

## MAINTENANCE

PROSTAIR GRIP ACC does not require any special maintenance. It is recommended to clean it with normal household cleaning products.

## LAYING INSTRUCTIONS

1. Choose "PROSTAIR GRIP ACC" according to the floor thickness and desired non-slip insert colour.
2. Lay the tiles on the step rise and apply the adhesive on the area of the step tread, where the profile will be laid.
3. Fill the bottom cavity of the profile with adhesive and lay the profile on the step tread, resting it on the tiles of the rise covering.
4. Lay the tiles on the step tread aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile.
5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.
6. Apply the carborundum non-slip insert.

## TEXT TEMPLATE FOR TENDERS

Delivery and installation of profile in satin finish stainless steel AISI 304/1.4301 -V2A with a non-slip insert in transparent / white / black / grey / yellow / brown carborundum colour for stairs. It is equipped with a punched flange that guarantees a perfect adhesion with the adhesive. The profile, in the height of 4,5 / 6 / 8 / 10 / 12,5 / 15 / 20 mm, has a horizontal visible surface of 36,5 / 56,5 mm and a vertical smooth one of 20 mm. The profile is equipped with plastic end caps with stainless steel satin effect, like PROSTAIR GRIP ACC from Progress Profiles company.

**PTRGRACS 045-06-08-10-125-150-20/55/35:** Satin finish stainless steel AISI 304/1.4301-V2A.

Profile height: \_\_\_\_\_ mm  
 Profile length: \_\_\_\_\_ ml  
 Material: \_\_\_\_\_ €/ml  
 Application: \_\_\_\_\_ €/ml  
 Total value: \_\_\_\_\_ €/ml