




PROSTAIR KL 20



PTRKLAA 2045

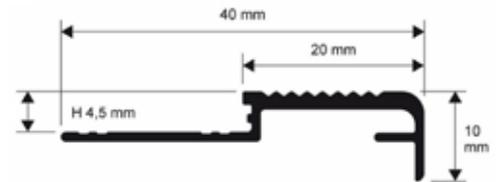

DESCRIPTION

PROSTAIR KL 20 is an aluminium non-slip profile for stairs, equipped with knurled surface, to be applied during the application of the covering. Its special geometry makes it very elegant and valued also in the case of modern stairs.

MATERIAL

PROSTAIR KL 20 is an anodized silver aluminium non-slip profile for stairs composed of a punched flange that guarantees a perfect grip to the adhesive. It has 20 mm horizontal visible knurled surface and 10 mm vertical smooth surface. The profile is available in height of 4.5 mm and it is equipped with grooves on the vertical surface that is in contact with the flooring, to guarantee grout anchorage. Its particular geometry, combined with the four finishes, make **PROSTAIR KL 20** a highly sought after profile, even in the case of elegant stairs.

AREAS OF USE

PROSTAIR KL 20 in anodized aluminium is suitable for every kind of indoor stairs with ceramic, terracotta floorings, wood and natural stone coverings.

WARNINGS


Do not use **PROSTAIR KL 20** in anodized aluminium in the swimming pool, outdoor and in environments where aggressive substances are present.

MAINTENANCE

PROSTAIR KL 20 does not require any special maintenance. It is recommended to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Cut "**PROSTAIR KL 20**" to the desired length.
2. Lay the tiles on the step rise and apply the adhesive on the area of the step tread, where the profile will be laid.
3. Fill in the cavities on the bottom of the profile and lay it on the step tread, resting it on the tiles of the rise covering.
4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile.
5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

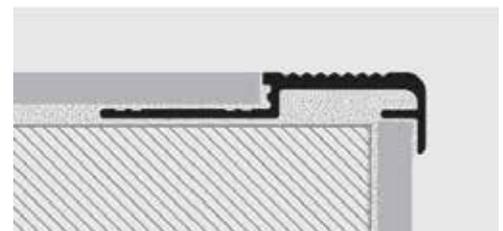

TEXT TEMPLATE FOR TENDERS

Delivery and installation of anodised silver aluminium non-slip profile for stairs with height of 4.5 mm. It is composed of a punched flange that guarantees a perfect grip to the adhesive. It has 20 mm. horizontal visible knurled surface and 10 mm. vertical smooth surface. The profile is equipped with grooves on the vertical side that is in contact with the flooring, to guarantee grout anchorage, like **PROSTAIR KL 20** of the Progress Profiles company.

PTRKLAA 2045: Anodized silver aluminium.

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt