




PROSTAIR LED

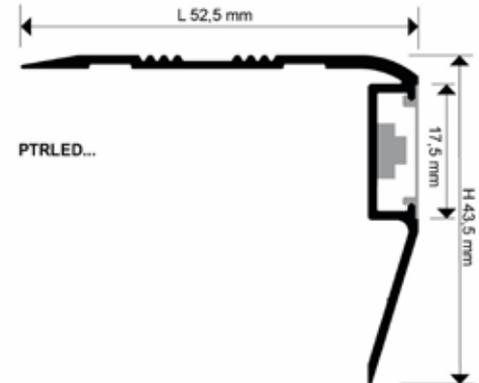

DESCRIPTION

PROSTAIR LED is an aluminium non-slip profile for stairs equipped with a knurled surface and an integrated LED lighting system to be applied after the installation of the covering. Its particular design makes it a much sought after and elegant profile also for modern stairs.

MATERIAL

PROSTAIR LED is an anodized silver aluminium non-slip profile for stairs equipped with a knurled surface and an integrated LED lighting system that can generate a cold, hot and neutral suffused light to be applied after the installation of the covering. It is composed of a horizontal knurled visible surface, 52.5 mm. in width and a flat vertical one with height of 43.5 mm. The LED system, integrated in the vertical side, has an overall height of 17.5 mm. Available in a punched version to fix with screws, an adhesive and without adhesive version. Its particular design and the ease of installation, make **PROSTAIR LED** a much sought after and very elegant profile also for modern stairs.

AREA OF USE

PROSTAIR LED in anodized aluminium is suitable for every kind of indoor stairs with ceramic, terracotta floorings, wood and natural stone coverings.

WARNINGS

Do not use **PROSTAIR LED** in anodized aluminium in the swimming pool, outdoor and in environments where aggressive substances are present.

MAINTENANCE

PROSTAIR LED does not require any special maintenance; it is suggested to clean it with normal household cleaning products.

INSTRUCTION INSTALLATIONS


1. Choose "**PROSTAIR LED**" according to the desired light and polycarbonate strip.
2. Cut "**PROSTAIR LED**" to the desired length.

Adhesive and without adhesive version

3. Remove all remains of oil, grease and dirt from the surface where the profile will be laid.
4. When the surface is dry, remove the protective film (apply silicone).
5. Correctly position the profile and press it without hitting.

Punched version

3. Align the profile and mark the position of the holes on the support.
4. Drill the support with a 5 mm. diameter bit and insert the 5 x 25 mm. rawlplugs.
5. Align the profile to the holes and screw it.

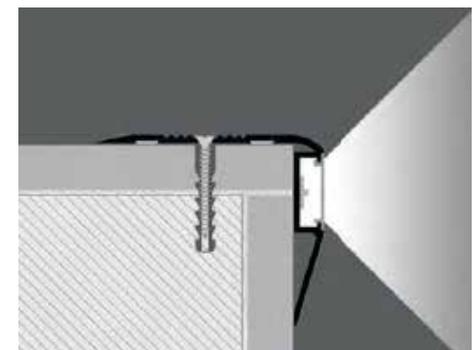

TEXT TEMPLATE FOR TENDERS

Delivery and installation of anodized silver aluminum non-slip profile for stairs composed of a horizontal knurled visible surface, 52.5 mm. in width and a flat vertical one with height of 43.5 mm. The LED system, integrated in the vertical side, with cold / hot / neutral suffused light has an overall height of 17.5 mm. It can be fixed with screws / adhesive, like **PROSTAIR LED** of the Progress Profiles company.

PTRLED... 5040 : Anodised silver aluminium.

Profile Length : _____ mt
 Material : _____ €/mt
 Installation : _____ €/mt
 Total : _____ €/mt