



PROSTEP



DESCRIPTION

PROSTEP is a non-slip profile for stairs composed of a rigid vinyl resin structure and a visible part in vinyl resin / rubber, to be applied during the application of the covering. Its special geometry makes it very elegant and valued also in the case of modern stairs.

MATERIAL

PROSTEP is a non-slip profile for stairs composed of a rigid vinyl resin structure, available in heights 8, 10 and 12.5, and a visible insert in vinyl resin - rubber. The natural aluminium support is provided of a punched flange and dove-tail cavities that guarantee a perfect grip to the adhesive. The non-slip vinyl resin insert, with a visible serrated shaped surface of 33 mm., is available in black, grey, ivory and beige colours. Its particular geometry, combined with the availability of special pieces, make **PROSTEP** a highly sought after profile, even in the case of elegant stairs.

AREAS OF USE

PROSTEP is suitable for every kind of stairs with ceramic, terracotta floorings, wood and natural stone coverings.

WARNINGS


Don't use **PROSTEP** in the swimming pool and in environments where strong substances are present.

MAINTENANCE

PROSTEP does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

LAYING INSTRUCTIONS

1. Choose "**PROSTEP**" according to the tile thickness and desired colour.
2. Lay the tiles on the step rise and apply the adhesive on the area of the step tread, where the profile will be laid.
3. Fill in the cavities on the bottom of the rigid vinyl resin structure and lay the profile on the step tread, resting it on the tiles of the rise covering.
4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile.
5. Grout the joints between the tile and the profile, in order to avoid water stagnation.

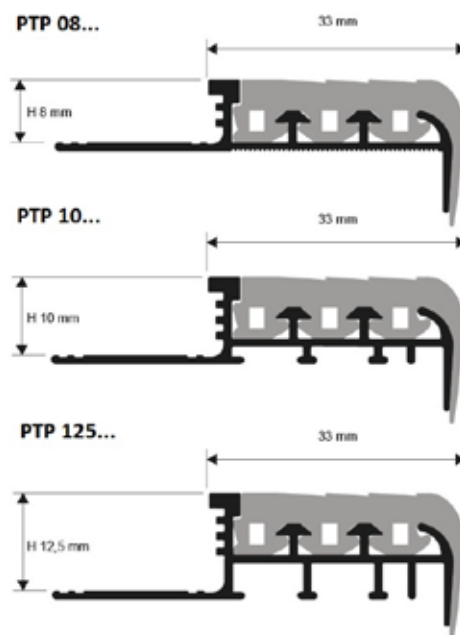

TEXT TEMPLATE FOR TENDERS

Delivery and installation of non-slip profile for stairs composed of a rigid vinyl resin structure with height of 8 / 10 / 12.5 mm, and a visible insert in vinyl resin - rubber. The rigid vinyl resin support is provided of a punched flange and dove-tail cavities that guarantee a perfect grip to the adhesive. The non-slip vinyl resin - rubber insert, in black / grey / ivory / beige colour, has a visible serrated shaped surface of 33 mm. and is provided with end caps, like PROSTEP from Progress Profiles company.

PTP 08... / 10... / 125... : Rigid vinyl resin and vinyl resin / rubber

Profile height : _____ mm
Profile length : _____ mt
Material : _____ €/mt
Application : _____ €/mt
Total value : _____ €/mt