




PROSTYLE 2610



PSYACS 2610F/A

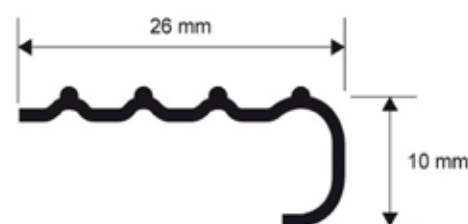

DESCRIPTION

PROSTYLE 2610 is a non-slip profile in stainless steel for stairs, equipped with knurled surface. Its special section makes it an elegant and valued profile also in case of modern stairs.

MATERIAL

PROSTYLE 2610 is a non-slip profile in satin finish stainless steel AISI 304/1.4301-V2A for stairs. It has a horizontal visible knurled surface of 30 mm and a vertical smooth one of 10 mm. The profile is available with adhesive and in the punched version for its fixing with screws. Its special design and ease of application make **PROSTYLE 2610** a greatly appreciated profile.

AREAS OF USE

PROSTYLE 2610 in stainless steel AISI 304/1.4301 – V2A is suitable for every kind of environment where high resistance to mechanical and chemical stresses are required.

WARNINGS

Do not use **PROSTYLE 2610** in stainless steel AISI 304/1.4301 – V2A in the swimming pool and in environments where strong substances are used. For cutting

the profile it is recommend to use a hacksaw with steel blade and treat the cutting surface with a stainless steel passivation product.

MAINTENANCE

PROSTYLE 2610 does not require any special maintenance; it is suggested to clean the profile with normal household cleaning products.


LAYING INSTRUCTIONS

adhesive version:

1. Cut "**PROSTYLE 2610**" to the desired length.
2. Remove all remains of oil, grease and dirt from the surface where the profile will be laid.
3. Remove the silicone film and after checking the support is dry, place the profile correctly and press it without hitting.

punched version:

1. Cut "**PROSTYLE 2610**" of the desired length.
2. Align the profile and mark the position of the holes on the support.
3. Drill the support with a 5 mm diameter bit and insert the 5 x 25 mm. dowels.
4. Align the profile to the holes and screw it to the support.

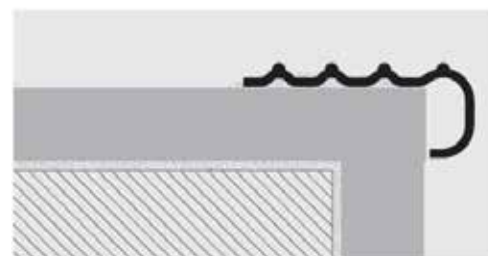

TEXT TEMPLATE FOR TENDERS

Delivery and installation of non-slip profile in satin finish stainless steel AISI 304/1.4301-V2A for stairs to be fix with screws / with adhesive. The profile has a horizontal visible knurled surface of 30 mm and a vertical smooth one of 10 mm, like **PROSTYLE 2610** of the Progress Profiles company.

PSYACS 2610... : F = punched; A = adhesive. Satin finish stainless steel AISI 304/1.4301-V2A

Profile height: _____ mm
Profile length: _____ mt
Material: _____ €/mt
Application : _____ €/mt
Total value: _____ €/mt