


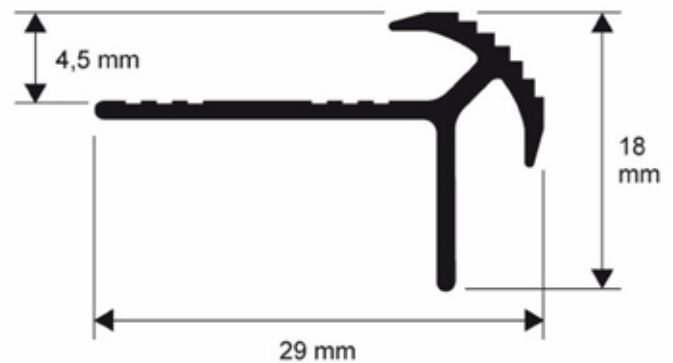

# PROSTYLE KL 10


**PSYKLAA 1045**


## DESCRIPTION

**PROSTYLE KL 10** is a non-slip profile in aluminium for stairs equipped with a knurled surface. The profile can be used to cover the stairs with low thickness tiles. Its special geometry makes it a very elegant and much sought-after profile also in case of modern stairs.

## MATERIAL

**PROSTYLE KL 10** is an anodized silver aluminum non-slip profile for stairs. It is composed by a perforated flange which guarantees a perfect grip to the adhesive and a visible knurled surface at a 45-degree. The profile is available in height of 4.5 mm and protects the edges of the tiles. Its special geometry makes **PROSTYLE KL 10** a very elegant and much sought-after profile also in case of modern stairs.

## AREAS OF USE

**PROSTYLE KL 10** in anodized aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.

## WARNINGS


Do not use **PROSTYLE KL 10** in anodized aluminium outdoors and in environments where aggressive substances are used. Clean immediately the surface of the profile from all remains of adhesive or grout after laying; the permanence of these substances on the surface may lead to formation of non-removable aluminium hydroxide (dark halos).

## MAINTENANCE

**PROSTYLE KL 10** does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

## LAYING INSTRUCTIONS

1. Cut "**PROSTYLE KL 10**" to the desired length.
2. Lay the tiles on the step rise and apply the adhesive on the step tread where the profile will be laid.
3. Lay the profile on the step tread aligning it with the tiles of the step rise.
4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile.
5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

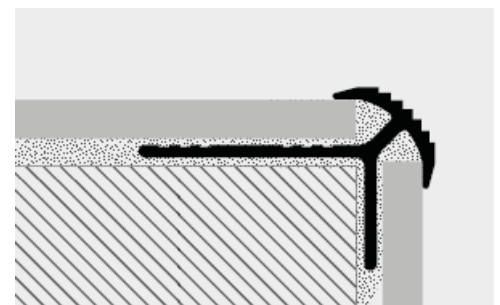

## TEXT TEMPLATE FOR TENDERS

Delivery and installation of anodized silver aluminum non-slip profile for stairs composed by a perforated flange which guarantees a perfect grip to the adhesive and a visible knurled surface at a 45-degree. The profile is available in height of 4.5 mm and protects the edges of the tiles, like **PROSTYLE KL 10** of the Progress Profiles company.

**PSYKLAA 1045:** Anodized silver aluminium.

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt