

PROTERMSTEP ACC



DESCRIPTION

PROTERMSTEP ACC is a profile in stainless steel for stairs that protects the edges of the tread and cover the joint between step rise and tread. Its special geometry makes it an elegant and valued profile also in case of modern stairs.

MATERIAL

PROTERMSTEP ACC is a profile in polished stainless steel AISI 304/1.4301 - V2A for stairs. It is equipped with a punched flange that guarantees a perfect adhesion with the adhesive. The profile, with a visible vertical surface of and of 23.5 - 24 and 46 mm, is available in the heights of 8 - 15 / 10 - 12,5 / 15 - 30 and 20 - 25 mm. it could be used overturned of 180°; for this reason every profile is therefore suitable for two different thicknesses of tiles. Its particular geometry and the availability of special pieces such as junction and external corner, make **PROTERMSTEP ACC** a much-sought after and easy to lay profile.

AREAS OF USE

PROTERMSTEP ACC in stainless steel AISI 304/1.4301 - V2A is suitable for every kind of environment where high resistance to mechanical and chemical stresses are required.

WARNINGS


Don't use **PROTERMSTEP ACC** in stainless steel AISI 304/1.4301 - V2A in the swimming pool and in environments where strong substances are used. For cutting the profile it is recommend to use a hacksaw with steel blade and treat the cutting surface with a stainless steel passivation product.

MAINTENANCE

PROTERMSTEP ACC does not require any special maintenance. It is recommended to clean it with normal household cleaning products.


LAYING INSTRUCTIONS

1. Choose "**PROTERMSTEP ACC**" according to the tile thickness.
2. Lay the tiles on the step rise and apply the adhesive on the step tread, where the profile will be laid.
3. Lay the profile on the step tread, resting it on the tiles of the rise.
4. Apply the adhesive on the step tread and lay the tiles, aligning them with the profile. Remove immediately all the remains of adhesive from the surface of the profile.
5. Grout the joints between the tile and the profile, in order to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

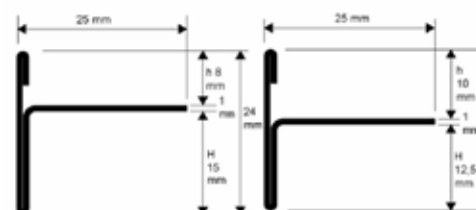

PTSPAC 15

PTSPAC 20

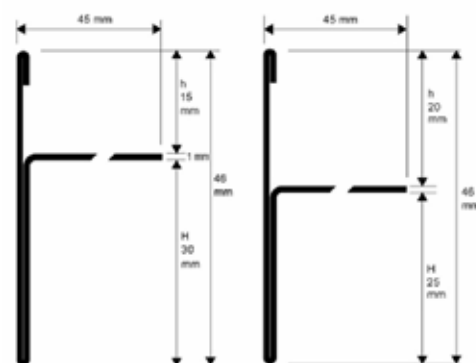

TEXT TEMPLATE FOR TENDERS

Supply and installation of profile for stair in polished stainless steel AISI 304/1.4301-V2A. It is equipped with a punched flange that guarantees a perfect grip to the adhesive. The profile, with a height of 8 - 15 / 10 - 12,5 / 15 - 30 / 20 - 25 mm, has a vertical visible surface of 23.5 / 24 / 46 mm. It is equipped with special pieces such as junction and external corner, like PROTERMSTEP ACC of the Progress Profiles company.

PTSPAC 0815 / 10125 / 1530 / 2025:
 Polished stainless steel AISI 304/1.4301 - V2A

Profile height : _____ mm
 Profile length : _____ €/mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt