

PROWALK ACC



DESCRIPTION

PROWALK ACC is a non-slip profile in stainless steel for stairs, equipped with a knurled surface. Its particular section and the availability in three different vertical heights make it an elegant and valued profile also in case of modern stairs.

MATERIAL

PROWALK ACC is a non - slip profile for stairs in polished stainless steel AISI 304 / 1.4301 - V2A, equipped with a knurled surface. The profile has a knurled horizontal visible surface of 30 mm and a vertical smooth one of 10 - 20 and 30 mm. It is available with adhesive and punched.

The punched version can be fix with screws. Its particular section and the availability in three different vertical heights, make **PROWALK ACC** an elegant and valued profile also in case of modern stairs.

AREAS OF USE

PROWALK ACC in stainless steel AISI 304/1.4301 – V2A is suitable for every kind of environment where high resistance to mechanical and chemical stresses are required. The profile is suitable for food contact after cleaning and removing any surface residue.

WARNINGS

Do not use **PROWALK ACC** in stainless steel AISI 304/1.4301 – V2A in the swimming pool and in environments where strong substances are used. For cutting the profile it is recommend to use a hacksaw with steel blade and treat the cutting surface with a stainless steel passivation product.

MAINTENANCE

PROWALK ACC does not require any special maintenance. It is recommended to clean it with normal household cleaning products.

LAYING INSTRUCTION


1. Choose "**PROWALK ACC**" according to the desired vertical height.
2. Cut "**PROWALK ACC**" to the desired length.

Adhesive version

3. Remove all remains of oil, grease and dirt from the surface where the profile will be laid.
4. When the surface is dry, remove the protective film
5. Correctly position the profile and press it without hitting.

Punched version

3. Align the profile and mark the position of the holes on the support.
4. Drill the support with a 5 mm. diameter bit and insert the 5 x 25 mm. rawlplugs.
5. Align the profile to the holes and screw it.

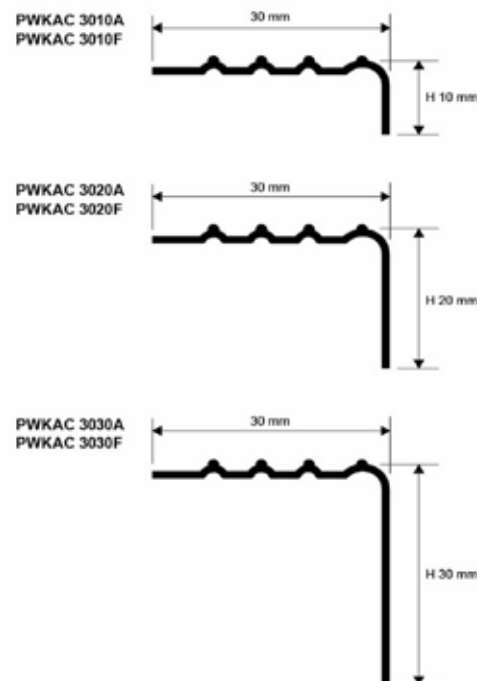

TEXT TEMPLATE FOR TENDERS

Delivery and installation of a non - slip profile in in polished stainless steel AISI 304 / 1.4301 - V2A for stairs. The profile with adhesive / punched profile has a horizontal knurled visible surface of 30 mm and a vertical smooth one of 10 / 20 / 30 mm, like PROWALK ACC of the Progress Profiles company.

PWKAC 3010A / 3020A / 3030A / 3010F / 3020F / 3030F: Polished stainless steel AISI 304 / 1.4301 – V2A.

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt