

# PROWALK



## DESCRIPTION

**PROWALK** is a non-slip profile in aluminium for stairs, equipped with a knurled surface. Its particular section and the availability in three finishes make it an elegant and valued profile also in case of modern stairs.

## MATERIAL

**PROWALK** is a non - slip profile for stairs in anodized silver, gold and bronze aluminium, equipped with a knurled surface. The profile has a knurled horizontal visible surface of 22 and 30 mm and a vertical smooth one of the same dimension. It is available with adhesive, without adhesive and punched. The punched version can be fix with screws. Its particular section and the availability in three finishes make **PROWALK** an elegant and valued profile also in case of modern stairs.

## AREAS OF USE

**PROWALK** in anodized aluminium is suitable for indoors environment where good resistance to mechanical and chemical stresses are required.

## WARNINGS

Do not use **PROWALK** in anodized aluminium in the swimming pool, outdoor and in environments where aggressive substances are present.



## MAINTENANCE

**PROWALK** does not require any special maintenance. It is recommended to clean it with normal household cleaning products.

## LAYING INSTRUCTIONS



1. Choose "**PROWALK**" according to the desired finish and visible surface.
2. Cut "**PROWALK**" to the desired length.

### With and without adhesive version

3. Remove all remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is dry, remove the protective film (apply silicone).
5. Correctly position the profile and press it without hitting.

### Punched version

3. Align the profile and mark the position of the holes on the support.
4. Drill the support with a 5 mm. diameter bit and insert the 5 x 25 mm. rawlplugs.
5. Align the profile to the holes and screw it.

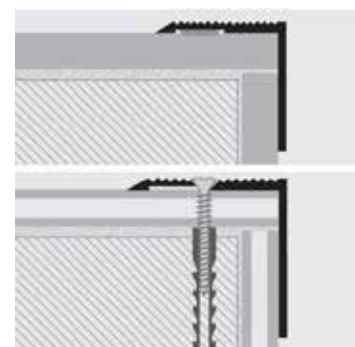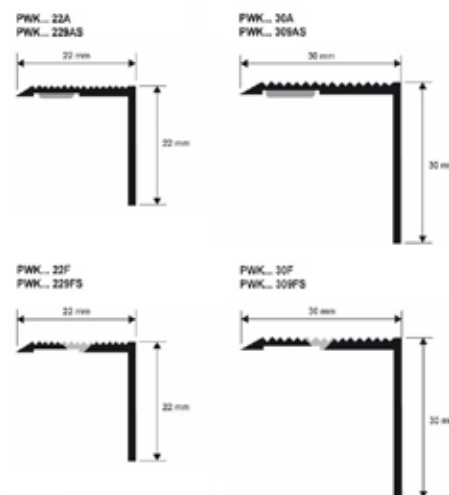

## TEXT TEMPLATE FOR TENDERS

Delivery and installation of a non - slip profile in anodized silver / gold / bronze aluminium for stairs. The punched profile / the profile with / without adhesive has a horizontal knurled visible surface of 22 / 30 mm and a vertical smooth one of the same dimension, like PROWALK of the Progress Profiles company.

**PWK... 22A / 30A / 22F / 30F / 22 / 30 / 229AS / 309AS / 229FS / 309FS:** Anodized aluminium.

Profile height : \_\_\_\_\_ mm  
 Profile length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Application : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt