

PROWALK



DESCRIPTION

PROWALK is a non-slip profile in brass for stairs, equipped with a knurled surface. Its particular section and the ease of installation make it an elegant and valued profile also in case of modern stairs.

MATERIAL

PROWALK is a non - slip profile for stairs in polished brass, equipped with a knurled surface. The profile has a knurled horizontal visible surface of 22 and 30 mm and a vertical smooth one of the same dimension. It is available with adhesive, without adhesive and punched. The punched version can be fix with screws. Its particular section and the ease of installation make **PROWALK** an elegant and valued profile also in case of modern stairs.

AREAS OF USE

PROWALK in polished brass is suitable for every kind of environment where good resistance to mechanical and chemical stresses are required.

WARNINGS

Do not use **PROWALK** in polished brass in the swimming pool and in environments where strong substances are used.



MAINTENANCE

PROWALK does not require any special maintenance. It is recommended to clean it with normal household cleaning products.

LAYING INSTRUCTIONS



1. Choose "**PROWALK**" according to the desired visible surface.
2. Cut "**PROWALK**" to the desired length.

With and without adhesive version

3. Remove all remains of oil, fat and dirt from the surface where the profile will be laid.
4. When the surface is dry, remove the protective film (apply silicone).
5. Correctly position the profile and press it without hitting.

Punched version

3. Align the profile and mark the position of the holes on the support.
4. Drill the support with a 5 mm. diameter bit and insert the 5 x 25 mm. rawlplugs.
5. Align the profile to the holes and screw it.

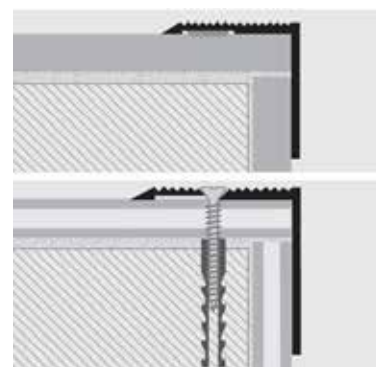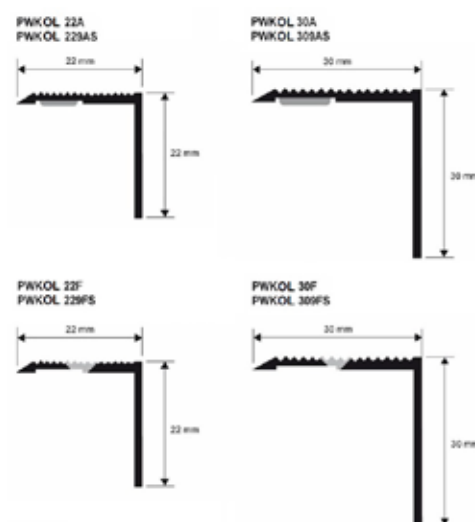

TEXT TEMPLATE FOR TENDERS

Delivery and installation of a non - slip profile in polished brass for stairs. The punched profile / the profile with / without adhesive has a horizontal knurled visible surface of 22 / 30 mm and a vertical smooth one of the same dimension, like PROWALK of the Progress Profiles company.

PWKOL 22A / 30A / 22F / 30F / 22 / 30 / 229AS / 309AS / 229FS / 309FS: Polished brass.

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt