

PROTERRACE DRAIN DRIP

VARNISHED/COATED ALUMINIUM



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS





1. Choose PROTERRACE DRAIN DRIP according to the tile thickness and desired colour. **2.** Fix the external corners to the screed (at least 1 cm from it) with nails. **3.** Fix the draining adhesive stripe in polyurethane on the vertical side of the profile. 4. Cut the PROTERRACE DRAIN FDP at desired length joining it to the corners using the linking elements and fix it with nails to the substrate. 5. Lay the desired waterproofing system. 6. Lay the tiles leaving at 5 mm between the tile and the profile. 7. Seal the space between tile and excell with producting the profile. 7. and profile with PROBAND FIX (PRBFX).

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number Example: PFDPP 10ALGF (seaside) = **PFDPP 10ALGFS**

PROTERRACE ECO DRIP






1. Choose "PROTERRACE ECO DRIP" according to the tile thickness.
2. Cut "PROTERRACE ECO DRIP" to the desired length and fix it to the support with nails. 3. Apply the desired waterproofing system, sealing the joint between profile and waterproofing. 4. Lay the tiles, leaving about 5 mm between tiles and profile. 5. Seal the space between tiles and profile using PROBAND FIX (PRBFX). PROFILE BENDING: 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template: template

HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number Example: PTEDP 10ALGF (seaside) = **PTEDP 10ALGFS**


ROGRESS® OFILES






30/32.5/40


PROTERRACE DRAIN DRIP is an edging profile in varnished aluminium, designed to protect the edges of the tiles on terraces and balconies and to allow the downflow of water. The profile is provided with a flange that ensures the right fixing and an adhesive stripe, which protect the outflow holes to be closed by silicone. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments.

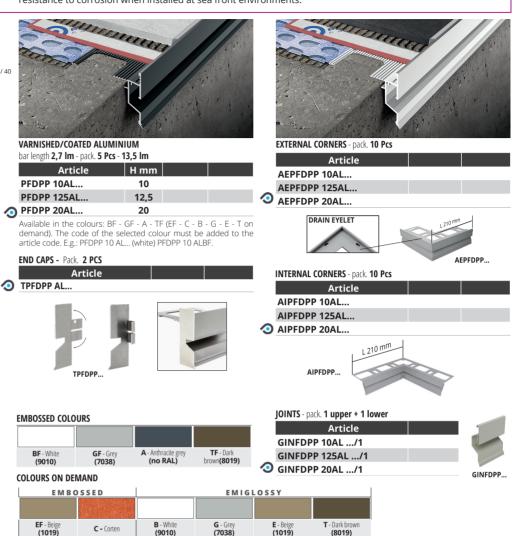

PROTERRACE ECO DRIP is an edging profile in aluminium designed to protect the front of the screed from water penetration and the edges of the tiles laid on terraces and balconies. The profile is equipped with a punched flange that ensures its fixing to the support. The front the profile is equipped with a double drip to improve the push away of water from the wall. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND** 150 with PROBAND KOLL/AB. The product is also available on request in BENDABLE VERSION and with a SPECIAL SEASIDE PRE-TREATMENT which increases its resistance to corrosion when installed at sea front environments.

C - Corten

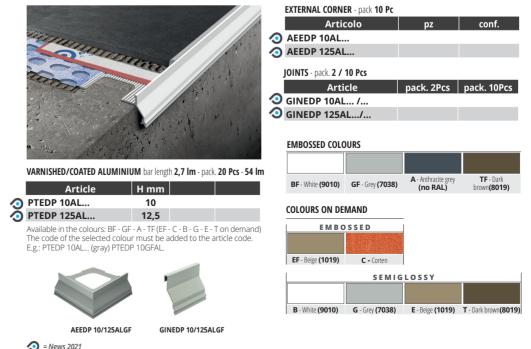



164