
PROTERRACE

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A

PROTERRACE PCG is an edging profile in polished stainless steel INOX AISI 304/1.4301-V2A designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make **PROTERRACE PCG** a much sought after and easy to lay profile. The product is also available on request in **BENDABLE VERSION**



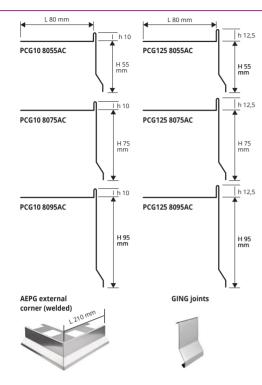


POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film bar length 2,7 lm - pack. 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)

Article	hxHxLmm		
PCG10 8055AC	10 x 55 x 80		
PCG10 8075AC	10 x 75 x 80		
PCG10 8095AC	10 x 95 x 80		
PCG125 8055AC	12,5 x 55 x 80		
PCG125 8075AC	12,5 x 75 x 80		*
PCG125 8095AC	12,5 x 95 x 80		*

EXTERNAL CORNERS - pack. 10 Pcs

Article	
AEPG10 55AC/75AC/95AC	
AEPG125 55AC/75AC/95AC	

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1. Choose "PROTERRACE PCG" according to the tile thickness. 2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it. 3. Cut "PROTERRACE PCG" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions. **4.** Apply the desired waterproofing system. **5.** Lay the tiles, leaving about 5 mm between tiles and profile. 6. Seal the space between tiles and profile with PROBAND FIX (PRRFX)

PROFILE BENDING: 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template:


JOINTS - pack. 10 Pcs

Article	
GING10 55AC/75AC/95AC	
GING125 55AC/75AC/95AC	

PROTERRACE PCG

VARNISHED/COATED ALUMINIUM

PROTERRACE PCG is an edging profile designed to protect the edges of the tiles laid on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support and which is also provided with small holes that allow the momentary fixing of the profile with nails. The availability of special pieces such as external corners and junctions make PROTERRACE PCG a much sought after and easy to lay profile. To reach a right connection between profile and the waterproofing system it's needed to use PROBAND 150 with PROBAND KOLL/AB. The product is also available on request with a SPECIAL SEASIDE PRE-TREATMENT which increases its resistance to corrosion when installed at sea front environments. The product is also available on request in BENDABLE VERSION





HOW TO REQUEST SEASIDE TREATMENT

When placing your order please add S to the article's number Example: PCG10 8055ALGF (seaside) = PCG10 8055ALGFS




VARNISHED/COATED ALUMINIUM

bar length 2,7 lm - pack. 5 Pcs - 13,5 lm (H 55 mm - 18,9 lm)

Article	hxHxLmm		
PCG10 8055AL	10 x 55 x 80		
PCG10 8075AL	10 x 75 x 80		*
PCG10 8095AL	10 x 95 x 80		
PCG125 8055AL	12,5 x 55 x 80		*
PCG125 8075AL	12,5 x 75 x 80		
PCG125 8095AL	12,5 x 95 x 80		*

Available in the colours: BF - GF - A - TF (EF - C - B - G - T - E on demand). The code of the selected colour must be added to the article code. E.g.: PCG10 8055AL... (white) PCG10 8055ALB.

EXEMPLES OF LAYING (for laying instructions, see above)




EMBOSSED COLOURS

BF - White	GF - Grey	A - Anthracite grey	TF - Dark
(9010)	(7038)	(no RAL)	brown (8019)

COLOURS ON DEMAND







FXTFRNAI	CORNERS	- nack	10 Prs

pacia io io			
Article			
AEPG10 55AL/75AL/95AL			
AEPG125 55AL/75AL/95AL			

JOINTS - pack. 10 Pcs Article GING10 55AL.../75AL.../95AL... GING125 55AL.../75AL.../95AL...

The code of the selected colour must be added to the article code. E.g.: AEPG10 55AL... (white) AEPG10 55ALB

