

PRODESO® HEAT GRIP MEMBRANE

It is a polyethylene uncoupling and waterproofing membrane, which allows the vapour management, with reliefs to embed and hold the electric heating cable. It has on the lower side a polypropylene non-woven fabric for a better bond to the substrate. The unique design of **PRODESO® HEAT GRIP MEMBRANE** allows:

- Flexible heating zone selection
- Cost and time saving installation
- Uncoupling crack isolation
- Vapor management
- Waterproofing
- Support load distribution
- Small height increase 8,5 mm



PRODESO® HEAT GRIP MEMBRANE

UNCOUPLING WATERPROOFING MEMBRANE FOR ELECTRIC HEATING - 13/4,5 M²

Article	Width roll H x L lm	Tot. m ²
PDESHG 131/E PRODESO® Heat Grip Membrane (1 lm x 13 lm = 13 m ²)		13
PDESHG 451/E PRODESO® Heat Grip Membrane (1 lm x 4,5 lm = 4,5 m ²)		4,5

PRODESO® HEAT GRIP CABLE

Article	Cable length lm	Heated surface with a cable distance of 6,2 cm	Heated surface with a cable distance of 9,3 cm	Total Power W
PDHGCB 20	19,80	1,19	2,00	250
PDHGCB 26	25,80	1,55	2,50	325
PDHGCB 31	30,80	1,83	3,00	385
PDHGCB 36	36,00	2,14	3,50	450
PDHGCB 40	40,20	2,38	4,00	500
PDHGCB 46	46,20	2,74	4,50	575
PDHGCB 52	52,20	3,10	5,00	650
PDHGCB 62	61,80	3,69	6,00	775
PDHGCB 72	72,00	4,29	7,00	900
PDHGCB 82	82,20	4,88	8,00	1025
PDHGCB 94	94,20	5,60	9,00	1175
PDHGCB 104	103,80	6,19	10,00	1300
PDHGCB 132	132,00	7,86	12,50	1650
PDHGCB 158	157,80	9,40	15,00	1875

PRODESO® HEAT GRIP CABLE - 450 M

CONSTANT POWER SILICONE CABLE - DIAMETER 6,5 mm - 230 V

Article	Diameter (mm)	Length lm	Power W/lm
PDHCB450	6,5	450 M	12,5W

PRODESO® HEAT GRIP CABLE KIT

Article	Description
PDHGCK110	1 ml heat shrink sheath + 10 cable lugs
PDHGCK550	5 ml heat shrink sheath + 50 cable lugs



PRODESO® HEAT GRIP POWER CABLE

Article	Cable length lm
PDHGCBF	2,5



PRODESO® HEAT GRIP THERMOSTAT KIT - TOUCH SCREEN - WI-FI

KIT DIGITAL THERMOSTAT

Article	Description
PDHTSMWTK	Kit complete with Wi-Fi digital thermostat
PDHTSMWT 230	Wi-Fi digital thermostat



PRODESO® HEAT GRIP THERMOSTAT KIT - TOUCH SCREEN - WI-FI

PDHTSKT 230V

Article	Description
PDHTSMWT 230	Touch screen Wi-Fi digital thermostat
PDSOT	Floor temperature sensors
PDSHI	Flush-mounting box
PDHCF 202	Flexible corrugated pipe
PCBLF	Plastic Clip to hold heating cable

PRODESO® HEAT CABLE CLIP

Plastic Clip to hold heating cable on PRODESO® HEAT MEMBRANE (40 mm x 5 mm)


Article	Pcs/Pack.
PCBLF	200



PROECOFON

Roll of closed-cell polyethylene with adhesive used as edging between the wall and screed or where there are expansion joints.

Article	Thick. x H mm	lm/roll
PEF 550A	5 X 50	25




ROLLER FOR CABLE INSTALLATION

Aluminum roller 15 cm long, fixed to a metal structure and equipped with an ergonomic plastic handle, facilitates and speeds up the insertion of the heating cables between the reliefs of the membranes PRODESO® HEAT e PRODESO® HEAT GRIP.

Article	L cm	Pcs/pack
PSC	15	1



LAYING'S SECTION

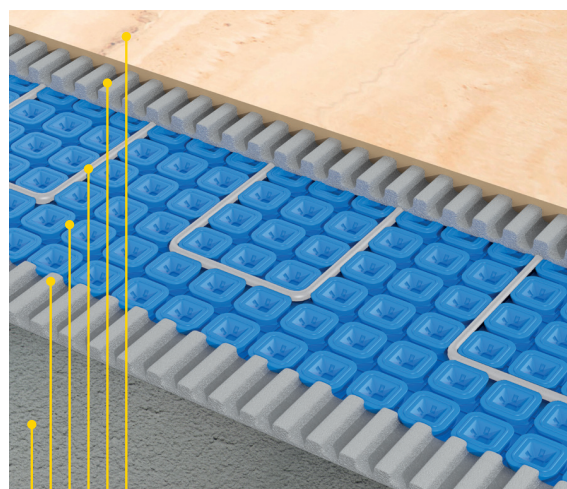

- 1 CERAMIC OR PORCELAIN TILES
- 2 THIN-SET / ADHESIVE
- 3 PRODESO® HEAT GRIP CABLE
- 4 PRODESO® HEAT GRIP MEMBRANE
- 5 THIN-SET / ADHESIVE
- 6 SCREED / PLYWOOD / OSB