


# PROFOIL PRO

ROLLS IN HDPE AND PP

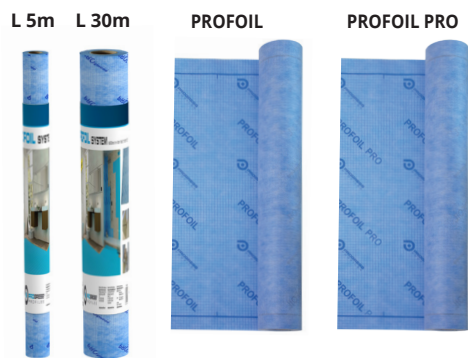

**PROFOIL** is a waterproofing polyethylene membrabe with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

**PROFOIL PRO** is a waterproofing elastic polyethylene membrane with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

**PROFOIL - ROLLS IN HDPE AND PP - Thickness 0,42 mm**

Article	Width roll H x L Im	total m <sup>2</sup>	Rolls/pallet
PFLO 0430	1 x 30	30	40
PFLO 0405	1 x 5	5	154

**PROFOIL PRO - ELASTIC ROLLS IN HDPE AND PP - Thickness 0,42 mm**

Article	Width roll H x L Im	total m <sup>2</sup>	Rolls/pallet
PFLOPR 0430	1 x 30	30	40



### AREAS OF USE

• **Use.** Waterproofing of substrates and vertical structures before the laying of ceramic in areas subject to occasional contact with water like bathrooms and kitchens, saunas and Turkish baths. **PROFOIL PRO** can also be used in environments with permanent contact with water like swimming pools and tanks. • **Don't use.** On bituminous coverings, over insulating panels and lightweight screed.

### WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.

# PROFOIL PASTE

WATERPROOFING ELASTIC MEMBRANE



**PROFOIL PASTE** is a ready to use thin-layer waterproofing elastic membrane with low emissions of volatile organic compounds.

**WATERPROOFING ELASTIC MEMBRANE**

Article	Kg/Bucket	Bucket/ Pallet
PFLOPST 04	4	64
PFLOPST 10	10	36

### WARNINGS

**Don't use.** For external application, on wet surfaces or substrates subject to moisture rising, in environments where water is always present, pools and tanks. Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications please call the technical department.

# PROBAND 150/250

ELASTIC ROLLS IN HDPE AND PP



**PROBAND 150/250** is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.


**ELASTIC ROLLS IN HDPE AND PP - Thickness 0,42 mm**

Article	Roll width H mm x L Im	Rolls/Pack.
PRBPE 1507	150 x 7,5	16
PRBPE 1530	150 x 30	6
PRBPE 2530	250 x 30	3

### AREA OF USE

• **Use** - Terraces, balconies and outside surfaces of any dimension, bathrooms, showers, swimming pools and tanks. To realize waterproofing joints between floor and wall and along two adjacent rolls of **PROFOIL**, **PRODESOS® MEMBRANE SYSTEM** and **PRODESOS® HEAT/GRIP SYSTEM**. • **Don't use** - On bituminous coverings, over thermal-insulating layer and lightweight screed. With adhesives containing solvents.

# PREFORMED CORNERS and PIPE COLLAR

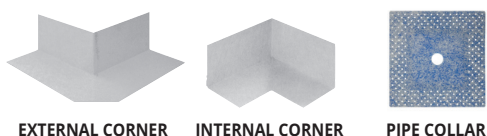

EXTERNAL CORNER

INTERNAL CORNER

PIPE COLLAR

Internal and external preformed corners and pipe collar in polyethylene provided on both side with nonwoven polypropylene fabric that guarantees its adhesion to the support. Use on Terraces, balconies and outside surfaces of any dimension, bathrooms, showers, swimming pools and tanks. To realize waterproofing joints between floor and wall and along two adjacent rolls of **PROFOIL**, **PRODESOS® MEMBRANE SYSTEM** and **PRODESOS® HEAT/GRIP SYSTEM**

**PREFORMED CORNERS AND PIPE COLLAR IN HDPE AND PP**

Thickness 0,42 mm


Article	H x L mm	Rolls/Pack.
PRBI (internal)	150 x 150	10 Pcs
PRBE (external)	150 x 150	10 Pcs
PRBT (pipe collar)	125 x 125	10 Pcs

### WARNINGS

• **Don't use** - On bituminous coverings, over thermal-insulating layer and lightweight screed. With adhesives containing solvents. adhesive.

# PRODRAIN 10

MEMBRANA DRENANTE

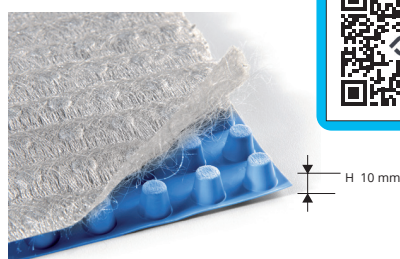

**DRAINAGE MEMBRANE**

Thickness H 10 mm - Total 12,0 m<sup>2</sup> - 6 ROLLS PER PALLET = 72 m<sup>2</sup>

Article	H roll (MT)	L roll (MT)	roll x pallet
PDRI 10	0,96	12,5	6

### AREAS OF USE

• **Use.** Outside on concrete sloping suitably waterproofed such as terraces, balconies and pavements and in contact with waterproofed vertical structures such as foundation walls. Highly resistant to saline solutions, acid and alkaline, alcohol and oils. In case of special products consult the technical department. • **Don't use.** On concrete waterproofed without adequate slope to the drained water runoff. As soundproof and thermal-insulating layer.