


PROTERRACE PC is a perimeter profile in polished stainless steel inox aisi 304/1.4301-V2A designed to protect the screed on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request in **BENDABLE VERSION**.

PROTERRACE PC


POLISHED STAINLESS STEEL AISI 304/1.4301-V2A



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

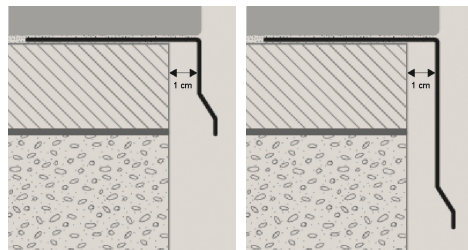

1. Choose "PROTERRACE PC" according to the desired height.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions.
4. Apply the desired waterproofing system.
5. Lay the tiles. **PROFILE BENDING:** 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

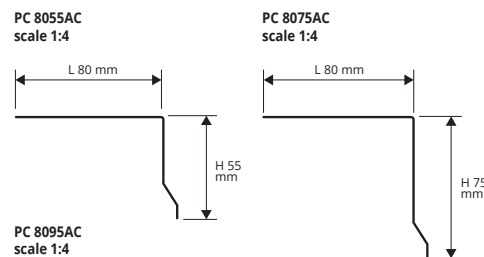

POLISHED STAINLESS STEEL AISI 304/1.4301-V2A with protective film
bar length 2,7 lm - pack. 7 Pcs - 18,9 lm (H 75 mm - 13,5 lm - H 95 mm - 5,4 lm)

Article	L x H mm	€/lm	€/Pc
PC 8055AC	80 x 55		
PC 8075AC	80 x 75		*
PC 8095AC	80 x 95		*


EXTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/Pack.
AEPC 55AC/75AC/95AC/10		

JOINTS - pack. 10 Pcs

Article	€/Pc	€/Pack.
GINC 55AC/75AC/95AC/10		

* Corners and joints of the on demand profiles are also on demand

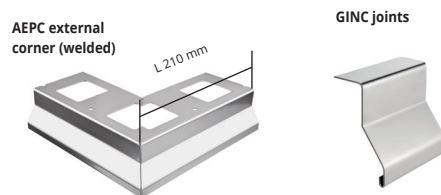


PROTERRACE PC is a perimeter profile in varnished aluminium designed to protect the screed on terraces and balconies and to allow a correct water discharge. The profile is equipped with a punched flange that ensures its fixing to the support. The flange is also provided with small holes that allow the momentary fixing of the profile with nails. To reach a right connection between profile and the waterproofing system it's needed to use **PROBAND 150** with **PROBAND KOLL/AB**. The product is also available on request with a **SPECIAL SEASIDE PRE-TREATMENT** which increases its resistance to corrosion when installed at sea front environments. The product is also available on request in **BENDABLE VERSION**.

PROTERRACE PC


VARNISHED/COATED ALUMINIUM



EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS

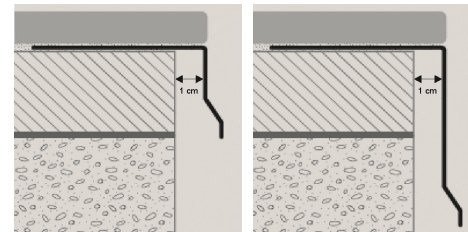

1. Choose "PROTERRACE PC" according to the desired colour and height.
2. Fix the external corners to the screed with nails taking care to separate them at least 1 cm from it.
3. Cut "PROTERRACE PC" to the desired length. Lay the profile and fix it with nails. Connect it with the corners using the junctions.
4. Apply the desired waterproofing system.
5. Lay the tiles. **PROFILE BENDING:** 1) Cut the anchoring flange into sections and engrave the metal close to the vertical side 2) bend the profile with the help of a template;

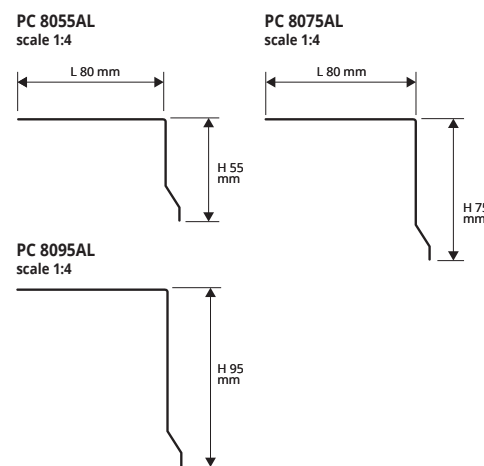

VARNISHED/COATED ALUMINIUM - bar length 2,7 lm
pack. 7 Pcs - 18,9 lm (H 75 mm - 13,5 lm - H 95 mm - 5,4 lm)

Article	L x H mm	€/lm	€/Pc
PC 8055AL...	80 x 55		*
PC 8075AL...	80 x 75		*
PC 8095AL...	80 x 95		*

The code of the selected colour must be added to the article code.
E.g.: PC 8055AL... (white) PC 8055ALB.

SEMIGLOSSY COLOURS ON DEMAND

B - White (9010)	G - Grey (7038)	T - Dark brown (8019)
E - Beige (1019)		

EMBOSSED COLOURS ON DEMAND

BF - White (9010)	GF - Grey (7038)	A - Anthracite grey (no RAL)
EF - Beige (1019)	C - Corten	TF - Dark brown (8019)

EXTERNAL CORNERS - pack. 10 Pcs

Article	€/Pc	€/Pack.
AEPC 55AL.../75AL.../95AL.../10		


The code of the selected colour must be added to the article code. E.g.: AEPC 55AL... (white) AEPC 55ALB.

* Corners and joints of the on demand profiles are also on demand

JOINTS - pack. 10 Pcs

Article	€/Pc	€/Pack.
GINC 55AL.../75AL.../95AL.../10		

HOW TO REQUEST SEASIDE TREATMENT
When placing your order please add S to the article's number
Example: PC 8055ALGF (seaside) = **PC 8055ALGFS**
price for seaside treatment +50% on the gross price.

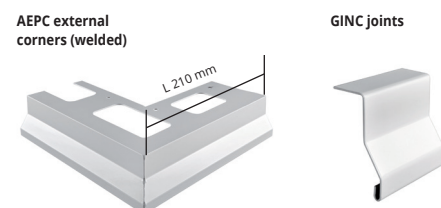

* = Production on demand with minimum quantity of 100 pcs. Production delay 4/5 weeks. Price to be agreed

Prices are referred to whole packs, 10% increase for minimum orders of 10 pcs, 20% increase for orders of less than 10 pcs.