


It is an uncoupling and waterproofing membrane for problematic substrates, balconies, terraces and horizontal surfaces of any size without expansion joints in the screed before the laying of ceramic and natural stone. **PRODESO®** ensures the laying of the flooring and the waterproofing of the substrate also in case of old tiles, on cracked and not perfectly cured substrates, and therefore with possible vapour pressure.

# PRODESO® MEMBRANE

UNCOUPLING & WATERPROOFING  
MEMBRANE

UNCOUPLING & WATERPROOFING MEMBRANE - Thickness H 3,5 mm

Article	H roll (LM)	L roll (LM)	roll x pallet	€/lm	€/Roll	€/pallet
PDES 3530/EN	1	30	8			
PDES 3505/EN	1	5	-			

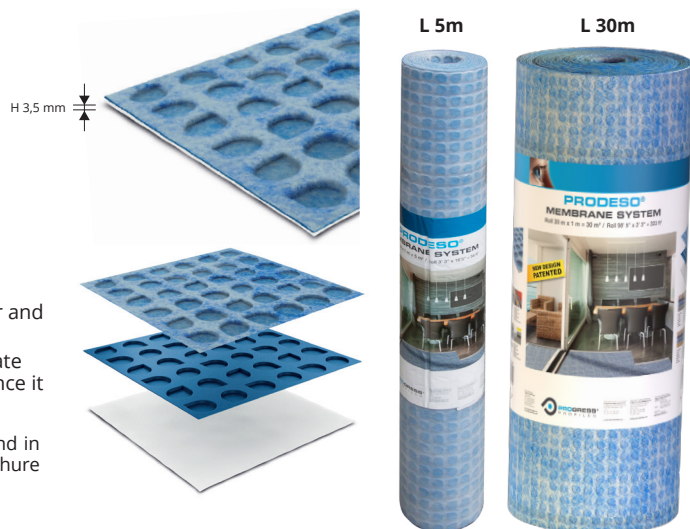

## WHY USE PRODESO® MEMBRANE SYSTEM

**Time Efficient:** PRODESO® Membrane reduces drastically the installation times because from the installation of the membrane up to the laying of flooring you can work without interruption.

**Flexible:** it is suitable for every types of subfloor including very large surfaces both indoor and outdoor.

**Safe:** it is suitable for substrates with cracks as it does not transmit tension of the substrate to the tile coverings and vice versa. It is also suitable on substrates not perfectly cured since it allows the vapour management.

### WARNINGS

Do not lay tiles with a size less than 5 x 5 cm. The technical and application details can be found in the **PRODESO® MEMBRANE SYSTEM** brochure. For other informations not described in the brochure **PRODESO® MEMBRANE SYSTEM**, refer to the technical department.

**PROBAND 150/250** is a waterproofing polyethylene tape with nonwoven polypropylene fabric on both side that guarantees high adhesion to the support.

# PROBAND 150/250

ROLLS IN HDPE AND PP

ELASTIC ROLLS IN HDPE AND PP - Thickness 0,42 mm

Article	H mm x L lm	Rolls/Pack.	€/ml	€/roll	€/Pack.
PRBPE 1507	150 x 7,5	16			
PRBPE 1530	150 x 30	6			
PRBPE 2530	250 x 30	3			

For the indicative consumption of proband koll AB during the installation of the PROBAND, consult the technical data sheet of PROBAND 150/250

### AREA OF USE

• **Use** - Terraces, balconies and outside surfaces of any dimension, bathrooms, showers, swimming pools and tanks. To realize waterproofing joints between floor and wall and along two adjacent rolls of **PROFOIL**, **PRODESO® MEMBRANE SYSTEM** and **PRODESO® HEAT/GRIP SYSTEM**

• **Don't use** - On bituminous coverings, over thermal-insulating layer and lightweight screed. With adhesives containing solvents.

### WARNINGS

Store in a cool and dry place avoiding direct sunlight and sources of heat. Read the data sheet before applying; in case of special applications call the technical department



### RECOMMENDED ADHESIVES FOR THE LAYING OF PRODESO® MEMBRANE

 <b>KERAFLEX EASY</b> <b>ULTRALITE S1</b> <b>KERAFLEX MAXI S1</b>	 <b>F.55 CERMONO PLUS</b> <b>F.55 CERFIX</b> <b>F.55 CERMONO RAPIDO</b>	 <b>EXTRA 30 MAXI</b> <b>ADEFLEX GREEN S1</b> <b>EXTRA 30 POWER</b>	 <b>H40 NO LIMITS</b> <b>H40 REVOLUTION</b> <b>H40 EXTREME</b>	 <b>SUPERFLEX K77</b> <b>POWERFLEX K50</b> <b>LITOSTONE K99</b>	 <b>FLEXBOND C2S1</b> <b>FLEXBOND LIGHT C2S1</b> <b>WETBOND RAPID C2F</b>	 <b>GRIGOKOLL TEX</b> <b>GRIGOKOLL MAX</b> <b>GRIGOKOLL VELOX</b>
 <b>CERAM 255 STARFLEX</b> <b>CERAM 255 EASY S1</b> <b>CERAM 270 MULTIFLOW</b>	 <b>ULTRAGRES 440</b> <b>ULTRAGRES FLEX</b> <b>ULTRAGRES FAST</b>	 <b>PERICOL R-FLEX</b> <b>PERICOL EXTRA FLEX</b> <b>PERICOL FLEX</b>	 <b>335 MAXI S</b> <b>335 SUPER FLEX</b> <b>325 RAPID FL</b>	 <b>ARDEX X 78</b> <b>ARDEX X 90 OUTDOOR</b> <b>ARDEX AF 495</b>	 <b>MUREFLEX MFK 45</b> <b>ADESIVO FBS 75</b> <b>MAXIMO M 41</b>	 <b>RT UNIVERSAL</b> <b>RT HI TECH</b> <b>RT RAPID FLEX</b>
 <b>SEYFLEX S1</b> <b>SEYULTRA T</b> <b>TIXOSEY</b>	 <b>KRISTAL C2TE</b> <b>EXTRA C2S1</b>	 <b>AZ 59</b> <b>RAPID MAXI</b> <b>SPECIAL ONE</b>	 <b>CERMIPLUS 2.0</b> <b>CERMIPLUS XL FLEX 2.0</b>	 <b>FORTEM</b> <b>MAXIM</b>	 <b>BENFERFLEX+S1</b> <b>BENFERFLEX C2</b> <b>BENFERFLEX + FAST-S1</b>	