

PRODESO® HEAT GRIP MEMBRANE

It is a polyethylene uncoupling and waterproofing membrane, which allows the vapour management, with reliefs to embed and hold the electric heating cable. It has on the lower side a polypropylene non-woven fabric for a better bond to the substrate. The unique design of **PRODESO® HEAT GRIP MEMBRANE** allows:

- Flexible heating zone selection
- Cost and time saving installation
- Uncoupling crack isolation
- Vapor management
- Waterproofing
- Support load distribution
- Small height increase 8,5 mm



PRODESO® HEAT GRIP CABLE


It is a constant power electric heating cable to be embedded between the reliefs of **PRODESO® HEAT GRIP MEMBRANE**. The cable distance can be 6.2 or 9.3 cm



PRODESO® HEAT GRIP THERMOSTAT KIT

It is composed of a Wi-Fi digital thermostat, a flush-mounting box, corrugated pipe, two floor temperature sensors and clips to fix the cable.

LAYING'S SECTION

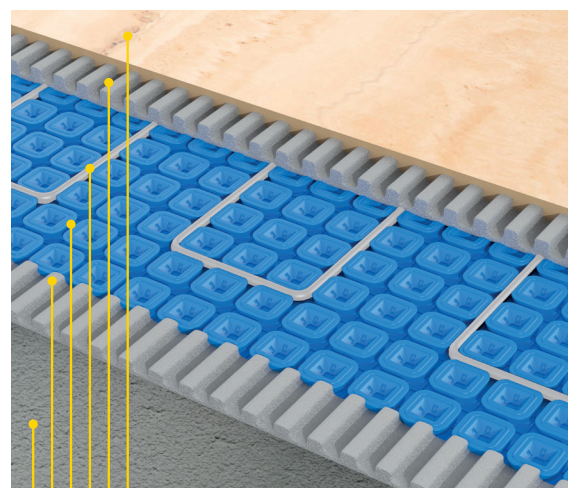

- 1 CERAMIC OR PORCELAIN TILES
- 2 THIN-SET / ADHESIVE
- 3 PRODESO® HEAT GRIP CABLE
- 4 PRODESO® HEAT GRIP MEMBRANE
- 5 THIN-SET / ADHESIVE
- 6 SCREED / PLYWOOD / OSB

PRODESO® HEAT GRIP MEMBRANE

UNCOUPLING WATERPROOFING MEMBRANE FOR ELECTRIC HEATING - 13/4,5 M²

Article	Description	H x L lm	Tot. m ²	€/m ²	€/roll
PDESHG 131/E	Prodeso® Heat Grip membrane	(1 ml x 13 ml = 13 m ²)	13		
PDESHG 451/E	Prodeso® Heat Grip membrane	(1 ml x 4,5 ml = 4,5 m ²)	4,5		

PRODESO® HEAT GRIP CABLE

Article	Cable length lm	Heated surface on the WALL (6,2 cm)	Heated surface on the FLOOR (9,3 cm)	Total Power W	€/Roll
PDHGCB 20	19,80	1,19 m ²	2,00 m ²	250 W	
PDHGCB 26	25,80	1,55 m ²	2,50 m ²	325 W	
PDHGCB 31	30,80	1,83 m ²	3,00 m ²	385 W	
PDHGCB 36	36,00	2,14 m ²	3,50 m ²	450 W	
PDHGCB 40	40,20	2,38 m ²	4,00 m ²	500 W	
PDHGCB 46	46,20	2,74 m ²	4,50 m ²	575 W	
PDHGCB 52	52,20	3,10 m ²	5,00 m ²	650 W	
PDHGCB 62	61,80	3,69 m ²	6,00 m ²	775 W	
PDHGCB 72	72,00	4,29 m ²	7,00 m ²	900 W	
PDHGCB 82	82,20	4,88 m ²	8,00 m ²	1025 W	
PDHGCB 94	94,20	5,60 m ²	9,00 m ²	1175 W	
PDHGCB 104	103,80	6,19 m ²	10,00 m ²	1300 W	
PDHGCB 132	132,00	7,86 m ²	12,50 m ²	1650 W	
PDHGCB 158	157,80	9,40 m ²	15,00 m ²	1875 W	

PRODESO® HEAT GRIP CABLE - 450 M

CONSTANT POWER SILICONE CABLE - DIAMETER 6,5 mm - 230 V

Article	Diameter (mm)	Length lm	Power W/lm	€/roll
PDHGCB450	6,5	450 M	12,5W	

PRODESO® HEAT GRIP THERMOSTAT KIT - TOUCH SCREEN - WI-FI

KIT DIGITAL THERMOSTAT

Article	Description	€/Kit
PDHSTMWTK	Kit complete with Wi-Fi digital thermostat	



DIGITAL THERMOSTAT

Article	Description	€/Kit
PDHSTMWT 230	Wi-Fi digital thermostat	



ROLLER FOR CABLE INSTALLATION

Aluminum roller 15 cm long, facilitates and speeds up the insertion of the heating cables between the reliefs of the membranes PRODESO®HEAT e PRODESO® HEAT GRIP.


Article	L cm	Pcs/pack	€/Pcs
PSC	15	1	



PROECOFON


Roll of closed-cell polyethylene with adhesive used as edging between the wall and screed or where there are expansion joints.

Article	Thick. x H mm	lm/roll	€/lm	€/roll
PEF 550A	5 X 50	25		



PRODESO® HEAT GRIP CABLE KIT

Article	Description	€/Kit
PDHGCK110	1 ml heat shrink sheath + 10 cable lugs	
PDHGCK550	5 ml heat shrink sheath + 50 cable lugs	



PRODESO® HEAT GRIP POWER CABLE

Article	Cable length lm	€/pc.	€/lm
PDHGCBF	2,5		



PRODESO® HEAT CABLE CLIP

Plastic Clip to hold heating cable on PRODESO® HEAT MEMBRANE (40 mm x 5 mm)

Article	€/Pc	Pcs/Pack.
PCBLF		200

